

# BACK BAR COOLERS

EBB - Series • EBB23 • EBB48 • EBB48-SS • EBB59 • EBB59-SS • EBB69 • EBB90



▲ EBB23



▲ EBB48



▲ EBB48-SS



▲ EBB59



▲ EBB59-SS



▲ EBB69



▲ EBB90

## Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior. Stainless steel exterior for models EBB48-SS and EBB59-SS.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Four pre-installed 5" swivel casters with locks on front set (applies only to model EBB23).
- Built-in caster thread receptacles for all models.

## Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing (Blizzard R290 condensing unit is back mounted for model EBB23).
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

## Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

## Doors

- Textured laminate, black vinyl exterior with galvanized steel interior. Stainless steel exterior and galvanized interior for models EBB48-SS and EBB59-SS.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

## Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

## Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


## Options

- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




# Dimensions

**Side View (all models except EBB23)**

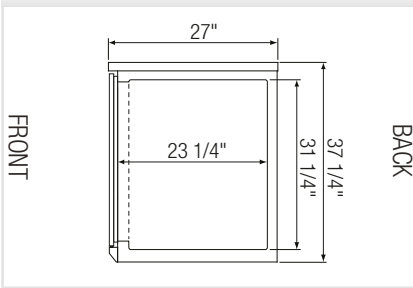


**Side View (EBB23)**


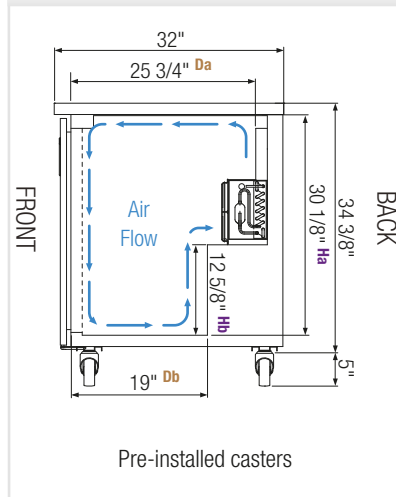


Equipped with 9 ft long NEMA 5-15P plug.

**Air Flow (all models except EBB23)**









Front view of cabinet interior demonstrates air circulation from left to right.

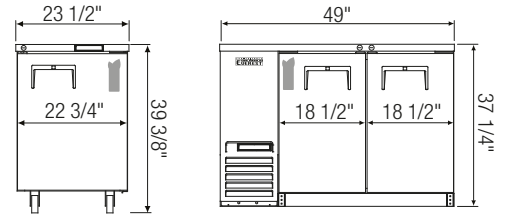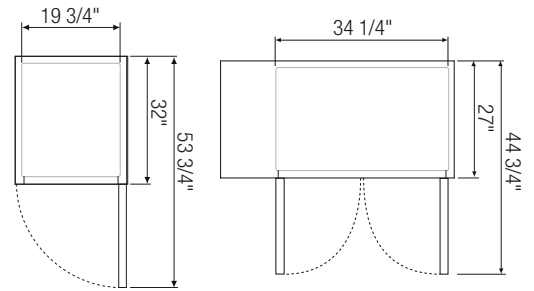

▲ EBB23

▲ EBB48(SS)

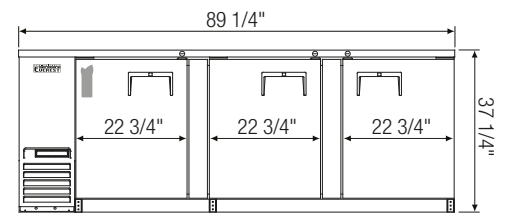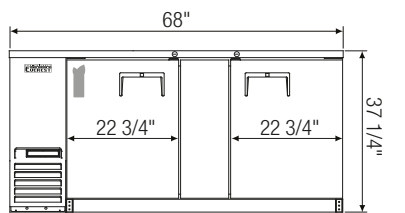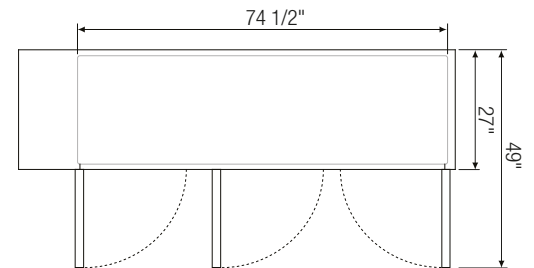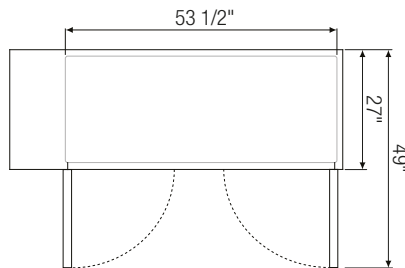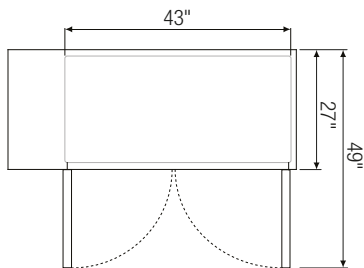

▲ EBB59(SS)

▲ EBB69

▲ EBB90

Model	Ref/ Frz/ Dual	# of Doors	Shelves	Capacity (Cu. Ft.)	HP	BTU/HR †	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D	H
EBB23	Ref	1	2	8	1/5	1,655	R-290	220	125	115-60-1	2.5	167	23 1/2	32	39 3/8*
EBB48(SS)	Ref	2	4	14	1/4+	1,926	R-290	490	344	115-60-1	3.5	269	49	27	37 1/4
EBB59(SS)	Ref	2	4	20	1/4+	1,926	R-290	640	408	115-60-1	3.5	291	57 3/4	27	37 1/4
EBB69	Ref	2	4	24	1/4+	1,926	R-290	800	504	115-60-1	3.5	323	68	27	37 1/4
EBB90	Ref	3	6	32	1/3	2,311	R-290	1120	696	115-60-1	2.5	436	89 1/4	27	37 1/4

\*: Height includes 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Da, Db : Interior Depth Ha, Hb, Hc : Interior Height

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity ( ) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.