

# Chef Bases (Four Drawer)

SIDE MOUNTED CONDENSING UNIT **ECB SERIES**



**ECB72D4**



**ECB82D4**



**ECB82-84D4**



**ECB82-86D4**



**ECB96D4**

## Cabinet Construction

- Heavy duty stainless steel interior/exterior with rounded corners for a hazard-free workspace.
- Open spaced interior with no walls between compartments.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- 16-gauge stainless steel worktop has extra layer of high-grade insulation material and integrated air chamber/vents to redirect and mitigate heat. Prevents heat-induced warping of the worktop while keeping the cabinet cold and energy cost low.
- Thick gauge stainless steel corner guards keep mounted cooking equipment from sliding off the worktop.
- Heavy duty stainless steel grips offer secure maneuverability.
- 12-gauge metal caster brackets support additional weight of mounted cooking equipment.
- Six 5" swivel casters with locks on front set. Three front leg stabilizers standard for all models.

## Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct ensures optimal cold air circulation.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning.
- Pressure relief devices allow rapid cabinet re-entry.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

## Drawers

- Heavy duty stainless steel interior/exterior.
- 2.5" thick high density polyurethane insulation.
- Thick gauge, stainless steel frames with low-friction ball bearings.
- Snap-in, heat resistant, magnetic gaskets.
- High strength, recessed handles.
- NSF certified polycarbonate 4" deep pans (refer to the website for pan configurations).

## Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temp-set range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.




## Recommended Operating Conditions

- A minimum clearance of 6" is required between the cooking equipment's heating element and the Chef Base worktop.


## Options

- 3" swivel casters with locks.
- 3.5"-6" height-adjustable and interchangeable legs.


↔ = Interior Dimensions   ← → = Exterior Dimensions

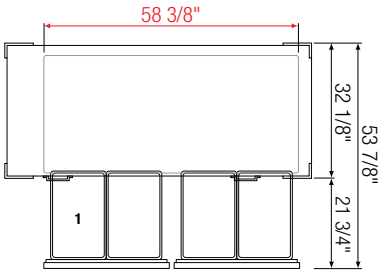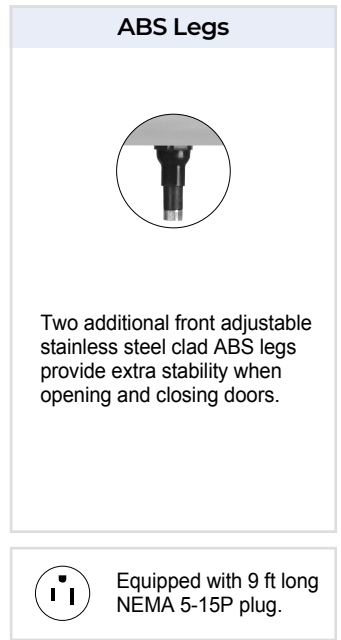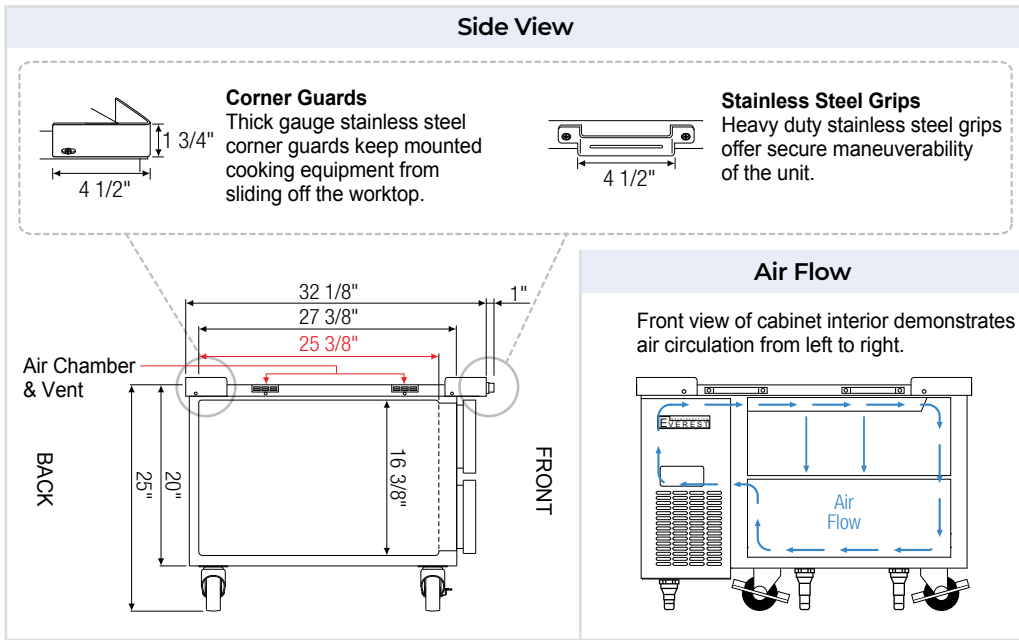




ECB72D4

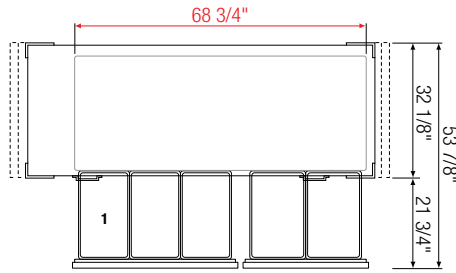

ECB82D4 • ECB82-84D4 • ECB82-86D4

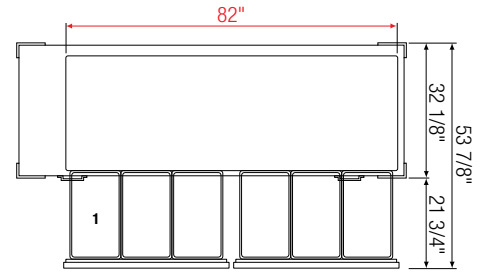

ECB96D4

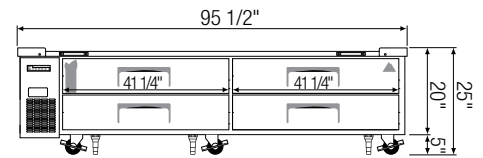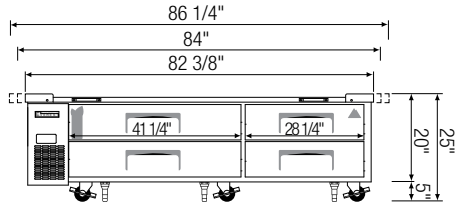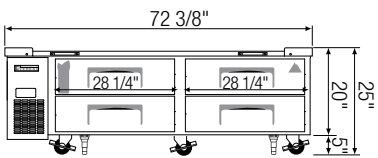

Model	Ref/ Frz/ Dual	# of Doors	Max. Weight Support Capacity (LBS)	HP	BTU/HR †	Refrigerant	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D <sup>a</sup>	H <sup>*</sup>
ECB72D4	Ref	4	1,084	1/4+	1,926	R290	1 x 8	115-60-1	3.5	421	72 3/8	32 1/8	20
ECB82D4	Ref	4	1,084	1/3	2,311	R290	1 x 10	115-60-1	2	540	82 3/8	32 1/8	20
ECB82-84D4	Ref	4	1,084	1/3	2,311	R290	1 x 10	115-60-1	2	545	84	32 1/8	20
ECB82-86D4	Ref	4	1,084	1/3	2,311	R290	1 x 10	115-60-1	2	550	86 1/4	32 1/8	20
ECB96D4	Ref	4	1,434	1/3	2,311	R290	1 x 12	115-60-1	2	580	95 1/2	32 1/8	20

\* Height does not include 5" for casters.

† Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a Depth does not include 1" for stainless steel grip.

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (†) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.