



ECF1

Cabinet Construction

- Heavy duty stainless steel countertop and rail with textured laminate, black vinyl exterior.
- Open spaced interior with no walls between compartments.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Four pre-installed 5" swivel casters with locks on front set.

Refrigeration System

- Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Tinted stainless steel exterior with galvanized steel interior.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic gasket for ease of cleaning.
- High strength, recessed handles.
- Pre-installed locks keep your items safe from theft

Draft Arms



- NSF certified, 3" diameter insulated stainless steel draft arm with single stout faucet complete with ball lock fitting.
- One 2-way air distributor.
- One 22 cubic feet aluminum nitrogen gas tank.
- One dual gauge nitrogen regulator with shutoff valve and ball lock fitting.
- NSF certified 5 gallon ball lock cornelius keg.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temp-set range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Dual or triple faucet draft arms and matching air distributors.
- 3" swivel casters with locks.
- 3.5"-6" height-adjustable and interchangeable legs.

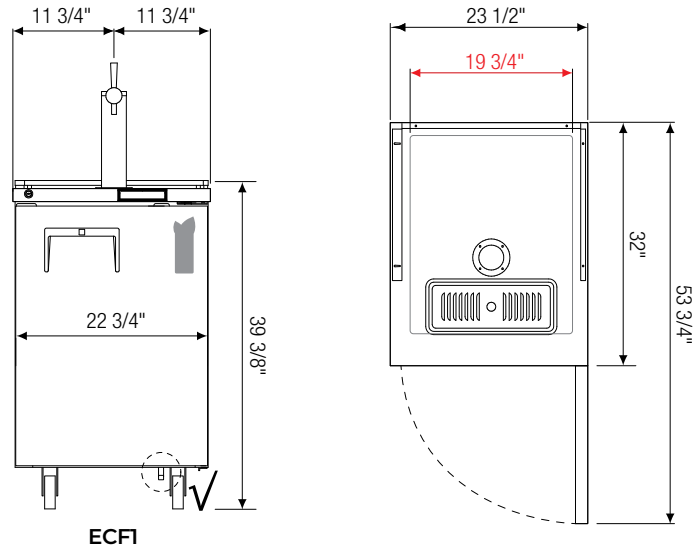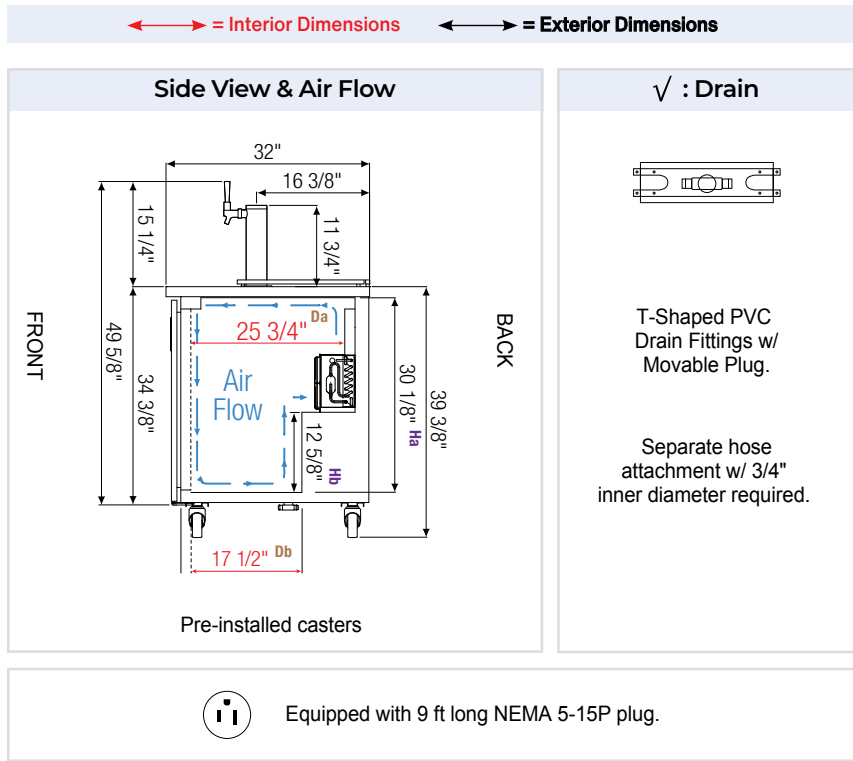

Model	Ref/ Frz/ Dual	# of Doors	Capacity [†] (Cu. Ft.)	# of 1/2 Barrels	HP	BTU/HR [†]	Refrigerant	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H ^a
ECF1	Ref	1	8	1	1/5	1,655	R290	115-60-1	2.5	177	23 1/2	32	39 3/8

[†] Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). Ref = Refrigerator

^a Height includes 5" for casters.
Da, Db Interior Depth Ha, Hb Interior Height

Specifications subject to change without notice.
Product dimensions are for general purposes and not absolute value. Product capacity (†) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.