

SIDE MOUNT SANDWICH PREP TABLES

Side Mounted Condensing Unit

EP - Series • EPR1 • EPR1-24 • EPR2 • EPR2-24 • EPWR2 • EPR3



▲ EPR1



▲ EPR1-24



▲ EPR2



▲ EPR2-24



▲ EPWR2



▲ EPR3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Open spaced interior with no walls between cabinet compartments.
- Vented stainless steel panel between top pan area and cabinet catches food debris.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.

Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for size and quantity).
- ½" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 12 ¼" deep cutting board is removable for ease of cleaning.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options


- NSF certified stainless steel double overshelf.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

← = Interior Dimensions ← = Exterior Dimensions

Air Flow




Front view of cabinet interior demonstrates air circulation from left to right.




Equipped with 9 ft long NEMA 5-15P plug.

Side View

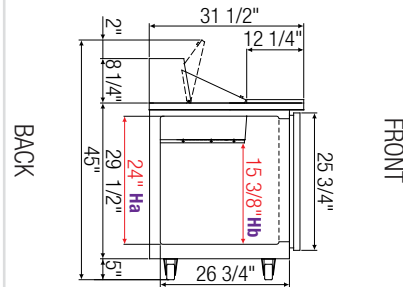


√ : Mounting space for standard aftermarket overshef.

Side View (EPR1-24 / EPR2-24 only)


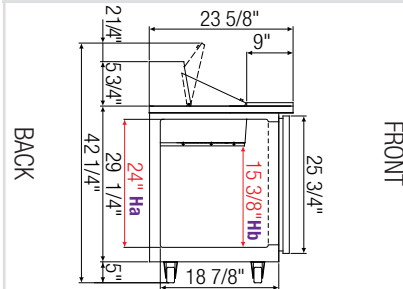


√ : Mounting space for standard aftermarket overshef.

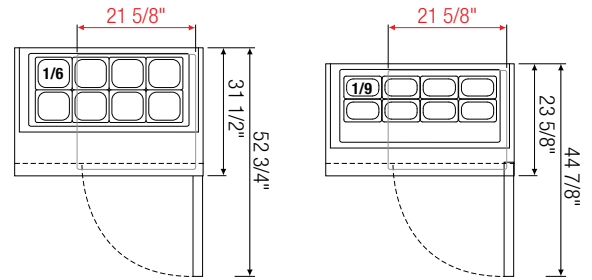


▲ EPR1


▲ EPR1-24

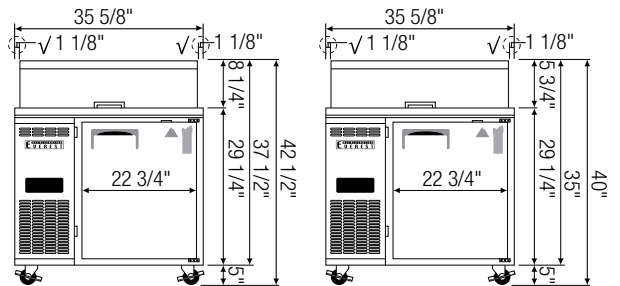


▲ EPR2







▲ EPR2-24



▲ EPWR2

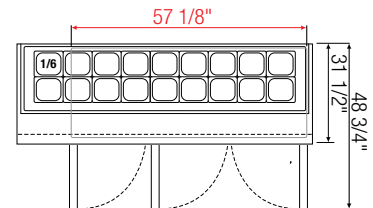

▲ EPR3

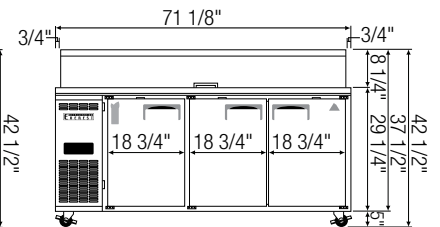

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
EPR1	Ref	1	9	1/4+	R290	2	1/6 x 8	115-60-1	3.27	268	35 5/8	31 1/2	37 1/2
EPR1-24	Ref	1	6	1/4+	R290	2	1/9 x 8	115-60-1	3.27	185	35 5/8	23 5/8	35
EPR2	Ref	2	13	1/4+	R290	4	1/6 x 12	115-60-1	3.48	326	47 1/2	31 1/2	37 1/2
EPR2-24	Ref	2	9	1/4+	R290	4	1/9 x 12	115-60-1	3.48	229	47 1/2	23 5/8	35
EPWR2	Ref	2	17	1/4+	R290	4	1/6 x 16	115-60-1	3.48	382	59 1/8	31 1/2	37 1/2
EPR3	Ref	3	21	1/3	R290	6	1/6 x 18	115-60-1	2.55	456	71 1/8	31 1/2	37 1/2

*: Height does not include 5" for casters.

Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▲) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Ref = Refrigerator



Please visit our website for updated Energy Efficiency information.