





EPBNR2-D4



EPBNWR2-D4



EPBNR3-D2

#### Cabinet Construction

- Heavy duty stainless steel interior/exterior with rounded corners for a hazard-free workspace.
- Open spaced interior with no walls between cabinet compartments.
- · Vented stainless steel panel between top pan area and cabinet catches food
- 16 gauge, high quality stainless steel worktop, lid and hood.
- · Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

# **Refrigeration System**

- Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Front air breathing for flexibility in installation.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct ensures optimal cold air circulation.
- Time-initiated and temperature-terminated auto defrost cycle for seamless
- · Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning.
- · Pressure relief devices rapid cabinet re-entry.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

#### **Doors & Drawers**

- Heavy duty stainless steel interior/exterior.
- 2.5" thick high density polyurethane insulation.
- · Frame heaters prevent exterior moisture build up.
- Thick gauge drawer frames with low-friction ball bearings.
- · Self-closing door (applies to model EPBNR3-D2).
- Snap-in magnetic gaskets for ease of cleaning.
- · High strength, recessed handles.

## **Preparation Area**

- NSF certified polycarbonate 6" deep pans (see table for quantity).
- 1/2" thick, foam insulated lid keeps top pan area cold and prevents moisture
- 12 1/4" deep cutting board is removable for ease of cleaning.

## **Shelving**


- · One epoxy coated, steel wire shelf (applies to EPBNR3-D2).
- · Drawer pans not included. See table for drawer pan capacity.

### **Temperature Control**


- · Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temp-set range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


### **Options**


- · NSF certified stainless steel double overshelf.
- · Additional shelving.
- 3" swivel casters with locks.
- 3.5"-6" height-adjustable and interchangeable legs.

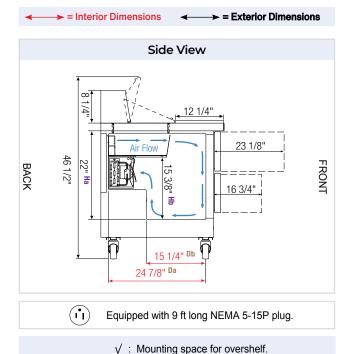



35 3/4" 1/6 31 1/2" 27 3/4" 35 3/4" 1 1/8"-√∰1 1/8" 8 8 8 3 8 3 34 3/8" 26 1/2 1/2" 1/2 EPBNR1-D2 EPBNSR2-D2






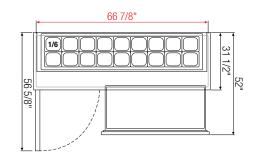





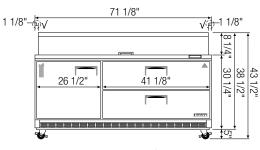

EPBNR2-D	4
----------	---

EPBNWR2-D4

EPBNR3-D2

Model	Ref/ Frz/ Dual	# of Doors	Capacity┡ (Cu. Ft.)	НР	Refrigerant	# of Shelves	# of <sup>†</sup> Pans (Drawer)	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exte	rior Dimensi (Inches) D <sup>b</sup>	ons H*
EPBNR1-D2	Ref	2(DR)	8	1/5	R290	N/A	1/2 x 4 1/4 x 2	115-60-1	2.5	251	27 3/4	31 1/2	38 1/2
EPBNSR2-D2	Ref	2(DR)	10	1/5	R290	N/A	1/2 x 4, 1/3 x 2 1/4 x 2, 1/6 x 1	115-60-1	2.5	299	35 5/8	31 1/2	38 1/2
EPBNR2-D4	Ref	4(DR)	13	1/4+	R290	N/A	1/2 x 4, 1/3 x 4 1/4 x 2, 1/6 x 2	115-60-1	3.5	368	47 1/2	31 1/2	38 1/2
EPBNWR2-D4	Ref	4(DR)	16	1/3	R290	N/A	1/2 x 4, 1/3 x 8 1/4 x 2, 1/6 x 4	115-60-1	2.5	436	59 1/8	31 1/2	38 1/2
EPBNR3-D2	Ref	1(D) 2(DR)	19	1/3	R290	1	1/2 x 2, 1/3 x 8 1/4 x 1, 1/6 x 4	115-60-1	3	473	71 1/8	31 1/2	38 1/2

Ref = Refrigerator | (DR) = Drawer | (D) = Door

- \* Height does not include 5" for casters.
- † Drawer pans are not included.
- b Depth includes 12 1/4" cutting board.

Da, Db Interior Depth Ha, Hb Interior Height