



EPPR1-D2



EPPR2-D2



EPPR2-D4



EPPR3-D2



EPPR3-D4

Cabinet Construction

- Heavy duty stainless steel interior/exterior with rounded corners for a hazard-free workspace.
- Open spaced interior with no walls between cabinet compartments.
- Vented stainless steel panel between top pan area and cabinet catches food debris.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- · Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set (six casters for models EPPR3-D2 and EPPR3-D4). Leg stabilizers standard for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct ensures optimal cold air circulation.
- Time-initiated and temperature-terminated auto defrost cycle for seamless
- · Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- · High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning.
- · Pressure relief devices allow rapid cabinet re-entry.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Doors & Drawers

- · Heavy duty stainless steel interior/exterior.
- 2.5" thick high density polyurethane insulation.
- · Frame heaters prevent exterior moisture build up.
- · Thick gauge drawer frames with low-friction ball bearings.
- Self-closing door (applies to EPPR3-D2 and EPPR3-D4).
- · Snap-in magnetic gaskets for ease of cleaning.
- · High strength, recessed handles.

Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for quantity).
- 1/2" thick, foam insulated lid keeps top pan area cold and prevents moisture
- 19 1/4" deep cutting board is removable for ease of cleaning.

Shelving


- Epoxy coated, steel wire shelves (applies to EPPR3-D2 and EPPR3-D4).
- Drawer pans not included. See table for drawer pan capacity.

Temperature Control

- · Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temp-set range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options


- · NSF certified stainless steel double overshelf.
- · Additional shelving.
- 3" swivel casters with locks.
- 3.5"-6" height-adjustable and interchangeable legs.

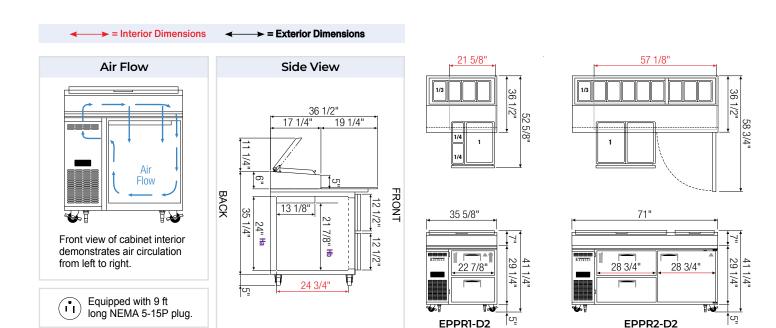



ABS Legs

Standard adjustable stainless steel clad ABS legs provide extra stability when opening and closing door.

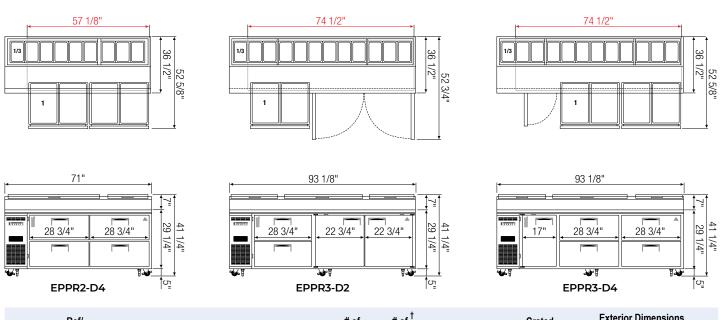

Model	Ref/ Frz/ Dual	# of Doors	Capacity┡ (Cu. Ft.)	НР	Refrigerant	# of Shelves	# of Pans (Top)	# of [†] Pans (Drawer)	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exte	rior Dimens (Inches) D ^a	ions H*
EPPR1-D2	Ref	2(DR)	9	1/3	R290	N/A	1/3 X 4	1 x 2 1/4 x 4	115-60-1	2.5	314	35 5/8	36 1/2	36 1/4
EPPR2-D2	Ref	1(D) 2(DR)	23	1/3	R290	2	1/3 X 9	1 x 4	115-60-1	2.5	492	71	36 1/2	36 1/4
EPPR2-D4	Ref	4(DR)	23	1/3	R290	N/A	1/3 X 9	1 x 8	115-60-1	2.5	494	71	36 1/2	36 1/4
EPPR3-D2	Ref	2(D) 2(DR)	30	1/3	R290	4	1/3 X 12	1 x 4	115-60-1	2.5	665	93 1/8	36 1/2	36 1/4
EPPR3-D4	Ref	1(D) 4(DR)	30	1/3	R290	2	1/3 X 12	1 x 8	115-60-2	2.5	665	93 1/8	36 1/2	36 1/4

 \bigstar Height does not include 5" for casters; height includes top lid and handle.

- a Depth includes 19 1/4" cutting board.
- † Drawer pans are not included.

Ha, Hb Interior Height

Specifications subject to change without notice.

Ref = Refrigerator | (DR) = Drawer | (D) = Door