

# COUNTERTOP REFRIGERATED DISPLAY CASE SELF-CONTAINED CONDENSING UNIT



ESC71L

ESC Series



### Refrigeration System

- Left mounted self-contained condensing unit uses environmentally friendly, EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP).
- Rear condenser airflow intake and side louver exhaust promote efficient ventilation.
- Top to bottom evaporator tubes provide balanced cooling. Triple-looped and nickel plated copper tubing. Bottom coil is located under the interior flooring.
- Corrosion-resistant condenser coil.
- Electronically commuted (ECM) condenser fan motor achieve rapid cooling with less energy consumption.
- Removable and washable condenser coil air filter.
- Exterior on/off power switch.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

### Cabinet Construction

- Wide single piece, curved glass display window.
- Open spaced interior with no walls between compartments.
- Heavy duty, ABS plastic exterior casing.
- Black coated steel housing for condensing unit.
- Stainless steel floor interior has rounded corners and two drain holes for ease of cleaning.
- High density, foamed-in-place insulation.

### Doors

- 6 3/4" high removable sliding glass doors for storage accessibility and ease of cleaning.

### Trays

- Durable plastic trays have two mounting styles which offer medium to low temperature coverage.

### Temperature Control

- Factory preset temperature of 38°F at an ambient temperature of 80°F. (no controls equipped)
- NSF certified thermometer.



| Type | Doors | Capacity<br>Cu. Ft. | Compressor<br>Mount | Shelves | Refrigerant | HP  | Power<br>V-Hz-Ph | Amps | Crated<br>Weight | Exterior Dimensions |     |         |
|------|-------|---------------------|---------------------|---------|-------------|-----|------------------|------|------------------|---------------------|-----|---------|
|      |       |                     |                     |         |             |     |                  |      |                  | L                   | D   | H*      |
| REF  | 4     | 2.5                 | -                   | -       | R-290       | 1/8 | 115-60-1         | 1.5  | 130 lbs          | 71"                 | 14" | 11.125" |

(†)Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). (P) Product capacity is calculated based on standard industry figures. (\*) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

# COUNTERTOP REFRIGERATED DISPLAY CASE SELF-CONTAINED CONDENSING UNIT



## ESC71L

## ESC Series

### DIMENSIONAL DATA

|                    |    |            |
|--------------------|----|------------|
| External Dims.     | L  | 71 in.     |
|                    | D  | 14 in.     |
|                    | H* | 11.125 in. |
| Crated Weight      |    | 130 lbs.   |
| Doors/Drawers/Lids |    | 4          |
| Max Weight Support |    | -          |

### STORAGE DATA

|                                   |     |
|-----------------------------------|-----|
| Net Capacity Cu. Ft. <sup>†</sup> | 2.5 |
| Shelves                           | -   |
| Barrels                           | -   |
| 20 oz. Bottles                    | -   |
| 12 oz. Bottles                    | -   |
| 12 oz. Cans                       | -   |
| 8" Mugs                           | -   |
| # of Pans (Top)                   | -   |
| # of Pans (Drawer)                | -   |
| Dividers                          | -   |
| Trays                             | 5   |

### ELECTRICAL DATA

|                      |  |
|----------------------|--|
| Voltage              | 115-60-1   |
| Full Load Amperage   | 1.5A   |
| Feed Wires w/ Ground | 3  |
| Cord Length          | 9ft  |
| NEMA Plug Type       |  NEMA 5-15P |

### REFRIGERATION DATA


|                     |       |
|---------------------|-------|
| Compressor          | Left  |
| Refrigerant         | R-290 |
| Compressor HP       | 1/8   |
| BTU/HR <sup>†</sup> | 1211  |

### KEY

|           |            |             |               |
|-----------|------------|-------------|---------------|
| <b>D</b>  | Door       | <b>R</b>    | Refrigerator  |
| <b>L</b>  | Lid        | <b>REF</b>  | Refrigerator  |
| <b>H</b>  | Half Door  | <b>F</b>    | Freezer       |
| <b>FD</b> | Full Door  | <b>FRZ</b>  | Freezer       |
| <b>SD</b> | Solid Door | <b>DUAL</b> | REF/FRZ Combo |
| <b>GD</b> | Glass Door | <b>DR</b>   | Drawer        |


|  |           |       |      |    |      |
|--|-----------|-------|------|----|------|
|  | Elevation | Right | Plan | 3D | Back |
|  |           |       |      |    |      |

### PLAN VIEW

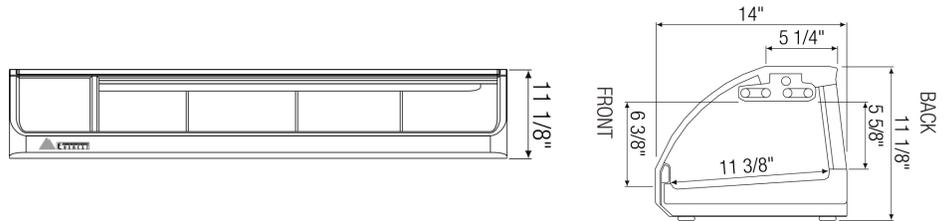

FRONT

SIDE

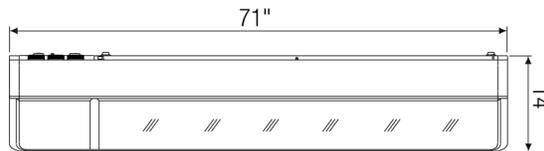

TOP

### ACCESSORIES & OPTIONS

(<sup>†</sup>)Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). (<sup>‡</sup>) Product capacity is calculated based on standard industry figures. (<sup>\*</sup>) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.