

2019

CATALOG

A Step Above the Standard



REFRIGERATION
EVEREST



As a global forerunner in refrigeration technology, Everest Refrigeration's mission is to exceed the standards of the commercial foodservice industry through products and services that reflect our core ideals of bold innovation, reliable workmanship and solid integrity.

For over 50 years, our robust line of high performance, energy efficient commercial refrigeration products have progressively expanded and diversified to meet the growing demands of the domestic and international markets. Our brand and production methods continue to evolve as we gain expertise and advancement through focused research and development. Each merchandise undergoes stringent quality control measures performed by highly trained professionals to ensure complete product satisfaction.

We stand behind our product with the best warranty program that the industry has to offer. This guarantee extends to our broad array of services with an earnest, nationwide team of factory-trained technical specialists, inventory and logistics associates, as well as sales and account executives ready to provide pre-sale and post-sale support.

Everest's commitment to front line technology is rivaled only by our dedication to the people who use them. We don't just build machines, we create solutions. More than tools, our products are fundamental elements and enhance the everyday lives of our customers. This is what it means to go above the standard. We are glad to have you with us in this continuing pursuit.

A stylized, handwritten signature in black ink, appearing to read 'Yong Lee', is positioned above the name and title.

Yong Lee
President

Table of Contents

6 - 7	Everest History
8	About Everest
9	Production Facilities
10	Reasons for Choosing Everest
11	Sales & Distribution Network
12 - 17	Blizzard R290 Condensing Unit

UPRIGHT REACH-INS

18 - 19.....Top Mounted Condensing Unit

20 - 21	Upright Reach-In Refrigerators
22 - 23	Upright Reach-In Freezers
24 - 25	Upright Reach-In Dual Temps
26 - 27	Door & Drawer Combo Upright Reach-Ins
28 - 29	Upright Reach-In Glass Door Refrigerators
30 - 31	Glass & Solid Combination Half-Door Upright Reach-In Refrigerators

32 - 33.....Bottom Mounted Condensing Unit

34 - 35	Bottom Mount Reach-In Refrigerators
36 - 37	Bottom Mount Reach-In Freezers
38 - 39	Bottom Mount Reach-In Dual Temps
40 - 41	Bottom Mount Reach-In Glass Door Refrigerators
42 - 43	Dry Ager & Thawing Refrigerators
44 - 45	Standard Features & Benefits

46 - 47.....GLASS DOOR MERCHANDISERS

Bottom Mounted Condensing Unit

48 - 49	Glass Door Merchandiser Refrigerators - Single Swing Door
50 - 51	Glass Door Merchandiser Refrigerators - Multiple Swing Doors
52 - 53	Glass Door Merchandiser Refrigerators - Sliding Doors
54 - 55	Glass Door Merchandiser Refrigerators Stainless Steel - Sliding Doors
56 - 57	Glass Door Merchandiser Freezers - Swing Doors

58 - 59.....CHROMATOGRAPHY REFRIGERATORS

Bottom Mounted Condensing Unit

60 - 61	Chromatography Refrigerators - Swing Doors
62 - 63	Chromatography Refrigerators - Sliding Doors
64 - 65	Standard Features & Benefits

UNDERCOUNTERS

66 - 67.....Back Mounted Condensing Unit

68 - 69	Back Mount Undercounter Refrigerators
70 - 71	Drawered Undercounter Refrigerators
72 - 73	Back Mount Undercounter Freezers

74 - 75.....Side Mounted Condensing Unit

76 - 77.....Side Mount Undercounter Refrigerators

78 - 79.....Side Mount Undercounter Freezers

80 - 81.....Side Mount Undercounter Dual Temps

82 - 83.....Side Mount Glass Door Undercounter Refrigerators

CHEF BASES

84 - 85.....Side Mounted Condensing Unit

86 - 87.....Chef Bases - Two Drawer

88 - 89.....Chef Bases - Four Drawer

90 - 91.....Standard Features & Benefits

FOOD PREP. TABLES

92 - 93.....Back Mounted Condensing Unit

94 - 95.....Back Mount Sandwich Prep. Tables

96 - 97.....Drawered Sandwich Prep. Tables

98 - 99.....Back Mount Mega-Top Sandwich Prep. Tables

100 - 101.....Open Top Prep. Tables

102 - 103.....Side Mounted Condensing Unit

104 - 105.....Side Mount Sandwich Prep. Tables

106 - 107.....Pizza Prep. Tables

108 - 109.....Drawered Pizza Prep. Tables

110 - 111.....BAR EQUIPMENT

112 - 113.....Back Bar Coolers

114 - 115.....24" Deep Back Bar Coolers

116 - 117.....Glass Door Back Bar Coolers

118 - 119.....24" Deep Glass Door Back Bar Coolers

120 - 121.....24" Deep Sliding Glass Door Back Bar Coolers

122 - 123.....Direct Draw Keg Refrigerators

124 - 125.....24" Deep Direct Draw Keg Refrigerators

126 - 127.....Back Bar & Direct Draw Keg Refrigerators

128 - 129.....24" Deep Back Bar & Direct Draw Keg Refrigerators

130 - 131.....24" Deep Glass Door Back Bar & Direct Draw Keg Refrigerators

132 - 133.....Club Top Direct Draw Keg Refrigerators

134 - 135.....Horizontal Bottle Coolers

136 - 137.....Solid Slide Lid Glass & Plate Chillers

138 - 139.....Nitro Cold Brew Coffee Dispenser

140 - 141.....Standard Features & Benefits

COUNTERTOP REFRIGERATED DISPLAY CASE

142 - 143.....Self - Contained Condensing Unit

144 - 145.....Countertop Refrigerated Display Cases

146 - 147.....Standard Features & Benefits

148.....Full Product Line

149.....Warranty

Everest History

A Step Above the Standard, A Step Towards the Future

For over five decades, Everest Refrigeration's line of food service equipment continues to raise the bar in dependability, functionality and innovative design. With smart engineering packaged in a modern, user-friendly design, Everest pushes the boundaries of the foodservice industry, taking you one step above the standard and one more step closer to the future.

APR 1965

Asia Refrigeration Parts Supply Company is established in Seoul, South Korea.

DEC 1992

Moves to expansive factory space in Incheon, Namdong's industrial complex



NOV 1984

The company is renamed to BuSung Co. Ltd.

FEB 1985

Joins Korea Refrigeration and Airconditioning Association (KRAIA)

MAR 1994

Receives recognition as a quality guaranteed company by the Korea Electric & Electric Testing Institute

MAY 1994

Expands with a second factory in South Korea

JUN 1993

Registers as a Class A international trading company (AFTAK)

JUL 1998

Obtains ISO-9001 as certified by Korea Quality Certificates Association



FEB 1997

Expands with a third factory in South Korea



MAY 2002

BuSung America Corporation DBA Everest Refrigeration is established in Carson, California



MAY 2002

Introduced the first line of Uprights, Undercounters, Prep Tables and Merchandisers



APR 2002

Obtains license for environmental electric wavelength (ESAK2106001)

JUL 2002

Obtains KESA2106002 certification with the Korean Institute of Electromagnetic Engineering & Science (KESA)

NOV 2002

Obtains NSF Certification



AUG 1999

Obtains ETL Certification



START



MAY 2012
Everest Refrigeration celebrates 10 Years of Excellence

SEP 2014
Adds the 24" Deep Bar Equipment Line



JAN 2018
Develops Blizzard R290 Self Contained Condensing Unit



JUL 2012
Opens a branch office and warehouse in Houston, TX



AUG 2014
Opens a branch office and warehouse in Norcross, GA



NOV 2018
Introduces the Dry Ager and Meat Thawing Refrigerator line.



JUN 2008
Publication of Autoquotes



JUL 2008
Introduces the Chefbase line with innovative anti-warp features



JUL 2008
Introduces the Bar Equipment line



JAN 2012
Introduces the Bottom Mount Upright line.



APR 2016
NJ Branch expands with a new 16,130 square foot warehouse in Lyndhurst, NJ



JAN 2015
Joins the prestigious SEFA Buying Group



JAN 2019
Joins KCL CAD & Revit Catalog



APR 2013
Opens a branch office and warehouse in Doral, FL



AUG 2015
TX Branch expands with a new 39,445 square foot warehouse in Irving, TX



JAN 2019
Expands the service network to 1,700 authorized service companies across the United States.

AUG 2009
Introduces the Sushi Case line



MAR 2011
Opens a branch office and warehouse in Edison, NJ

JUL 2011
Opens a branch office and warehouse in Dallas, TX

NOV 2011
Adds the Merchandiser Freezer line



JAN 2010
Corporate office moves to a larger facility in Compton, California



JAN 2015
Opens a branch office and warehouse in Bensenville, IL



NOV 2015
BuSung Co. Ltd. celebrates 50 Years of Continued Success



About Everest

The history of Everest Refrigeration dates back to 1965 when its parent company, BuSung Refrigeration & Heating Co. Ltd., was founded by Mr. Bowoong Lee at the age of 23. In the years following the Korean War, he started Asia Refrigeration Parts Supply Co., refurbishing, manufacturing and importing US and Japan made HVAC compressors, heat exchange units, safety components and various assembly parts to manufacturing plants in South Korea.

In 1984, the business was renamed to “BuSung Co., Ltd.”, having grown to a substantial manufacturing and distribution entity with 23 dealers secured in the South Korean market. Under the solid leadership of the Lee family, the company launched high-performance commercial foodservice and HVAC equipment with cutting-edge technology that was meticulously developed and created inhouse. The year 1989 saw the internationalization and development of the company’s brand and product line and its trade and production network. Rapid development called for the expansion to three manufacturing plants, the addition of 450 employees and the advancement to fully automated assembly lines which all took place between 1992 and 2000.

The company continued the path of internationalization with the establishment of Everest Refrigeration in Los Angeles, California in May 2002. This period was the first pivotal step of introducing the trusted commercial equipment lines of uprights, undercounters, prep tables and merchandisers to the US food service industry. Strong public reception opened the way to the eventual debut of chef bases, bar equipment and sushi cases in 2008. Over the last 15 years, additional lines were added in various forms and functions to suit any application.

The success of Everest in the US market allowed for the unprecedented expansion of the sales and distribution territories. From the US corporate office based in Los Angeles, California, more branch offices and warehouses were opened in New York, Texas, Florida, Georgia and Illinois by 2015. With 7 facilities collectively capable of processing more than 100,000 units per shift, Everest has access to versatile storage and distribution solutions that improve product availability, reduce the risks involved with merchandise transfer and boost the overall accuracy of order fulfillment.

For many years, Everest has carefully developed the production of innovative and dependable technology which offer concrete solutions to keep a business running smoothly and to create comfortable work environments through energy-efficient systems. Alongside technical proficiency is a commitment to quality service. Behind the scenes and across all regions, is an army of dedicated professionals who work tirelessly for the same goal – 100% customer satisfaction. Everest continues its promise to break new ground and to go beyond the boundaries of the foodservice industry.

Production Facilities INCHEON, SOUTH KOREA



Factory 1



Factory 2

Fully Automated Manufacturing Process

Material Preparation Lines Metal sheets undergo precision shearing, punching, laser cutting and bending



Pre-Assembly Lines Cabinets and doors undergo construction, molding and foam injection



Final Assembly Lines Assembly and installation of internal refrigeration and electrical systems



Quality Assurance Lines System integrity and performance test, final inspection and packaging



Reasons for Choosing Everest

Quality

Everest prides itself in being a step above the industry standard. Top grade materials and components, highly skilled engineers, state of the art assembly lines and stringent quality measures all come together to create foodservice equipment that can withstand the most intense application.

Dependable Technology

Everest runs on reliable technology designed for safety and ease. The New Blizzard R290 Condensing Unit was engineered with our values of safety, speed, and convenience at its core. An industry first, the Blizzard R290 is a patent pending, fully detachable self-contained refrigeration system. Braze-less repairs and easy replacement shorten downtime and eliminate the risk of R290 ignition. Auto-reverse condenser fan motors help keep the condenser coil clean. Applicable to most Everest Refrigeration products.

Excellent Warranty

Everest offers the best warranty in the industry. All equipment are backed with a solid 3-year parts and labor warranty and a 5-year compressor warranty. An expansive service network of factory trained service representatives and over 1,700 Everest authorized service companies nationwide are ready to provide immediate technical assistance

Availability

Inventory fill rate is a primary focus of Everest's operations. The success of replenishment orders and factory and shipping schedules is achieved through precise inventory management and strategic asset movement and storage. Our expansive list of warehouses nationwide ensures local availability and support.


Competitive Pricing

Everest offers high quality products at affordable, competitive prices – an accomplishment made possible in the current market through careful planning. Direct control and strategizing of factory assets and operations give us the room to manage profits. Order discounts, shipping perks and premiums, rebate programs and flexibility in terms are just some of the incentives Everest has on offer.

Outstanding Customer Service

Behind Everest's success is our dedicated team of in-house, factory-trained sales, financial, shipping, service and parts executives ready to support customers every step of the way, from pre-sale to post-sale proceedings. Providing a solid customer service experience is our priority.

Sales & Distribution Network

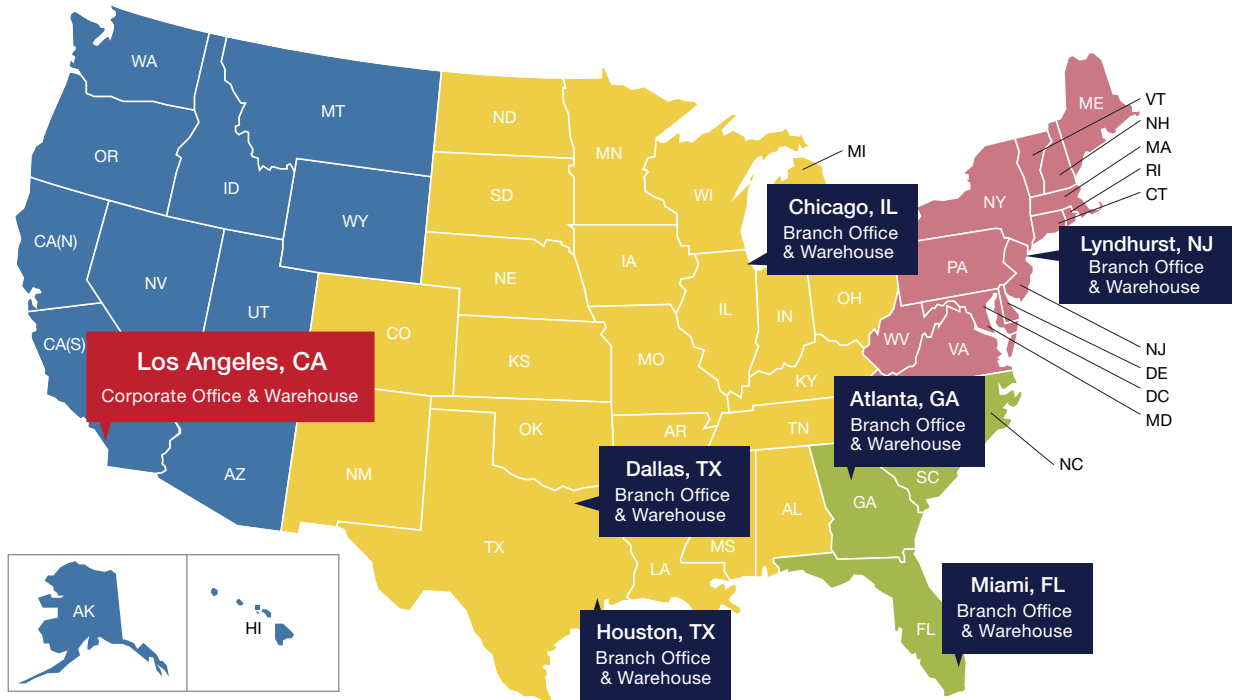

LOS ANGELES, CA

Address 201 W. Artesia Blvd.
Compton, CA 90220

Phone 310. 323. 6586

Fax 310. 323. 7524 | 310. 761. 1127

Email sales.west@EVERESTref.com
po.ca@EVERESTref.com



MOST DELIVERIES WITHIN 2 TO 3 DAYS!!!

LYNDHURST, NJ

Address 1270 Valley Brook Ave., Ste. 100C
Lyndhurst, NJ 07071

Phone 201. 302. 0217

Fax 201. 302. 0218

Email sales.east@EVERESTref.com
po.nj@EVERESTref.com

CHICAGO, IL

Address 2475 W. Touhy Ave.
Elk Grove Village, IL 60007

Phone 310. 323. 6586

Fax 310. 323. 7524

Email sales.central@EVERESTref.com
po.central@EVERESTref.com

DALLAS, TX

Address 1950 Hurd Dr.
Irving, TX 75038

Phone 214. 792. 9133

Fax 469. 458. 6326

Email sales.central@EVERESTref.com
po.tx@EVERESTref.com

ATLANTA, GA

Address 1325 Oakbrook Dr.
Norcross, GA 30093

Phone 786. 409. 3540

Fax 786. 409. 3735

Email sales.east@EVERESTref.com
po.fl@EVERESTref.com

HOUSTON, TX

Address 1217 N. Post Oak Rd.
Houston, TX 77055

Phone 214. 792. 9133

Fax 469. 458. 6326

Email sales.central@EVERESTref.com
po.tx@EVERESTref.com

MIAMI, FL

Address 221 W. Hallandale Beach Blvd., #207
Hallandale, FL 33009


Phone 786. 409. 3540

Fax 786. 409. 3735

Email sales.east@EVERESTref.com
po.fl@EVERESTref.com

Blizzard R290

Blizzard R290 Is the latest innovation in refrigeration technology. Patented by Everest. This all-in-one eco-friendly and easy to install condensing unit will surely blow away the competition.

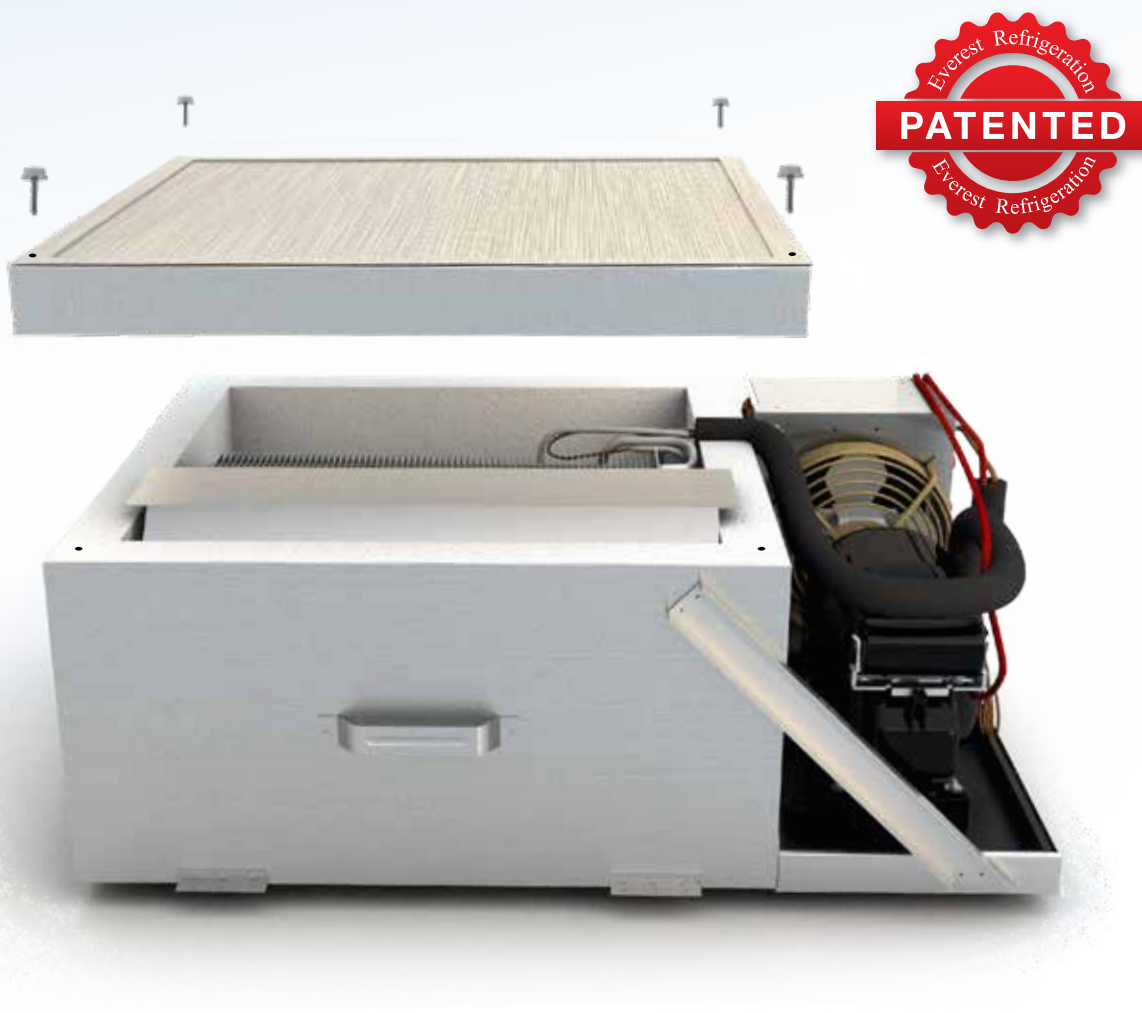

The Blizzard uses R290, a natural, climate friendly, hydrocarbon refrigerant with zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP). It's an effective alternative to hydrofluorocarbon (HFC) based refrigerants. Without harmful effects to the environment. Blizzard and all Everest equipment meet the daily energy consumption standards of the U.S. Department of Energy & Environment Protection Agency.




U.S. DEPARTMENT OF
ENERGY




Blizzard R290

Self Contained Condensing Unit Setup.


Top / Bottom Mounted Condensing Unit

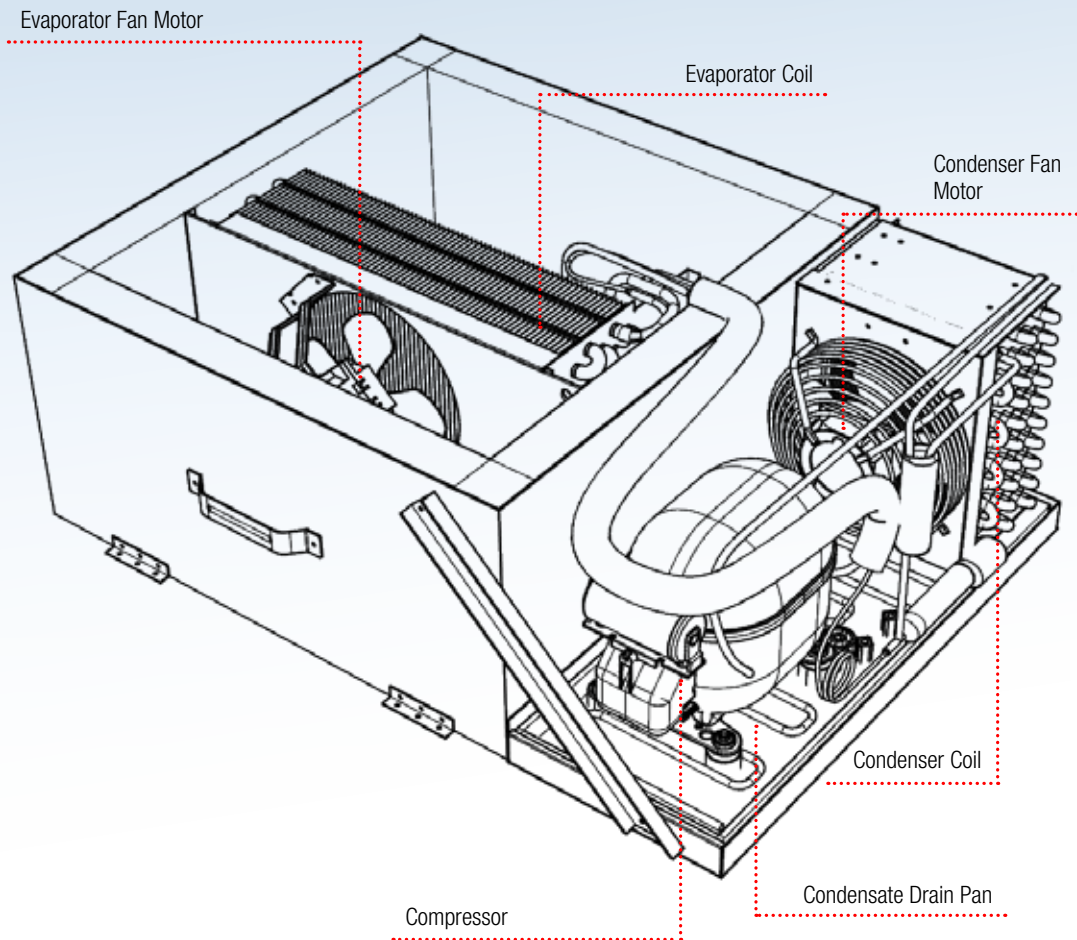

Back Mounted Condensing Unit

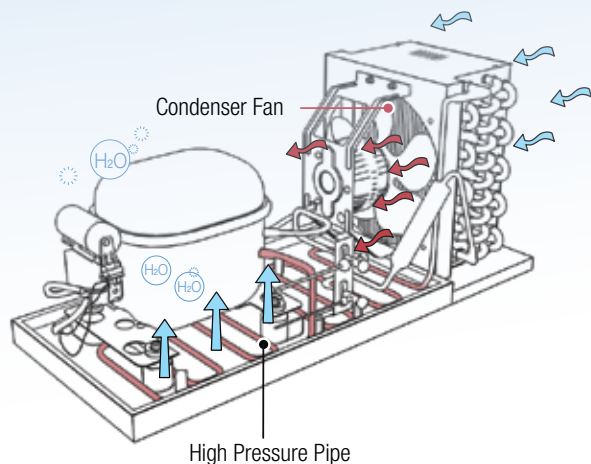


Side Mounted Condensing Unit

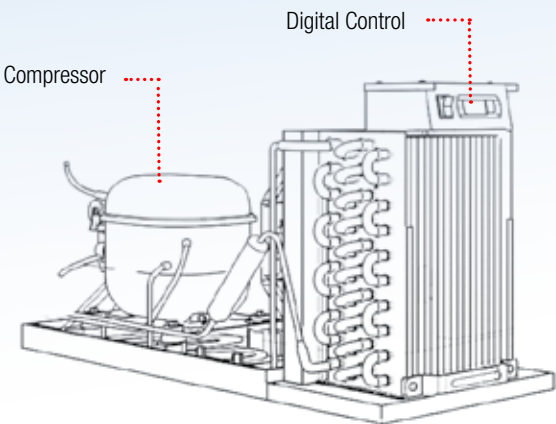

Compressor

Unconfined to ensure uninterrupted cooling and prolonged life.


Optimized HP rating for energy efficiency.

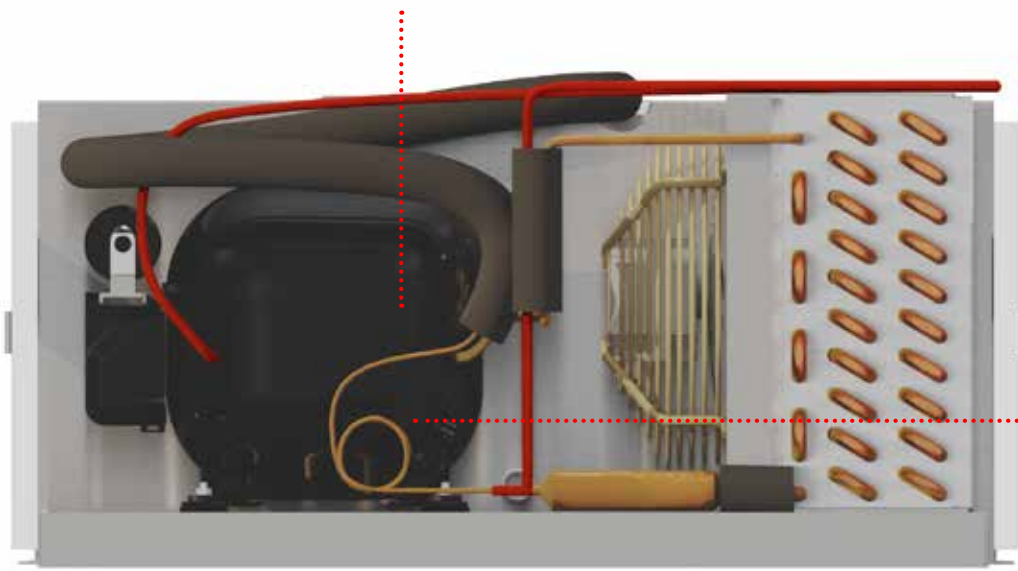


High performance for rapid cooling.

Condenser Coil

Overheat protection sensor measures condenser coil temperature.

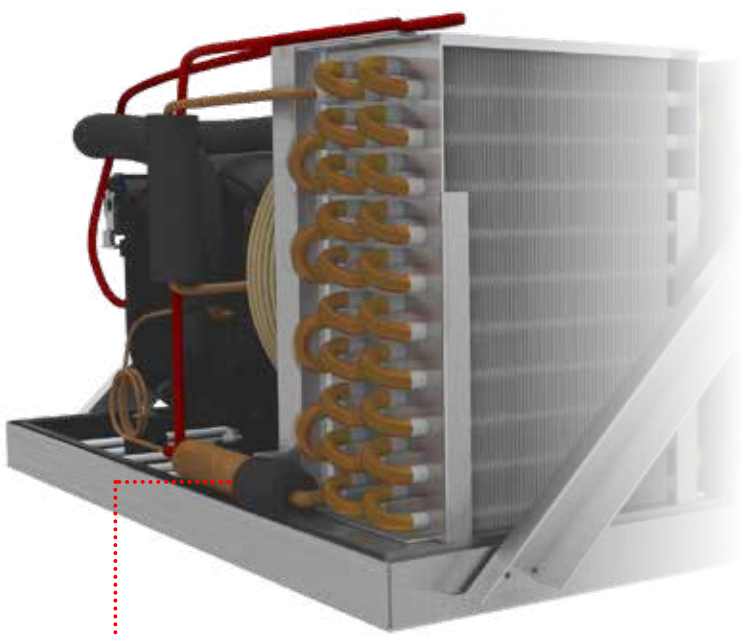

Overheat Protection Sensor. →




Alerts users to high ambient temperature conditions or a clogged condenser coil. This not only prolongs compressor life but serves as a fire safety feature.

Condenser Fan Motor

Energy saving EC motor performs multiple functions simultaneously.


- Auto fan rotation blows out dust and debris from condenser coil periodically.
- Vents heat from condenser coil.
- Cools off compressor.
- Synergizes with hot gas coil in accelerating the evaporation of surplus moisture that collects in the condensate drain pan (Air Movement System).
- Large fan blade with high RPM rating vents out heat faster.

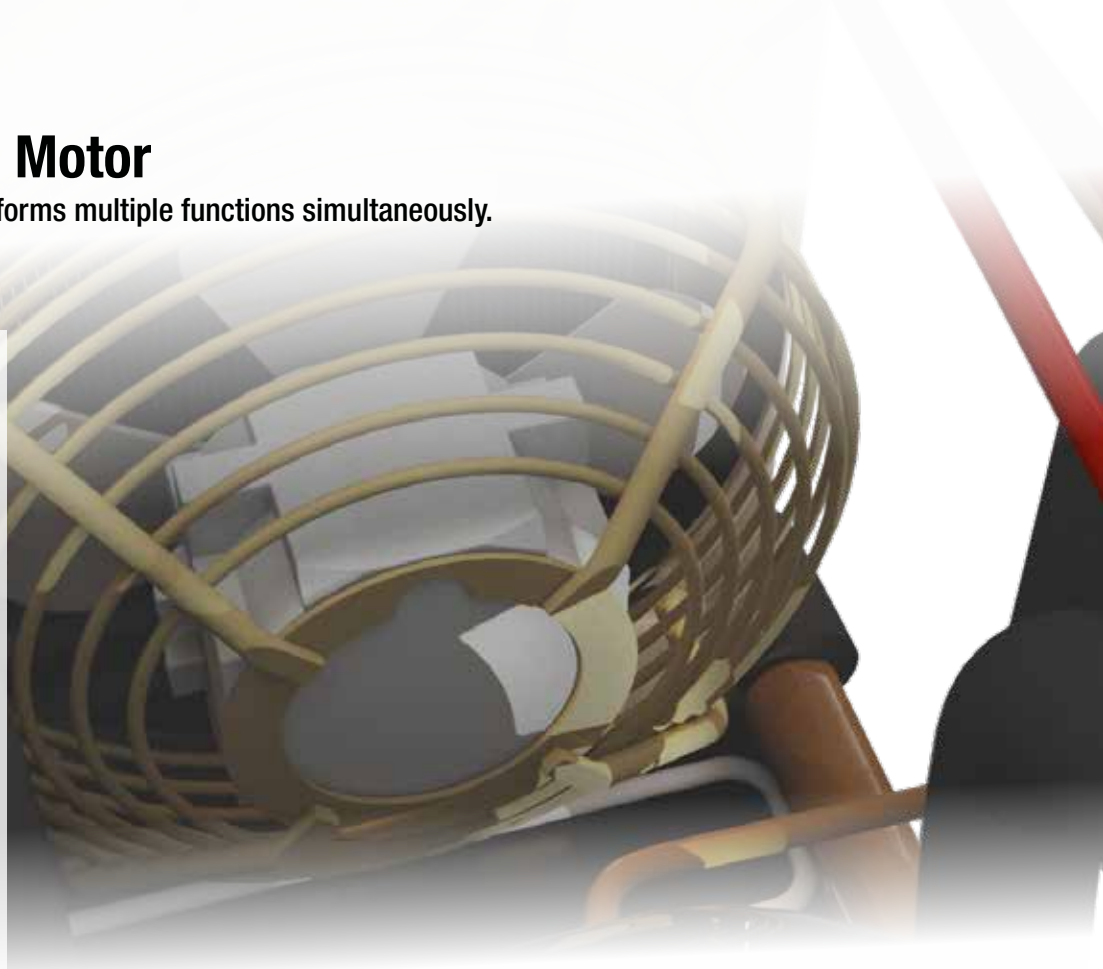

Condensate Drain Pan

Hot Gas Coil Evaporates surplus moisture from the condensate drain pan.


Condenser fan motor
creates air movement.

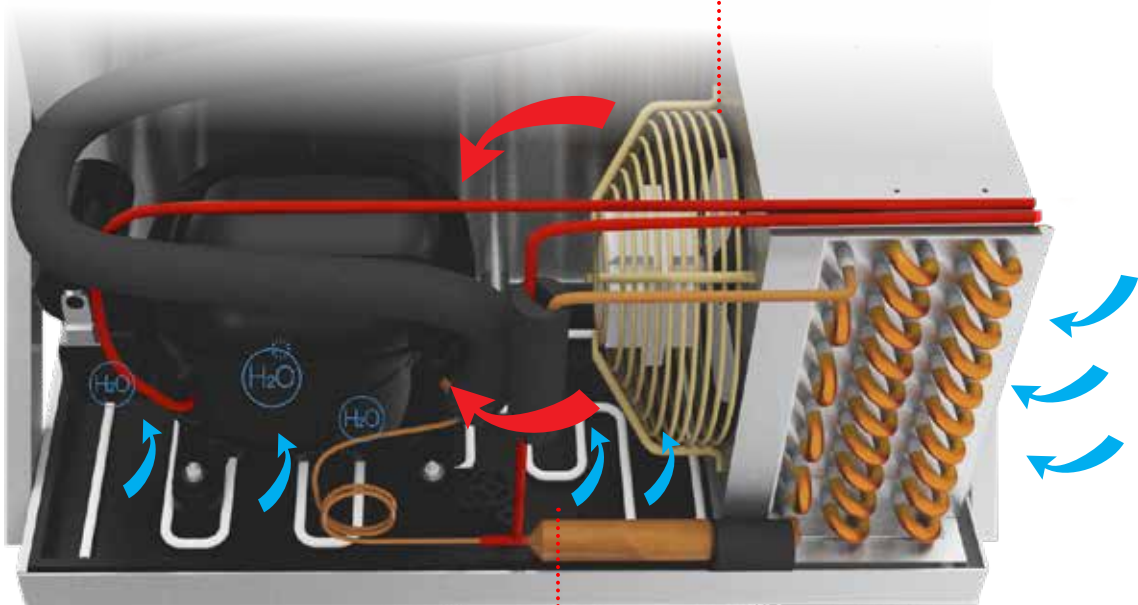

Hot gas coil produces
thermal evaporation.


Evaporator Coil

Oversized Evaporator Coil for the faster cold dispersion.

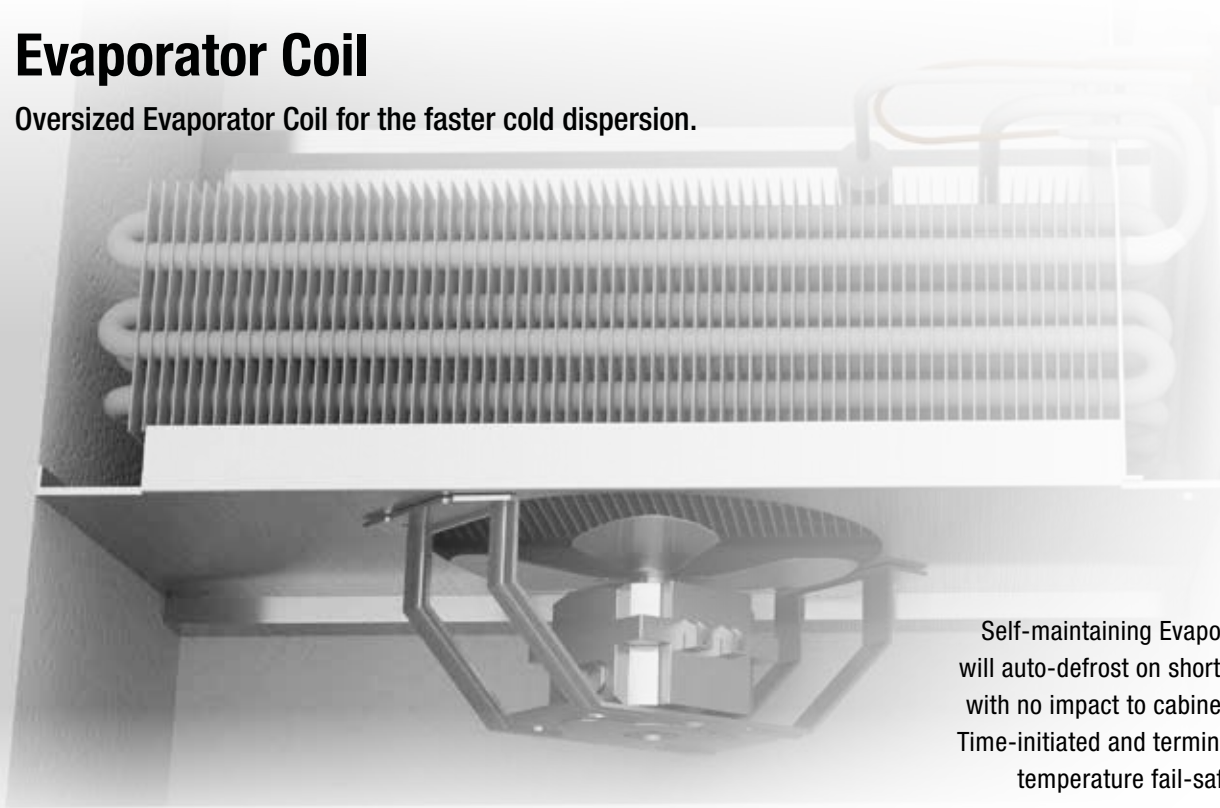

Self-maintaining Evaporator Coil will auto-defrost on short intervals with no impact to cabinet cooling. Time-initiated and terminated with temperature fail-safe sensor.

Evaporator Fan Motor & Air Duct

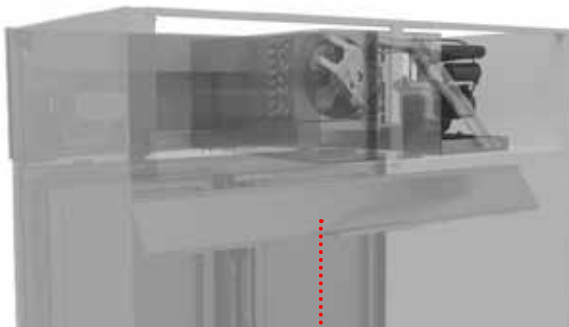

Cool Air Duct

Provides even distribution of cooled air to the cabinet interior.

Evaporator Fan Motor

Energy saving EC (Electronically Commutated) motor.




No Onsite Brazing Policy

Everest eliminates the risk of fire or explosion.



If Blizzard R290 requires any brazing, Everest will send a replacement.*
No guesswork on leak detection means faster service completion.

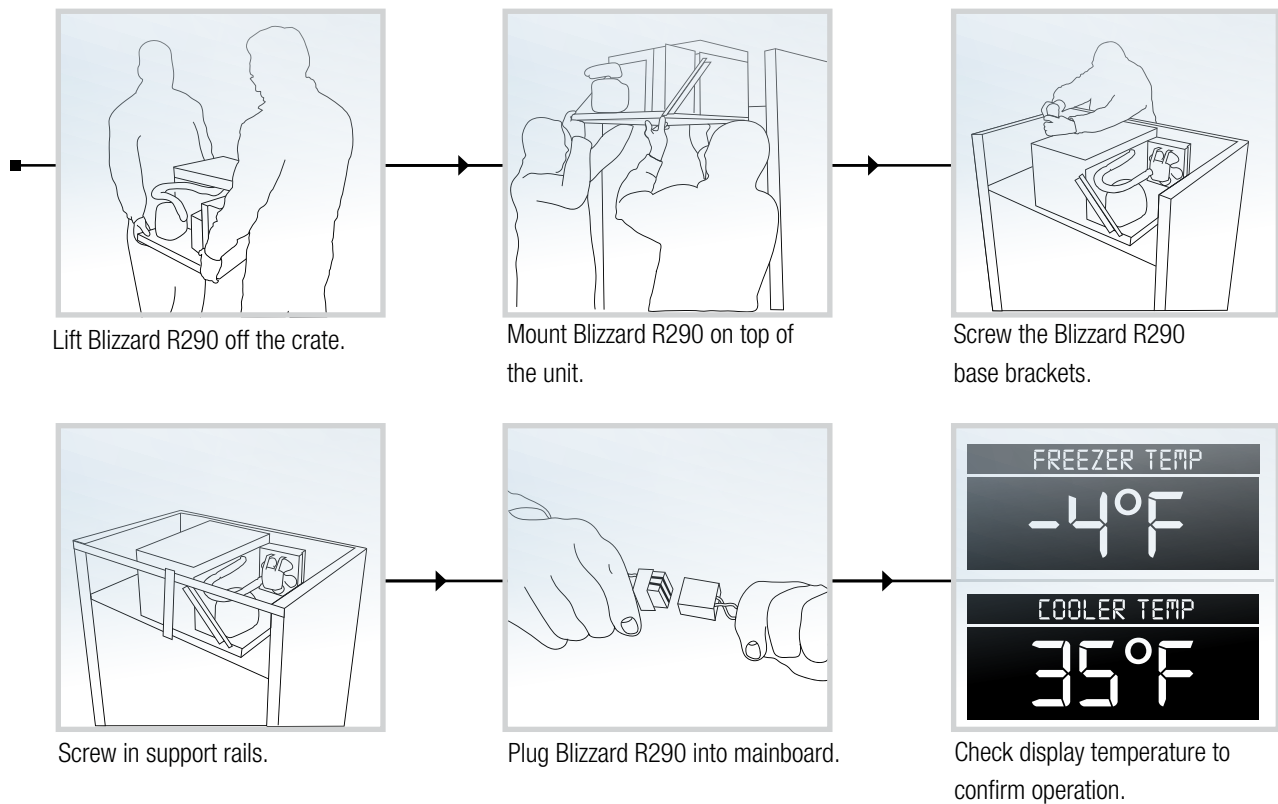

*Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Upright Reach-Ins

Top Mounted Condensing Unit - *ES Series*

Reference Model: ESR2

Everest's Upright Top Mounted Reach-In series offers an outstanding combination of refrigerator, freezer and dual temperature options as well as full or half door and drawer variations for multiple applications. The line is geared for sustainability and energy efficiency with features designed to reduce compressor run time and the reliance on electricity.



Exterior



Interior

1: Digital Control

Multi-function with easy to read LED display.



2: Field Reversible Doors*

Detachable for on the spot field reversal.

3: Pre-Installed Door Locks

Provides security options for any situation.

4: Recessed Door Handle


Heavy duty with high traction surface.

5: Heavy Duty Swivel Casters

Standard 5" with locks on front set. Optional 3" swivel caster or height-adjustable leg replacements also available.

Leg Stabilizers*

Adjustable stainless steel clad ABS leg provides extra stability when opening doors.



Blizzard R290 Condensing Unit*

Top mounted, self-contained, fully detachable and uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

Audible Overheat Protection Alarm*

Keeps compressor and condenser coil from overheating.

Self-Maintaining Condensate Pan


Energy efficient and requires no external drains or electric heaters.

ECM Evaporator Fan Motor*

Electronically Commutated. Achieves rapid cooling with less energy.

ECM Condenser Fan Motor*

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

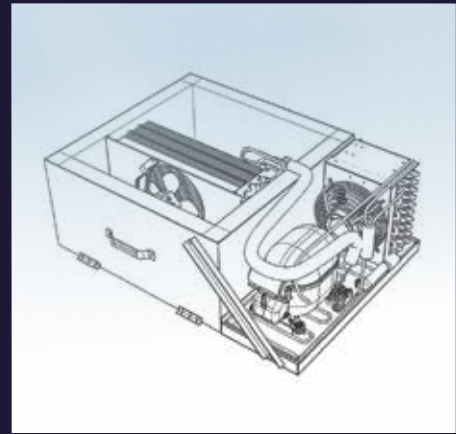

Upright Reach-Ins
(Top Mount)

6: Full Length Air Duct*

Ensures optimal distribution of cold air.

7: Shatter-Proof LED Lighting*

Silicone coated and energy efficient. Provides bright, high color illumination with low heat output.

8: Air Circulation Guard

Guarantees unrestricted airflow in cabinet interior.

9: Vacuum Relief Valve

Automatically equalizes cabinet pressure for smooth access to cabinet interior when re-opening doors.

10: Ridge-Lined Door Gaskets

Keeps air tight seal and promotes smooth cabinet re-entry. Snap-in for easy cleaning and replacement.

11: Stainless Steel Interior & Exterior



High quality with rounded corners for a hazard-free workspace.

12: Air Tight Seal

Self-closing door with adjustable torsion system ensures a positive seal.

13: Thick Insulation

2.5" thick high density polyurethane insulation ensures temperature stability and conserves energy.



* Applies to select models.

UPRIGHT REACH-IN REFRIGERATORS

Top Mounted Condensing Unit

ES - Series • ESR1 • ESRH2 • ESR2 • ESRH4 • ESWR2 • ESR3



Upright Reach-Ins
(Top Mount)



▲ ESR1



▲ ESRH2



▲ ESR2



▲ ESRH4



▲ ESWR2



▲ ESR3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set. Leg stabilizers standard for models ESR1, ESRH2 and ESR3.

Refrigeration System

- Top mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system and airflow guard ensure optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.
- Field reversible (does not apply to model ESRH4).

Shelving

- Three epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (does not apply to model ESRH4).



Dimensions

ABS Legs





Two additional front adjustable stainless steel clad ABS legs for model ESR1 and ESRH2 to provide extra stability when opening and closing doors, and one additional leg for ESR3 for weight support.




Equipped with 9 ft long NEMA 5-15P plug.


Side View

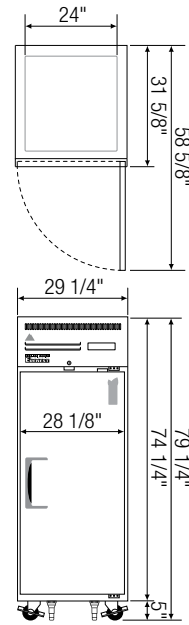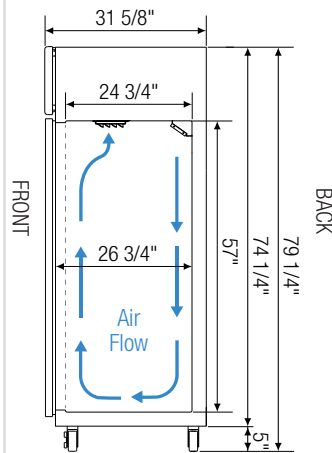


▲ ESR1

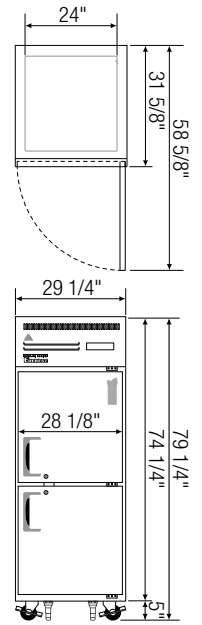


▲ ESRH2

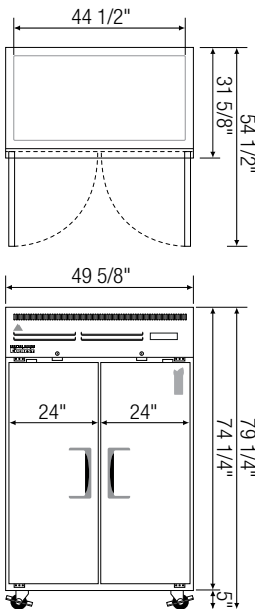


▲ ESR2

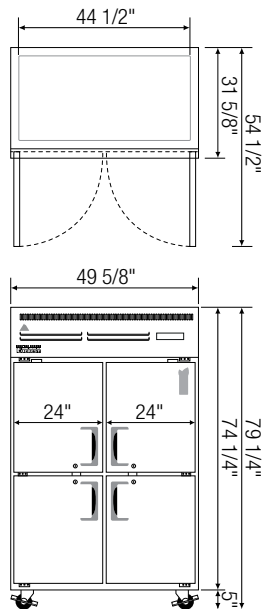

▲ ESRH4

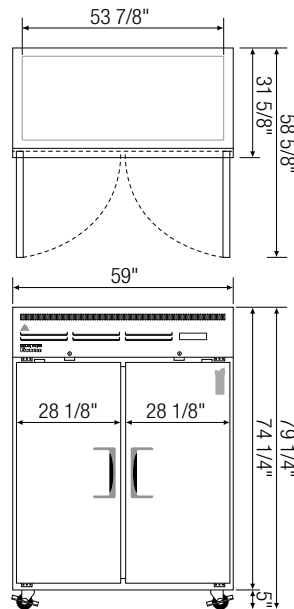

▲ ESWR2

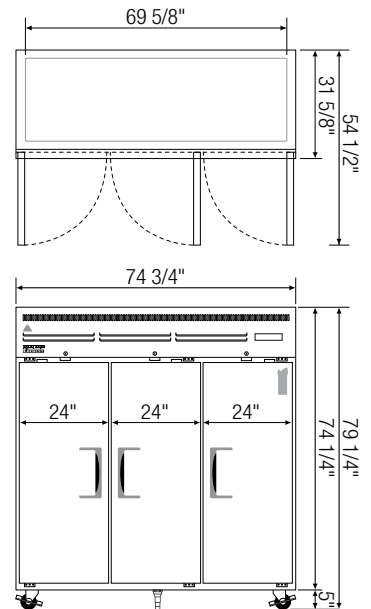

▲ ESR3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
ESR1	Ref	1	23	1/4+	1,926	R290	3	115-60-1	4	296	29 1/4	31 5/8	74 1/4
ESRH2	Ref	2 (H)	23	1/4+	1,926	R290	3	115-60-1	4	298	29 1/4	31 5/8	74 1/4
ESR2	Ref	2	48	1/4+	1,926	R290	6	115-60-1	4.5	401	49 5/8	31 5/8	74 1/4
ESRH4	Ref	4 (H)	48	1/4+	1,926	R290	6	115-60-1	4.5	404	49 5/8	31 5/8	74 1/4
ESWR2	Ref	2	55	1/3	2,311	R290	6	115-60-1	3	456	59	31 5/8	74 1/4
ESR3	Ref	3	71	3/4	4,445	R290	9	115-60-1	7.5	576	74 3/4	31 5/8	74 1/4

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator | (H) = Half Door

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

UPRIGHT REACH-IN FREEZERS

Top Mounted Condensing Unit

ES - Series • ESF1 • ESFH2 • ESF2 • ESWF2 • ESF3



▲ ESF1



▲ ESFH2



▲ ESF2



▲ ESWF2



▲ ESF3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set. Leg stabilizers standard for models ESF1, ESFH2 and ESF3.

Refrigeration System

- Top mounted, self-contained and fully detachable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- Airflow guard ensures optimal circulation of cold air. R290 models include full-length air duct system.
- Time-initiated and temperature-terminated auto defrost heater.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, (NEMA 5-15P for models ESF1 and ESFH2), (NEMA 5-20P for models ESF2, ESWF2 and ESF3).

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.
- Field reversible.

Shelving

- Three epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, -4°F. Temperature setting range from -10°F to 54°F.
- R290 models include audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door.



Dimensions

ABS Legs



Two additional front adjustable stainless steel clad ABS legs for model ESF1 and ESFH2 to provide extra stability when opening and closing doors, and one additional leg for ESF3 for weight support.




Equipped with 9 ft long NEMA 5-15P plug. (models ESF1, ESFH2)




Equipped with 9 ft long NEMA 5-20P plug. (models ESF2, ESWF2, ESF3)

Side View

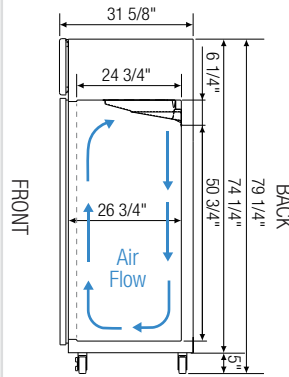


R404A models


Side View

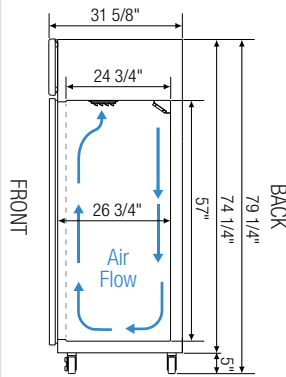


R290 models

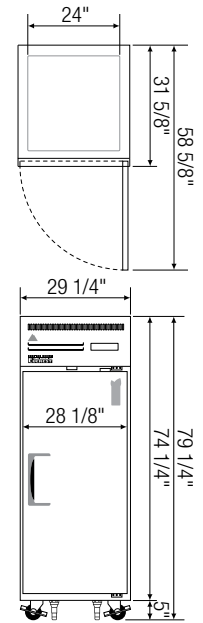


▲ ESF1




▲ ESFH2







▲ ESF2



▲ ESWF2

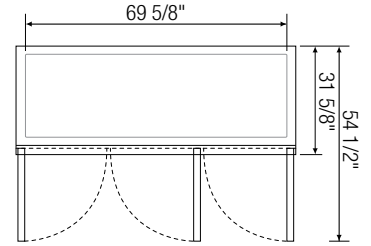

▲ ESF3

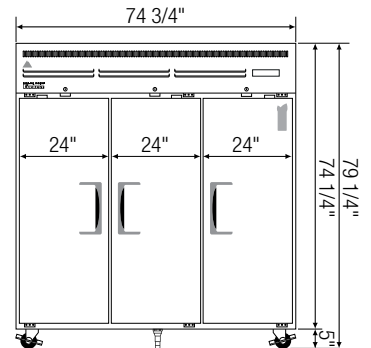

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
ESF1	Frz	1	23	1/2	1,670	R290	3	115-60-1	5	318	29 1/4	31 5/8	74 1/4
ESFH2	Frz	2 (H)	23	1/2	1,670	R290	3	115-60-1	5	322	29 1/4	31 5/8	74 1/4
ESF2	Frz	2	48	1/2 x 2	3,435 x 2	R-404A/R290^	6	115-60-1	14.81	468	49 5/8	31 5/8	74 1/4
ESWF2	Frz	2	55	1/2 x 2	3,435 x 2	R-404A/R290^	6	115-60-1	14.81	507	59	31 5/8	74 1/4
ESF3	Frz	3	71	1/2 x 2	3,435 x 2	R-404A/R290^	9	115-60-1	12.36	661	74 3/4	31 5/8	74 1/4

* : Height does not include 5" for casters.

Frz = Freezer | (H) = Half Door

† : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

^ : Contact factory for R290 information.

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.


UPRIGHT REACH-IN DUAL TEMPS

Top Mounted Condensing Unit


ES - Series • ESRFH2 • ESRF2A • ESWRF2 • ESWQ3 • ESRF3




▲ ESRFH2




▲ ESRF2A



▲ ESWRF2



▲ ESWQ3



▲ ESRF3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set. Leg stabilizers standard for model ESRFH2.

Refrigeration System

- Top mounted, self-contained and fully detachable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- Airflow guard ensures optimal circulation of cold air. R290 models include full-length air duct system.
- Time-initiated and temperature-terminated auto defrost heater for R404A and R290 freezers. Air defrost for R290 refrigerators.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.
- Field reversible (does not apply to model ESWQ3).

Shelving

- Epoxy coated, steel wire shelves (see table for quantity).
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F for refrigerators and -4°F for freezers. Temperature setting range from 33°F to 54°F for refrigerators and -10°F to 54°F for freezers.
- R290 models include audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (does not apply to model ESWQ3).



Dimensions

ABS Legs




Two additional front adjustable stainless steel clad ABS legs for model ESRFH2 to provide extra stability when opening and closing doors.




Equipped with 9 ft long NEMA 5-15P plug.

Side View

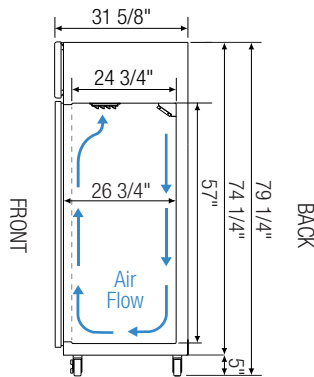


ESRF2A, ESWRF2, ESRF3, ESWQ3 (left compartment)

Side View

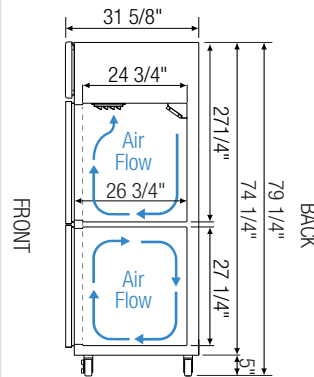


ESWQ3 (right compartment)

Side View

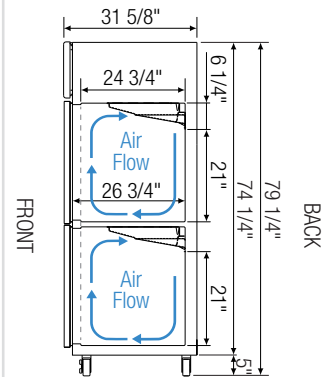

ESRFH2

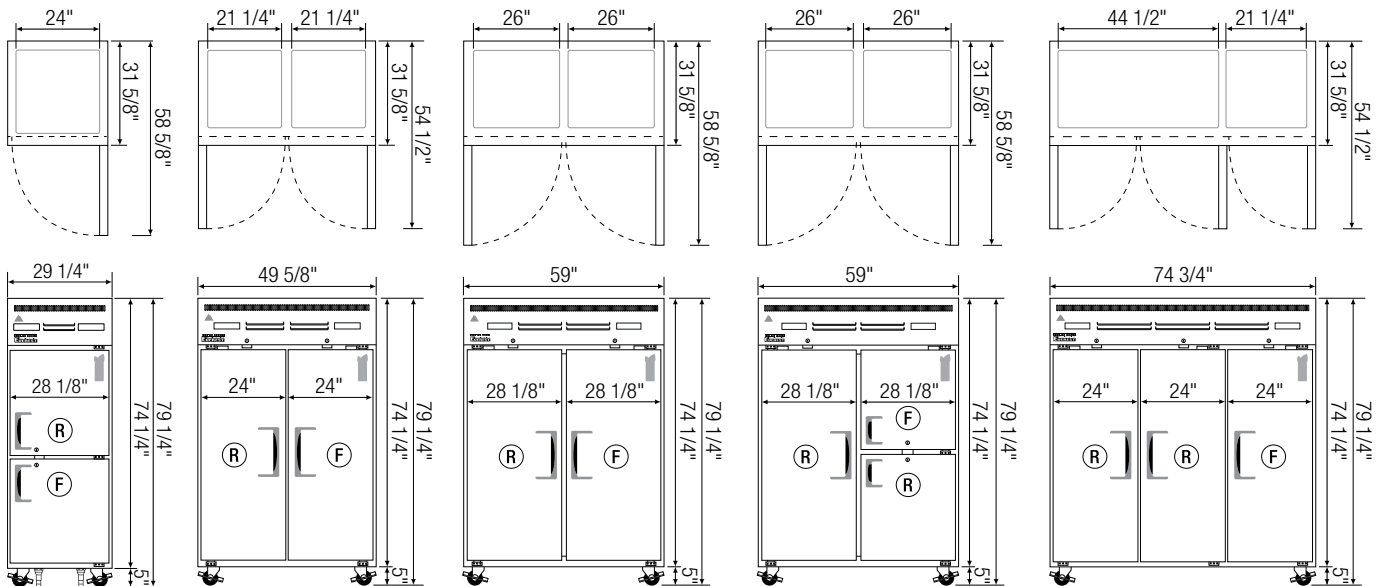

▲ ESRFH2

▲ ESRF2A

▲ ESWRF2

▲ ESWQ3

▲ ESRF3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
ESRFH2	Dual	2 (H)	11 (R) 11 (F)	1/2	3,435	R-404A / R290 [^]	2	115-60-1	7.57	343	29 1/4	31 5/8	74 1/4
ESRF2A	Dual	2	22 (R) 22 (F)	1/4+ (R) 1/2 (F)	1,926 (R) 1,670 (F)	R290	6	115-60-1	9	500	49 5/8	31 5/8	74 1/4
ESWRF2	Dual	2	26 (R) 26 (F)	1/4+ (R) 1/2 (F)	1,926 (R) 1,670 (F)	R290	6	115-60-1	9	529	59	31 5/8	74 1/4
ESWQ3	Dual	2 (H) 1 (FD)	39 (R) 13 (F)	1/4+ (R) 1/3 (F)	1,926 (R) 1,119 (F)	R290	5	115-60-1	5.5	524	59	31 5/8	74 1/4
ESRF3	Dual	3	46 (R) 22 (F)	1/4+ (R) 1/2 (F)	1,926 (R) 1,670 (F)	R290	9	115-60-1	10	654	74 3/4	31 5/8	74 1/4

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

[^]: Contact factory for R290 information.

Dual = Ref & Frz Combo | (FD) = Full Door | (H) = Half Door
(R) = Refrigerator | (F) = Freezer

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

DOOR & DRAWER COMBO UPRIGHT REACH-INS

Top Mounted Condensing Unit

ES - Series • ESR1D2 • ESR2D2 • ESR2D4 • ESRF2D2 • ESWQ2D2




▲ ESR1D2



▲ ESR2D2



▲ ESR2D4



▲ ESRF2D2
(Dual Temp)



▲ ESWQ2D2
(Dual Temp)

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set. Leg stabilizers standard for model ESR1D2.

Refrigeration System

- Top mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system and airflow guard ensure optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Thick gauge, stainless steel drawer frames with low-friction ball bearings.
- Snap-in magnetic door and drawer gaskets make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft (does not apply to drawers).

Shelving

- Epoxy coated, steel wire shelves (see table for quantity).
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F for refrigerators and -4°F for freezers. Temperature setting range from 33°F to 54°F for refrigerators and -10°F to 54°F for freezers.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

ABS Legs





Two additional front adjustable stainless steel clad ABS legs for model ESR1D2 to provide extra stability when opening and closing doors.




Equipped with 9 ft long NEMA 5-15P plug.


Side View

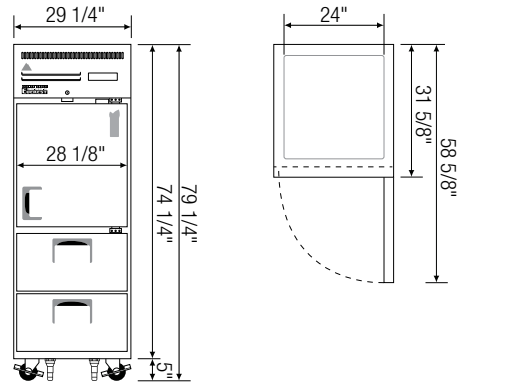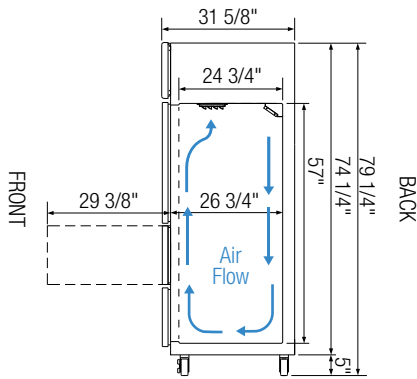


▲ ESR1D2

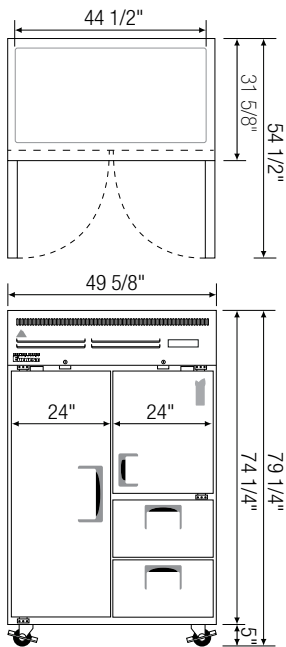


▲ ESR2D2

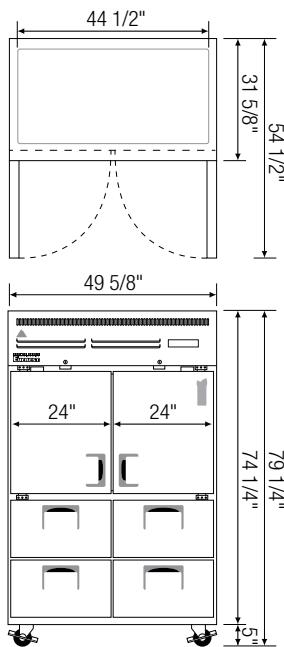

▲ ESR2D4

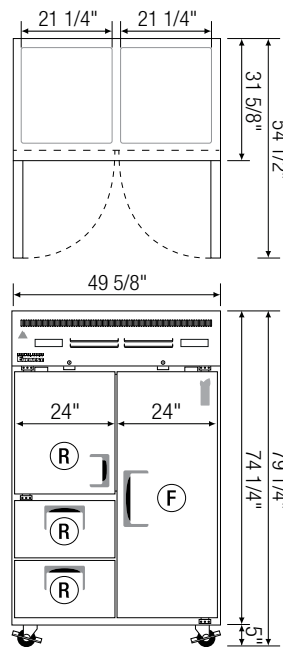

▲ ESRF2D2
(Dual Temp)

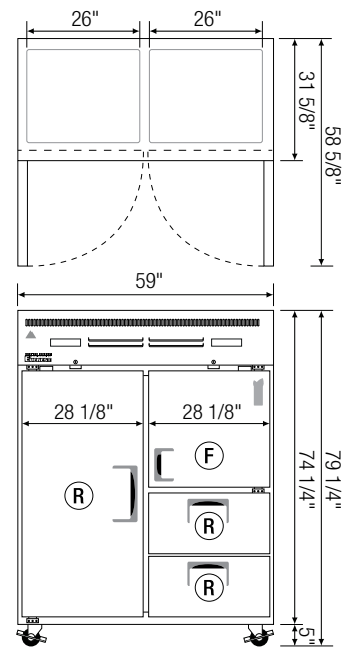

▲ ESWQ2D2
(Dual Temp)

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
ESR1D2	Ref	1 (H) 2 (DR)	23	1/4+	1,926	R290	2	115-60-1	3.7	340	29 1/4	31 5/8	74 1/4
ESR2D2	Ref	1 (FD) / 1 (H) 2 (DR)	48	1/3	2,311	R290	5	115-60-1	3	463	49 5/8	31 5/8	74 1/4
ESR2D4	Ref	2 (H) 4 (DR)	48	1/3	2,311	R290	4	115-60-1	3	479	49 5/8	31 5/8	74 1/4
ESRF2D2	Dual	1 (FD) / 1 (H) 2 (DR)	22 (R) 22 (F)	1/4+ (R) 1/2 (F)	1,926 (R) 1,670 (F)	R290 R290	5	115-60-1	9	525	49 5/8	31 5/8	74 1/4
ESWQ2D2	Dual	1 (FD) / 1 (H) 2 (DR)	39 (R) 13 (F)	1/4+ (R) 1/3 (F)	1,926 (R) 2,311 (F)	R290 R290	4	115-60-1	5.5	556	59	31 5/8	74 1/4

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator | Dual = Ref & Frz Combo
(H) = Half Door | (FD) = Full Door | (DR) = Drawer

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (†) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

UPRIGHT REACH-IN GLASS DOOR REFRIGERATORS

Top Mounted Condensing Unit

ES - Series • ESGR1 • ESGRH2 • ESGR2 • ESGRH4 • ESGWR2 • ESGR3A



▲ ESGR1



▲ ESGRH2



▲ ESGR2



▲ ESGRH4



▲ ESGWR2



▲ ESGR3A

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set. Leg stabilizers standard for models ESGR1, ESGRH2, and ESGR3A.

Refrigeration System

- Top mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system and airflow guard ensure optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Matte finish aluminum door frames.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.
- Pre-installed door locks keep your items safe from theft (does not apply to models ESGRH2 and ESGRH4).
- Field reversible (does not apply to model ESGRH4).

Shelving

- Four epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

ABS Legs





Two additional front adjustable stainless steel clad ABS legs for models ESGR1 and ESGRH4 to provide extra stability when opening and closing door, and one additional leg for model ESGR3A for weight support.




Equipped with 9 ft long NEMA 5-15P plug.


Side View

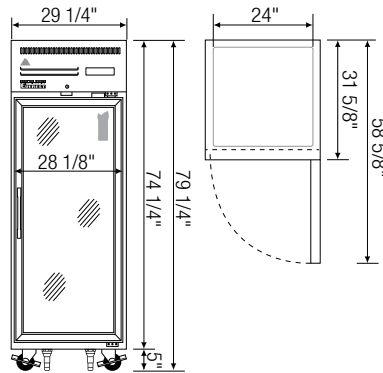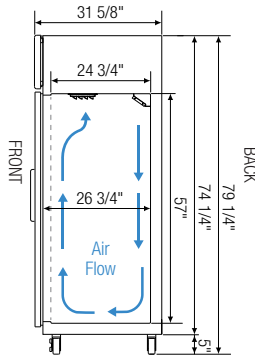


▲ ESGR1

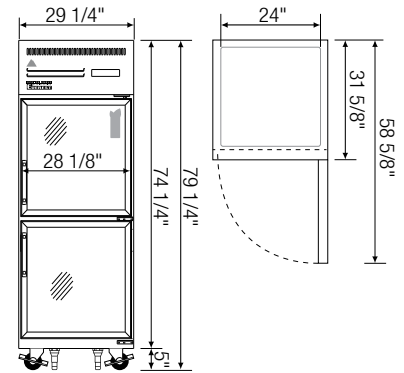


▲ ESGRH2




▲ ESGR2







▲ ESGRH4



▲ ESGWR2

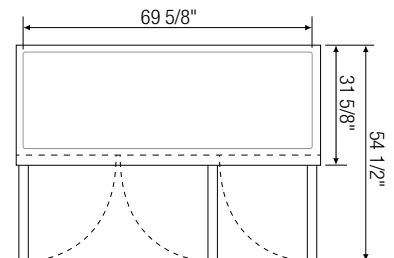

▲ ESGR3A

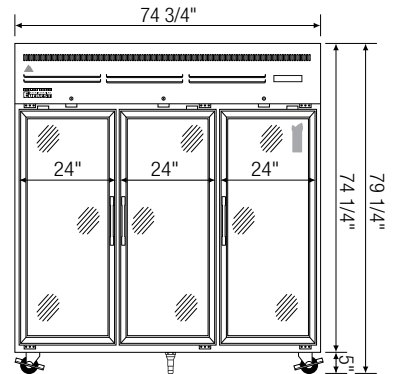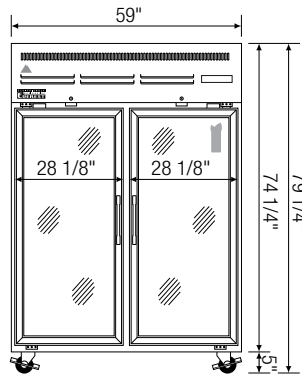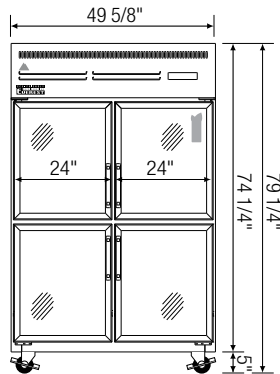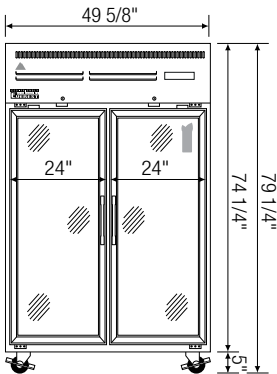

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D ^a	H [*]
ESGR1	Ref	1	23	1/4+	1,926	R290	4	115-60-1	3.7	329	29 1/4	31 5/8	74 1/4
ESGRH2	Ref	2 (H)	23	1/4+	1,926	R290	4	115-60-1	3.7	329	29 1/4	31 5/8	74 1/4
ESGR2	Ref	2	48	1/3	2,311	R290	8	115-60-1	3	467	49 5/8	31 5/8	74 1/4
ESGRH4	Ref	4 (H)	48	1/3	2,311	R290	8	115-60-1	3	467	49 5/8	31 5/8	74 1/4
ESGWR2	Ref	2	55	1/2	1,670	R290	8	115-60-1	5.5	540	59	31 5/8	74 1/4
ESGR3A	Ref	3	71	3/4	4,445	R290	12	115-60-1	7.8	663	74 3/4	31 5/8	74 1/4

* : Height does not include 5" for casters.

† : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a : Exterior depth dimension does not include 1-1/2" for door handles.

(H) = Half Door | Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

GLASS & SOLID COMBINATION HALF-DOOR UPRIGHT REACH-IN REFRIGERATORS

Top Mounted Condensing Unit

ES - Series • EGS2 • EGSDH2 • EGS4 • EGSWH4 • EGS6



▲ EGS2



▲ EGSDH2
(DUAL TEMP)



▲ EGS4



▲ EGSWH4



▲ EGS6

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set. Leg stabilizers standard for models EGS2, EGSDH2 and EGS6.

Refrigeration System

- Top mounted, self-contained and fully detachable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- Airflow guard ensures optimal circulation of cold air. R290 models include full-length air duct system.
- Time-initiated and temperature-terminated auto defrost heater for R404A and R290 freezers. Air defrost for R290 refrigerators.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes and matte finish aluminum door frames for glass doors.
- Heavy duty stainless steel interior / exterior with 2.5" thick high density polyurethane insulation for solid doors.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gaskets make cleaning and replacement an easy process.
- Heavy duty, die-cast door handles for glass doors. High strength, recessed door handles for solid doors.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Four epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F for refrigerators and -4°F for freezers. Temperature setting range from 33°F to 54°F for refrigerators and -10°F to 54°F for freezers.
- R290 models include audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

ABS Legs




Two additional front adjustable stainless steel clad ABS legs for models EGS2 and EGSDH2 to provide extra stability when opening and closing door, and one additional leg for model EGS6 for weight support.




Equipped with 9 ft long NEMA 5-15P plug.

Side view

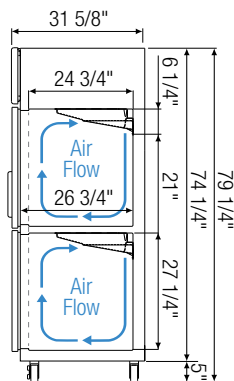


EGSDH2






Side view

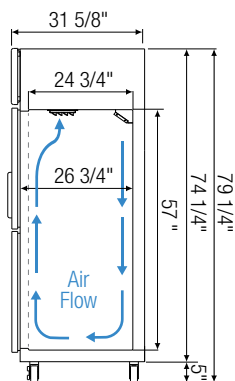


EGS2, EGS4,
EGSWH4, EGS6

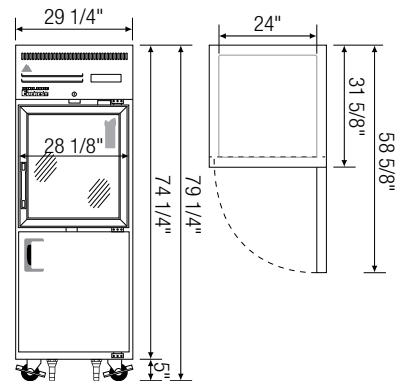


▲ EGS2

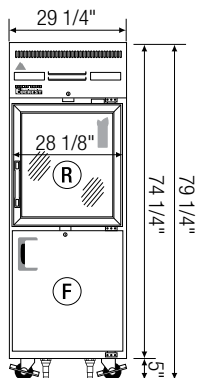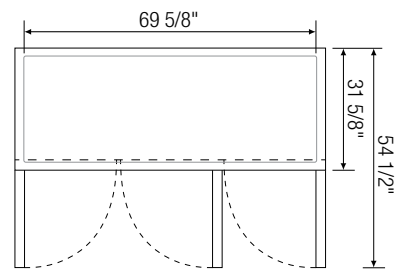


▲ EGS2
(Dual Temp)

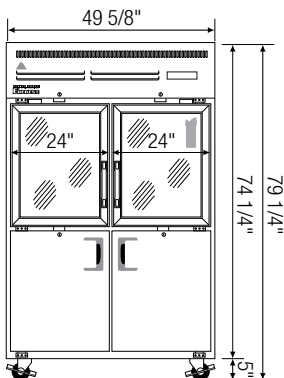

▲ EGS4

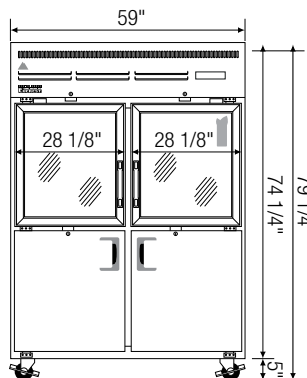

▲ EGSWH4

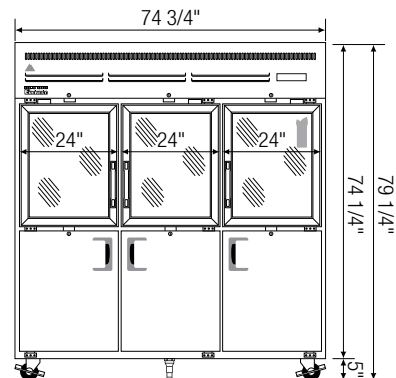

▲ EGS6

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D ^a	H [*]
EGS2	Ref	2 (H)	23	1/4+	1,926	R290	4	115-60-1	3.7	322	29 1/4	31 5/8	74 1/4
EGSDH2	Dual	2 (H)	11 (R) 11 (F)	1/2	3,435	R-404A / R290 [^]	4	115-60-1	7.57	356	29 1/4	31 5/8	74 1/4
EGS4	Ref	4 (H)	48	1/3	2,311	R290	8	115-60-1	3	449	49 5/8	31 5/8	74 1/4
EGSWH4	Ref	4 (H)	55	1/2	1,670	R290	8	115-60-1	5.5	486	59	31 5/8	74 1/4
EGS6	Ref	6 (H)	71	3/4	4,445	R290	12	115-60-1	7.8	636	74 3/4	31 5/8	74 1/4

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a: Exterior depth dimension does not include 1-1/2" for door handles.

^: Contact factory for R290 information.

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator | Dual = Ref & Frz Combo
(H) = Half Door | (R) = Refrigerator | (F) = Freezer



Please visit our website for updated
Energy Efficiency information.

Upright Reach-Ins

Bottom Mounted Condensing Unit - *EB Series*

Reference Model: EBGR2

The series provides versatility in storage, display and temperature combinations in a traditional, bottom mounted design. It also features a deeper cabinet depth to meet the operator's specific space and storage needs. Patented vacuum relief valves in addition to conventional pressure relief mechanisms ensure rapid re-entry while keeping an airtight seal.



Exterior



Interior

1: Digital Control

Multi-function with easy to read LED display.



2: Field Reversible Doors*

Detachable for on the spot field reversal.

3: Double Pane Glass

Low emissivity and UV reflective to help regulate cabinet temperature.

4: Pre-Installed Door Locks

Provides security options for any situation.

5: Chrome Plated Door Handle


High strength die-cast metal.

6: Heavy Duty Swivel Casters

Standard 5" with locks on front set. Optional 3" swivel caster or height-adjustable leg replacements also available.

Leg Stabilizers*

Adjustable stainless steel clad ABS leg provides extra stability when opening doors.



Blizzard R290 Condensing Unit*

Bottom mounted, self-contained, fully detachable and uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

Audible Overheat Protection Alarm*

Keeps compressor and condenser coil from overheating.

Self-Maintaining Condensate Pan


Energy efficient and requires no external drains or electric heaters.

ECM Evaporator Fan Motor*

Electronically Commutated. Achieves rapid cooling with less energy.

ECM Condenser Fan Motor*

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

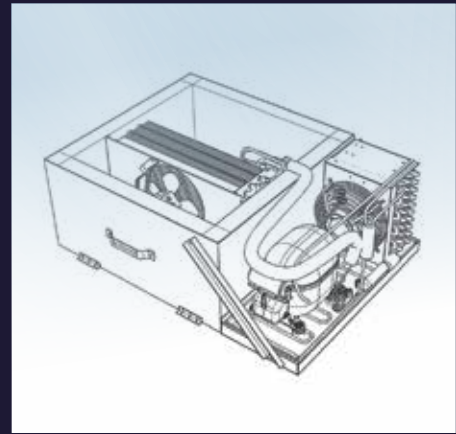

7: Full Length Air Duct*

Ensures optimal distribution of cold air.

8: Energy Efficient LED

Provides bright, high color illumination at lower heat output.

9: Air Circulation Guards

Guarantees unrestricted airflow in cabinet interior.

10: Vacuum Relief Valve

Automatically equalizes cabinet pressure for smooth access to cabinet interior when re-opening doors.

11: Ridge-Lined Door Gaskets

Keeps air tight seal and promotes smooth cabinet re-entry. Snap-in for easy cleaning and replacement.

12: Stainless Steel Interior & Exterior



High quality with rounded corners for a hazard-free workspace.

13: Air Tight Seal

Self-closing door with adjustable torsion system ensures a positive seal.

14: Thick Insulation

2.5" thick high density polyurethane insulation ensures temperature stability and conserves energy.



BOTTOM MOUNT REACH-IN REFRIGERATORS

Bottom Mounted Condensing Unit

EB – Series • EBR1 • EBWR1 • EBWRH2 • EBNR2 • EBSR2 • EBR2 • EBR3



▲ EBR1



▲ EBWR1



▲ EBWRH2



▲ EBNR2



▲ EBSR2



▲ EBR2



▲ EBR3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Deeper cabinet interior for more storage options.
- Four 5" swivel casters with locks on front set (six for model EBR3). Leg stabilizers standard for all models.

Refrigeration System

- Bottom mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system and airflow guard ensure optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.
- Field reversible.

Shelving

- Three epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door.



5 YEAR Compressor
3 YEAR Parts & Labor

Dimensions

ABS Legs



Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening and closing door, and three additional legs for EBR3 for weight support.

Vacuum Relief Mechanism






The vacuum relief valve equalizes cabinet pressure for rapid door re-entry.





Equipped with 9 ft long NEMA 5-15P plug.



Side View

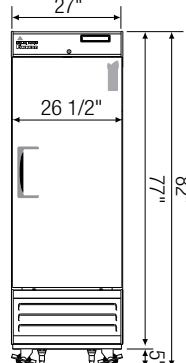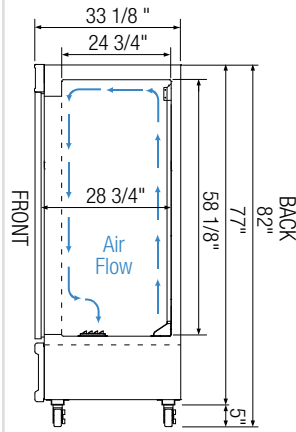



▲ EBR1

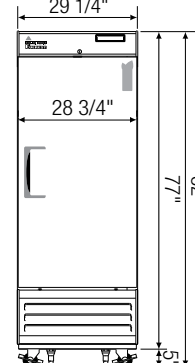



▲ EBWR1

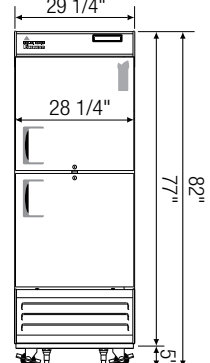



▲ EBWRH2

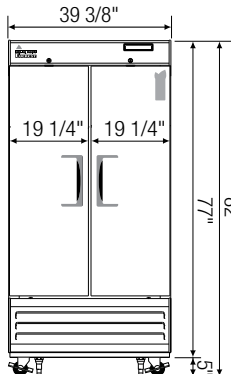



▲ EBNR2

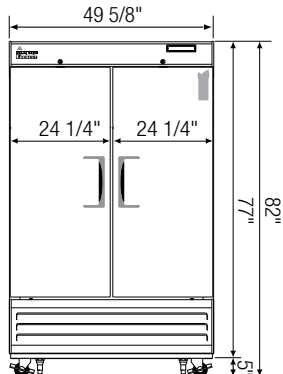

▲ EBSR2

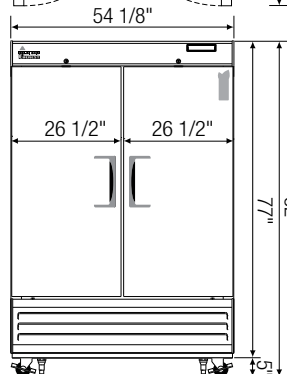

▲ EBR2

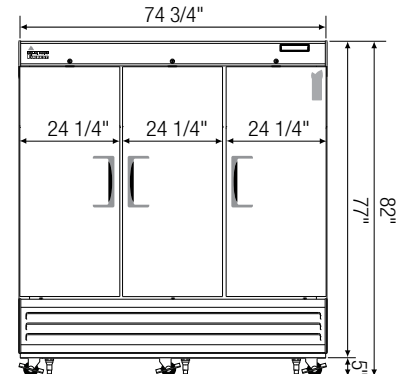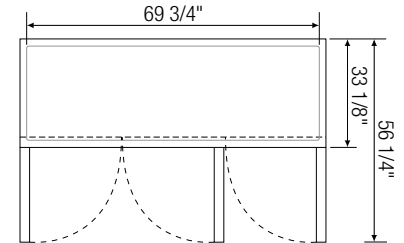

▲ EBR3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
EBR1	Ref	1	21	1/4+	1,852	R290	3	115-60-1	2.5	336	27	33 1/8	77
EBWR1	Ref	1	23	1/4+	1,852	R290	3	115-60-1	2.5	341	29 1/4	33 1/8	77
EBWRH2	Ref	2 (H)	23	1/4+	1,852	R290	3	115-60-1	2.5	348	29 1/4	33 1/8	77
EBNR2	Ref	2	33	1/3	2,311	R290	6	115-60-1	3	418	39 3/8	33 1/8	77
EBSR2	Ref	2	48	1/3	2,311	R290	6	115-60-1	3.5	471	49 5/8	33 1/8	77
EBR2	Ref	2	50	1/3	2,311	R290	6	115-60-1	3.5	520	54 1/8	33 1/8	77
EBR3	Ref	3	71	3/4	4,445	R290	9	115-60-1	7	611	74 3/4	33 1/8	77

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator | (H) = Half Door

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

BOTTOM MOUNT REACH-IN FREEZERS

Bottom Mounted Condensing Unit

EB - Series • EBF1 • EBWF1 • EBWFH2 • EBNF2 • EBSF2 • EBF2 • EBF3



▲ EBF1



▲ EBWF1



▲ EBWFH2



▲ EBNF2



▲ EBSF2



▲ EBF2



▲ EBF3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Deeper cabinet interior for more storage options.
- Four 5" swivel casters with locks on front set (six casters for model EBF3). Leg stabilizers standard for all models.

Refrigeration System

- Bottom mounted, self-contained and retractable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- Airflow guard ensures optimal circulation of cold air. R290 models include full-length air duct system.
- Time-initiated and temperature-terminated auto defrost heater.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, (NEMA 5-15P for models EBF1, EBWF1, EBWFH2, EBNF2, EBSF2 and EBF2), (NEMA 5-20P for model EBF3).

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.
- Field reversible.

Shelving

- Three epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, -4°F. Temperature setting range from -10°F to 54°F.
- R290 models include audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door.



Dimensions

ABS Legs



Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening and closing door, and three additional legs for EBF3 for weight support.

Vacuum Relief Mechanism






The vacuum relief valve equalizes cabinet pressure for rapid door re-entry.





Equipped with 9 ft long NEMA 5-15P plug.



Side View

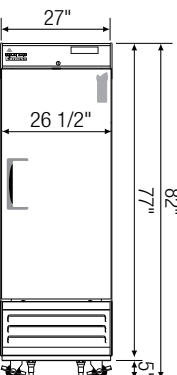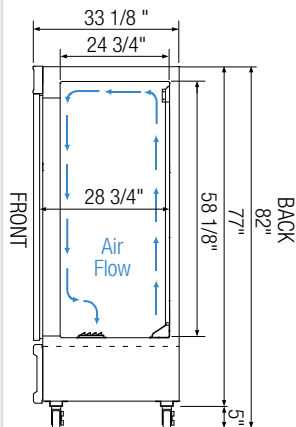



▲ EBF1

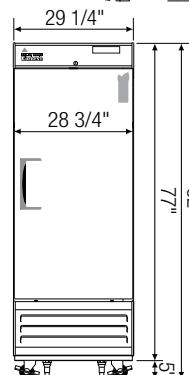



▲ EBWF1

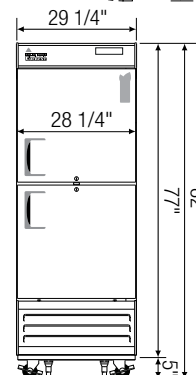



▲ EBWFH2

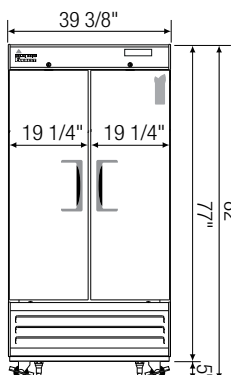



▲ EBNF2

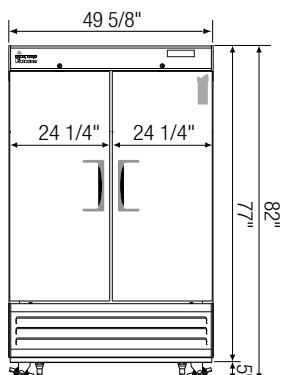

▲ EBSF2

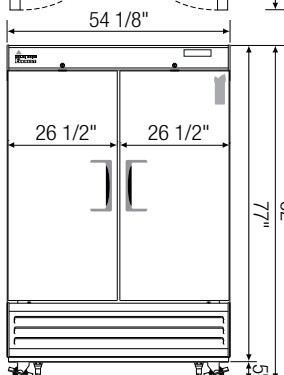

▲ EBF2

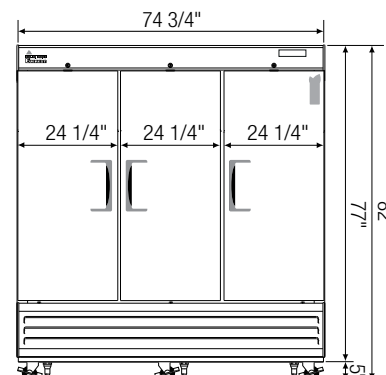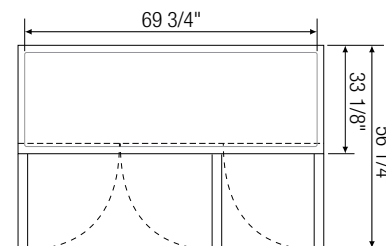

▲ EBF3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
EBF1	Frz	1	21	1/2	3,435	R-404A / R290 [^]	3	115-60-1	7.59	339	27	33 1/8	77
EBWF1	Frz	1	23	1/2	3,435	R-404A / R290 [^]	3	115-60-1	7.59	348	29 1/4	33 1/8	77
EBWFH2	Frz	2 (H)	23	1/2	3,435	R-404A / R290 [^]	3	115-60-1	7.59	352	29 1/4	33 1/8	77
EBNF2	Frz	2	33	1	6,197	R-404A / R290 [^]	6	115-60-1	7.94	451	39 3/8	33 1/8	77
EBSF2	Frz	2	48	1	6,197	R-404A / R290 [^]	6	115-60-1	7.95	479	49 5/8	33 1/8	77
EBF2	Frz	2	50	1	6,197	R-404A / R290 [^]	6	115-60-1	7.95	590	54 1/8	33 1/8	77
EBF3	Frz	3	71	1/2 x 2	3,435 x 2	R-404A / R290 [^]	9	115-60-1	10.98	680	74 3/4	33 1/8	77

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

[^]: Contact factory for R290 information.

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Frz = Freezer | (H) = Half Door




Please visit our website for updated Energy Efficiency information.

BOTTOM MOUNT UPRIGHT REACH-IN DUAL TEMPS

Bottom Mounted Condensing Unit

EB - Series • EBWRFH2 • EBSRF2 • EBRF2 • EBRF3



▲ EBWRFH2



▲ EBSRF2



▲ EBRF2



▲ EBRF3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Deeper cabinet interior for more storage options.
- Four 5" swivel casters with locks on front set (six for model EBRF3). Leg stabilizers standard for all models.

Refrigeration System

- Bottom mounted, self-contained and retractable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- Airflow guard ensures optimal circulation of cold air. R290 models include full-length air duct system.
- Time-initiated and temperature-terminated auto defrost heater for R404A and R290 freezers. Air defrost for R290 refrigerators.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.
- Field reversible.

Shelving

- Epoxy coated, steel wire shelves (see table for quantity).
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F for refrigerators and -4°F for freezers. Temperature setting range from 33°F to 54°F for refrigerators and -10°F to 54°F for freezers.
- R290 models include audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door.



Dimensions

ABS Legs



Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening and closing door, and three additional legs for EBRF3 for weight support.

Vacuum Relief Mechanism




The vacuum relief valve equalizes cabinet pressure for rapid door re-entry.




Equipped with 9 ft long NEMA 5-15P plug.

Side View








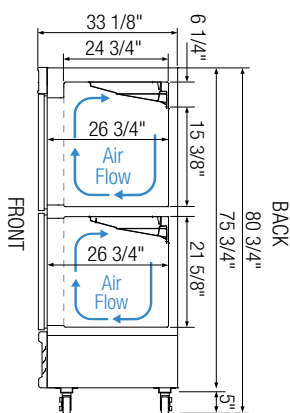


EBWRFH2

Side View

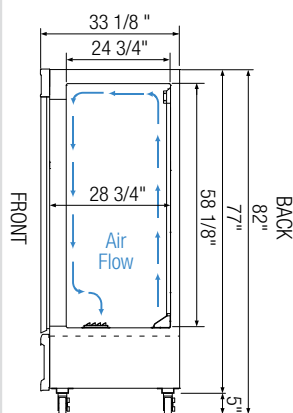

EBSRF2, EBRF2, EBRF3

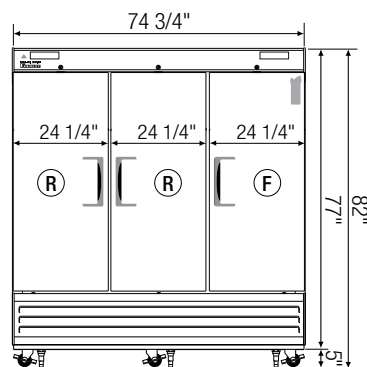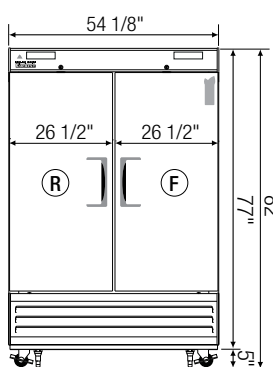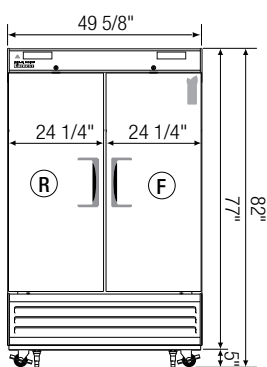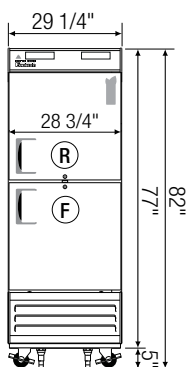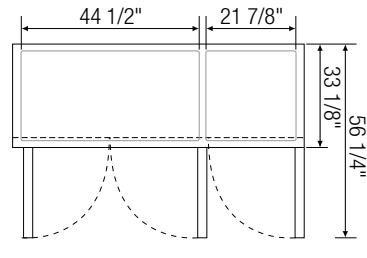

▲ EBWRFH2

▲ EBSRF2

▲ EBRF2

▲ EBRF3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
EBWRFH2	Dual	2 (H)	11 (R) 11 (F)	1/2	3,435	R-404A / R290 [^]	2	115-60-1	7.59	341	29 1/4	33 1/8	77
EBSRF2	Dual	2	22 (R) 22 (F)	1/4+ (R) 1/2 (F)	1,672 (R) 3,435 (F)	R290 R-404A / R290 [^]	6	115-60-1	10.27	546	49 5/8	33 1/8	77
EBRF2	Dual	2	24 (R) 24 (F)	1/4+ (R) 1/2 (F)	1,672 (R) 3,435 (F)	R290 R-404A / R290 [^]	6	115-60-1	10.87	613	54 1/8	33 1/8	77
EBRF3	Dual	3	46 (R) 22 (F)	1/3+ (R) 1/2 (F)	2,612 (R) 3,435 (F)	R290 R-404A / R290 [^]	9	115-60-1	14.06	698	74 3/4	33 1/8	77

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

[^]: Contact factory for R290 information.

(R) = Refrigerator | (F) = Freezer
Dual = Ref & Frz Combo | (H) = Half Door

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated
Energy Efficiency information.

BOTTOM MOUNT UPRIGHT REACH-IN GLASS DOOR REFRIGERATORS

Bottom Mounted Condensing Unit

EB - Series • EBGR1 • EBGNR2 • EBGR2



▲ EBGR1



EBGNR2



▲ EBGR2

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set. Leg stabilizers standard for all models.

Refrigeration System

- Bottom mounted, self-contained, fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system and airflow guard ensure optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Matte finish aluminum door frames.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.
- Pre-installed door locks keep your items safe from theft (from 2017 production).
- Field reversible.

Shelving

- Four epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door.



Dimensions

ABS Legs



Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening and closing door.

Vacuum Relief Mechanism





The vacuum relief valve equalizes cabinet pressure for rapid door re-entry.




Equipped with 9 ft long NEMA 5-15P plug.



Side View

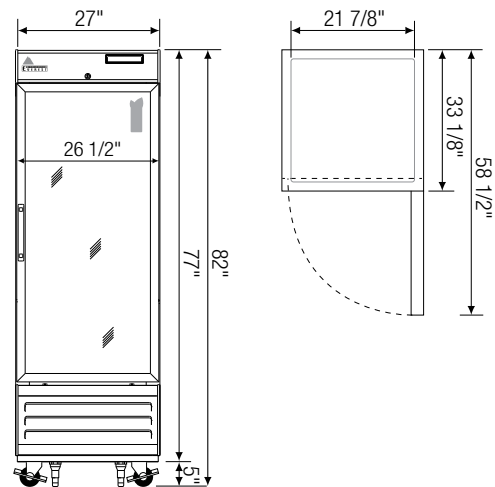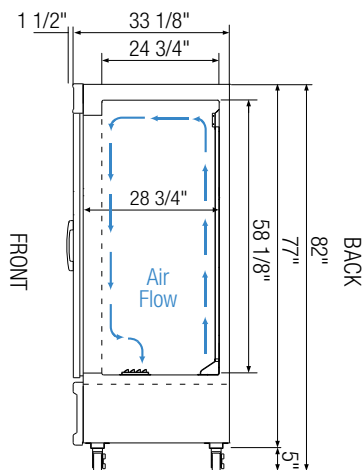


▲ EBGR1

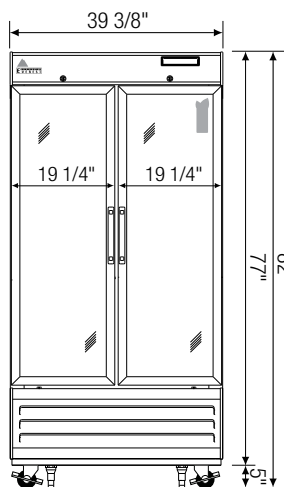

▲ EBGNR2

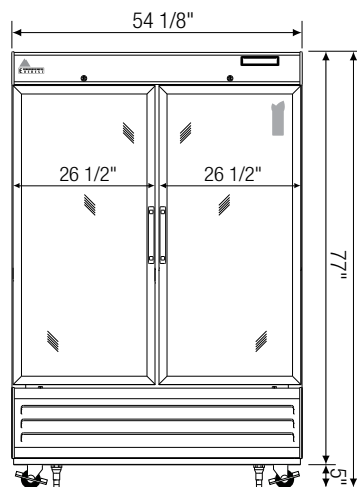

▲ EBGR2

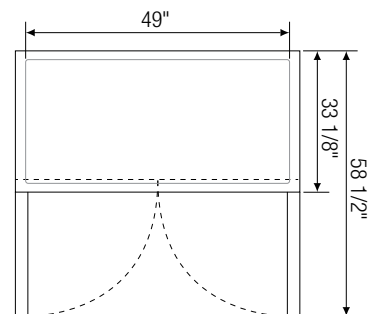

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D ^a	H [*]
EBGR1	Ref	1	21	1/3	2,311	R290	4	115-60-1	3	370	27	33 1/8	77
EBGNR2	Ref	2	33	1/3	2,311	R290	8	115-60-1	3	491	39 3/8	33 1/8	77
EBGR2	Ref	2	50	3/4	4,445	R290	8	115-60-1	7	596	54 1/8	33 1/8	77

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a: Exterior depth dimension does not include 1-1/2" for door handles.

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

DRY AGER AND THAWING REFRIGERATORS

Bottom Mounted Condensing Unit

EB - Series • EDA1 • EDA2



▲ EDA1



▲ EDA2

Cabinet Construction

- Heavy duty stainless steel exterior with rounded corners for a hazard-free workspace.
- PFOA free, ceramic coated aluminum interior walls diffuse infrared rays which enhance the meat maturation process and high quality stainless steel floor.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set. Leg stabilizers standard for all models.

Refrigeration System

- Bottom mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Dual air paths with multiple electronically commutated (ECM) fan motors optimize circulation and accelerate the meat maturation process. Three fan motors for model EDA1. Five fan motors for model EDA2.
- Full-length air duct system and airflow guard ensure optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes and matte finish aluminum door frames for glass doors.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.
- Pre-installed door locks keep your items safe from theft.
- Field reversible.

Shelving

- Four stainless steel shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Stainless steel hangers and hooks.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Dimensions

ABS Legs



Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening and closing door.

Vacuum Relief Mechanism




The vacuum relief valve equalizes cabinet pressure for rapid door re-entry.





Equipped with 9 ft long NEMA 5-15P plug.



Side View

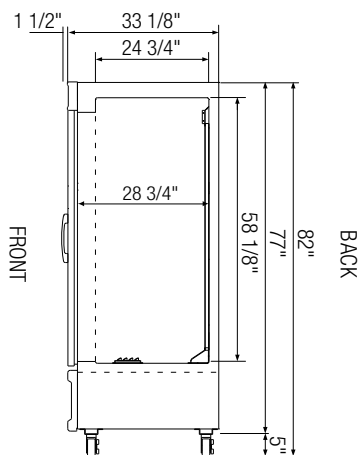


Air Circulation

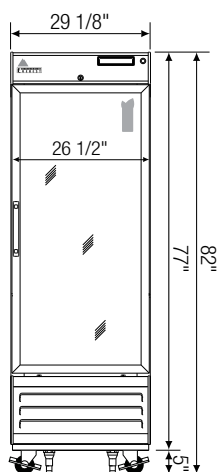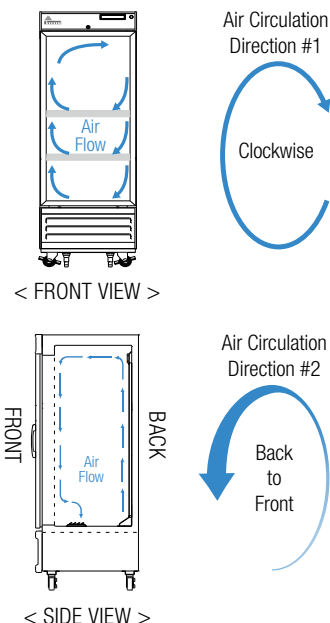

▲ EDA1

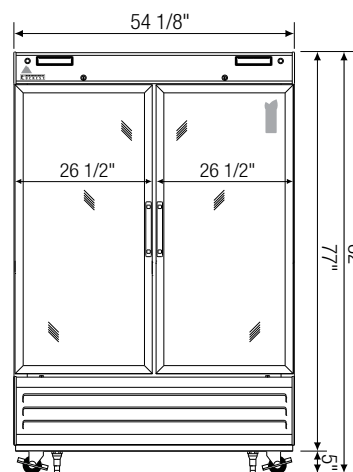

▲ EDA2

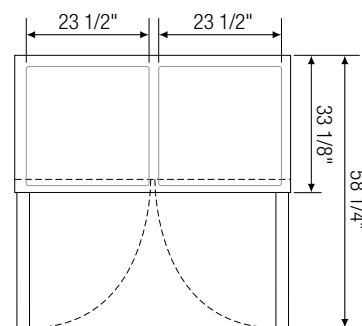

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu.Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D ^a	H [*]
EDA1	Ref	1	22	1/3	2,311	R290	4	115-60-1	3	390	29 1/4	33 1/8	77
EDA2	Ref	2	48	1/3 x 2	2,311 x 2	R290	8	115-60-1	7	609	54 1/8	33 1/8	77

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a: Exterior depth dimension does not include 1-1/2" for door handles.

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.




Please visit our website for updated Energy Efficiency information.


Standard Features & Benefits

Vaccum Relief Mechanisms


Difficulties in opening refrigerator and freezer doors often occur when the cooler cabinet interior is exposed to warmer ambient room temperature during entry. Warm air contracts as it mixes with cold air creating a powerful vacuum effect. Everest units are equipped with patented vacuum relief mechanisms to alleviate pressure and to promote smooth door entry.

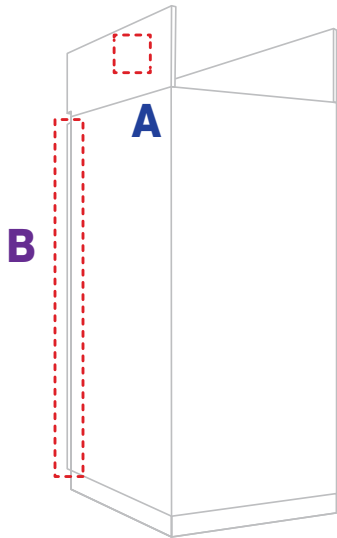

Upright Reach-Ins (Top Mount)

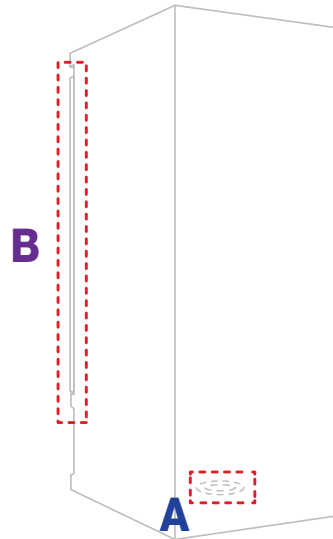


Upright Reach-Ins (Bottom Mount)



A. Vacuum Relief Valve

This Everest patented mechanism helps control the passage of warm air into the cabinet interior by slightly shifting up and down whenever a door is opened or closed. This action rapidly equalizes pressure as it's needed while keeping cold air from escaping.

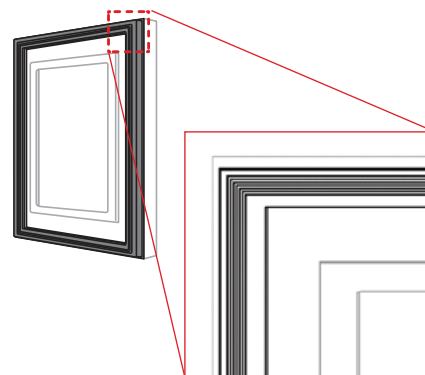

















B. Ridge-Lined Door Gasket

Distinct from flat door gaskets, ridge-lined door gaskets have more flexibility while still keeping an airtight seal. The ribbed effect creates space between two planes which greatly surface suction between the door and the door frame.


Field Reversible Doors

Smaller kitchens depend on creative, space-saving techniques and well planned installations. Sometimes, the solution is as simple as a door swing orientation. Most Everest products come with doors that can be reversed in the field with just a few simple steps.

# of Doors	Standard	Customized
Single	 	 
Double		  
Triple		      

Caster & Leg Height Variation

Some spaces have very specific height requirements for refrigerators and freezers. Sometimes an inch or two is all that’s needed to fit an equipment under a counter, or in a low ceiling room. Everest products come with front-locking 5” swivel casters. To meet height specifications, Everest also offers 3” locking casters we well as interchangeable legs that adjust from 3.5” to 6” tall. These options are available at no additional charge for models that come standard with casters.

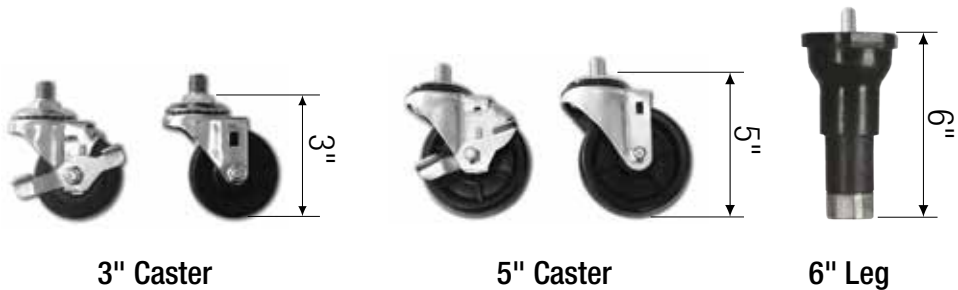

Glass Door Merchandisers

EM Series

Reference Model: EMGR69B

Maximizing product visibility and accessibility, the Glass Merchandiser series feature clear, low emissivity, self-closing glass doors that reflect UV rays and provide excellent insulation and energy efficiency. Vivid LED lighting enhances the appeal of displayed items for increased high impulse sales.

● Exterior ○ Interior

1: Digital Control

Multi-function with easy to read LED display.



2: Double Pane Glass

Low emissivity and UV reflective to help regulate cabinet temperature.

3: Self-Closing Mechanism

Angled tracks allow sliding glass doors to close automatically.

4: Sliding Door Gasket

Slide-in and magnetized for ease of cleaning and replacement.

5: Heavy Duty Door Bumper

Provides impact absorption to sliding glass doors.

6: Epoxy Coated Shelves

Durable, steel wire shelves with built-in airflow guards.

7: Adjustable Screw Legs

Optional 5" or 3" swivel caster or height-adjustable leg replacements also available.



Blizzard R290 Condensing Unit*

Bottom mounted, self-contained, fully detachable and uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

Audible Overheat Protection Alarm*

Keeps compressor and condenser coil from overheating.

Self-Maintaining Condensate Pan


Energy efficient and requires no external drains or electric heaters.

ECM Evaporator Fan Motor*

Electronically Commutated. Achieves rapid cooling with less energy.

ECM Condenser Fan Motor*

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

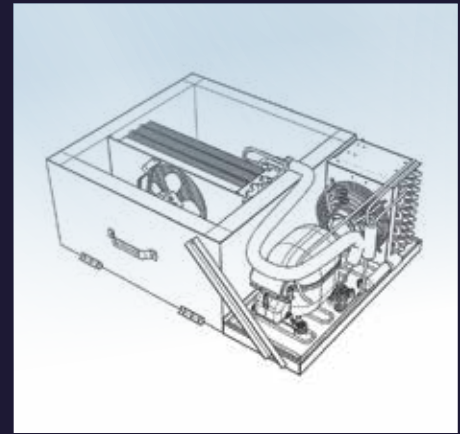

8: Full Length Air Duct*

Ensures optimal distribution of cold air.

9: Energy Efficient LED

Provides bright, high color illumination at lower heat output. Equipped with on/off switch.

10: Detachable Drain Plug




Removes for ease of cleaning.

11: Rubber and Fiber Strip Gaskets

Provides additional temperature and moisture protection for sliding doors.

12: Thick Insulation

2.5" thick high density polyurethane insulation ensures temperature stability and conserves energy.



GLASS DOOR MERCHANDISER REFRIGERATORS

Single Swing Door

EM - Series • EMGR5 • EMGR8 • EMGR10(B) • EMGR20 • EMGR24(B)



▲ EMGR5



▲ EMGR8



▲ EMGR10



▲ EMGR10B



▲ EMGR20



▲ EMGR24



▲ EMGR24B

Cabinet Construction

- Heavy duty white coated steel interior / exterior. Black exterior standard for models EMGR10B and EMGR24B.
- Stainless steel floor interior has rounded corners and detachable drain plug for ease of cleaning.
- 2.5" thick high density polyurethane insulation.
- Four height adjustable screw legs.

Refrigeration System

- Bottom mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal distribution of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Black PVC door frames.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.
- Field reversible (does not apply to models EMGR5, EMGR8, EMGR10 and EMGR10B).

Shelving

- Epoxy coated, steel wire shelves with airflow guard (see table for quantity).
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- Wine rack (applies to model EMGR24 and EMGR24B).
- 5" or 3" swivel casters with locks on front set.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (applies to all models).




5 YEAR Compressor
3 YEAR Parts & Labor



Dimensions





Equipped with 9 ft long
NEMA 5-15P plug.




▲ EMGR5

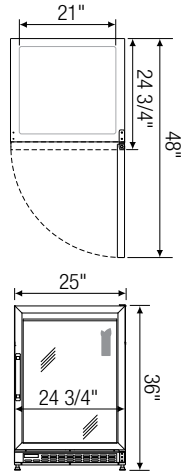


▲ EMGR8

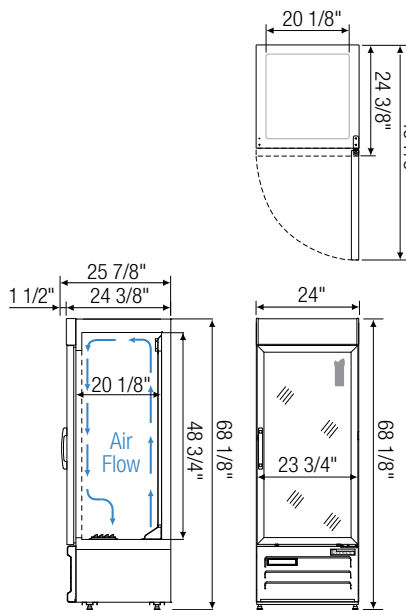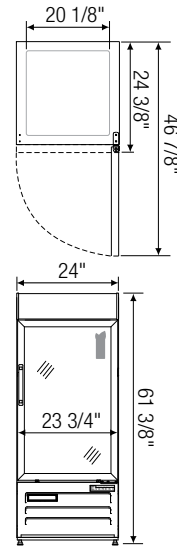

▲ EMGR10(B)

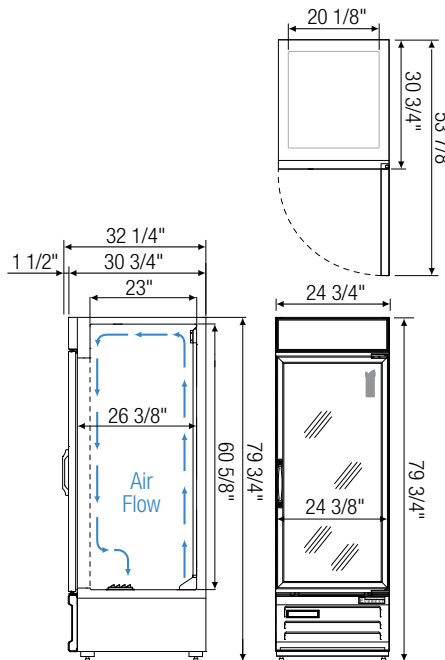

▲ EMGR20

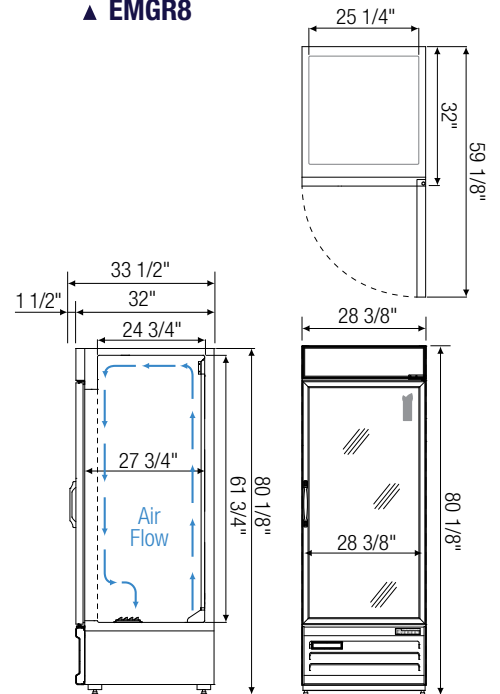

▲ EMGR24(B)

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Capacity 20 oz. Bottles	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D*	H
EMGR5	Ref	1 (swing)	5	1/5	60	R290	2	115-60-1	2	192	25	24 3/4	36
EMGR8	Ref	1 (swing)	8	1/4+	90	R290	2	115-60-1	2.3	205	24	24 3/8	61 3/8
EMGR10(B)	Ref	1 (swing)	10	1/4+	120	R290	3	115-60-1	2.3	245	24	24 3/8	68 1/8
EMGR20	Ref	1 (swing)	20	1/4+	150	R290	4	115-60-1	2.5	314	24 3/4	30 3/4	79 3/4
EMGR24(B)	Ref	1 (swing)	25	1/3	165	R290	4	115-60-1	2.5	334	28 3/8	32	80 1/8

*: Exterior depth dimension does not include 1-1/2" for door handles.

Da, Db : Interior Depth

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated
Energy Efficiency information.

GLASS DOOR MERCHANDISER REFRIGERATORS

Multiple Swing Doors

EM - Series • EMSGR33 • EMSGR48 • EMSGR69



▲ EMSGR33



▲ EMSGR48



▲ EMSGR69

Cabinet Construction

- Heavy duty white coated steel interior / exterior.
- Stainless steel floor interior has rounded corners and detachable drain plug for ease of cleaning.
- 2.5" thick high density polyurethane insulation.
- Four height adjustable screw legs (six legs for model EMGR69).

Refrigeration System

- Bottom mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal distribution of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Black PVC door frames.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.

Shelving

- Four epoxy coated, steel wire shelves with airflow guard per section.
- Height adjustable stainless steel clips.

Temperature Control




- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options



- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions

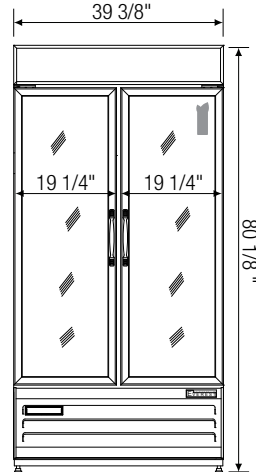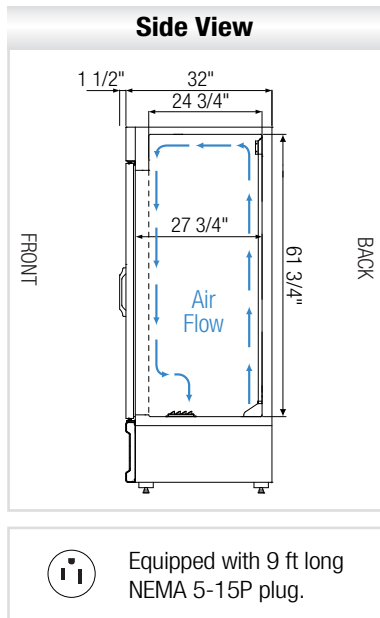


▲ EMSGR33

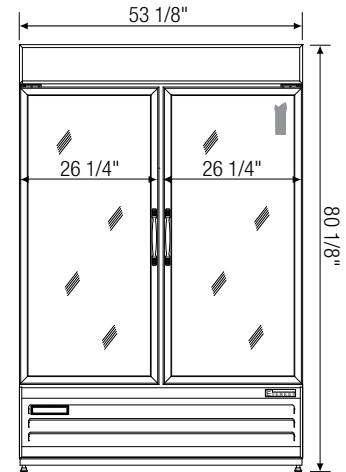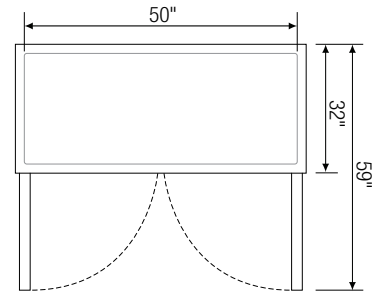

▲ EMSGR48

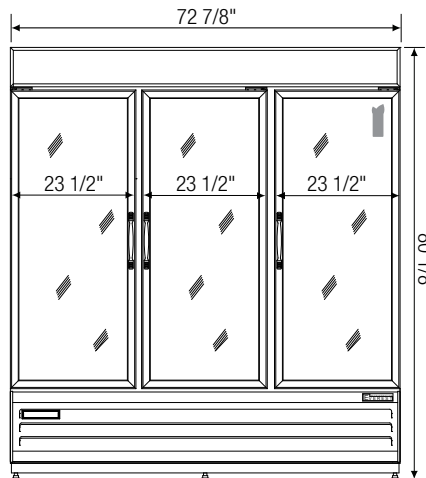

▲ EMSGR69

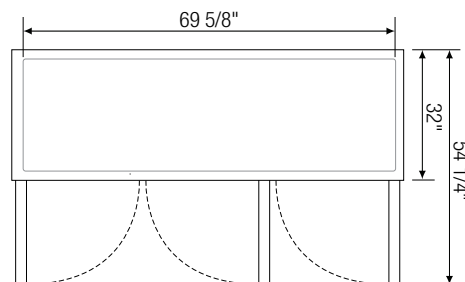

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Capacity 20 oz. Bottles	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D*	H
EMSGR33	Ref	2 (swing)	36	1/3	336	R290	8	115-60-1	2.5	433	39 3/8	32	80 1/8
EMSGR48	Ref	2 (swing)	50	1/2	448	R290	8	115-60-1	5.5	522	53 1/8	32	80 1/8
EMSGR69	Ref	3 (swing)	71	3/4	672	R290	12	115-60-1	7	697	72 7/8	32	80 1/8

★: Exterior depth dimension does not include 1-1/2" for door handles.

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

GLASS DOOR MERCHANDISER REFRIGERATORS

Sliding Doors

EM - Series • EMGR33(B) • EMGR48(B) • EMGR69(B)



▲ EMGR33



▲ EMGR33B



▲ EMGR48



▲ EMGR48B



▲ EMGR69



▲ EMGR69B

Cabinet Construction

- Heavy duty white coated steel interior / exterior. Black exterior standard for models EMGR33B, EMGR48B and EMGR69B.
- Stainless steel floor interior has rounded corners and detachable drain plug for ease of cleaning.
- 2.5" thick high density polyurethane insulation.
- Four height adjustable screw legs (six legs for models EMGR69 and EMGR69B).

Refrigeration System

- Bottom mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal distribution of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Black PVC door frames.
- Self-closing with heavy duty door bumpers for impact absorption.
- Removable doors and stainless steel door tracks make cleaning an easy process.

Shelving

- Four epoxy coated, steel wire shelves with airflow guard per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


Option

- Additional shelving.
- 5" or 3" swivel casters with locks on front set.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions



Side View

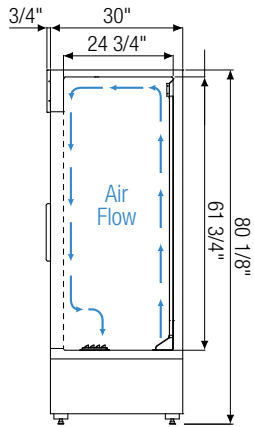



Equipped with 9 ft long
NEMA 5-15P plug.

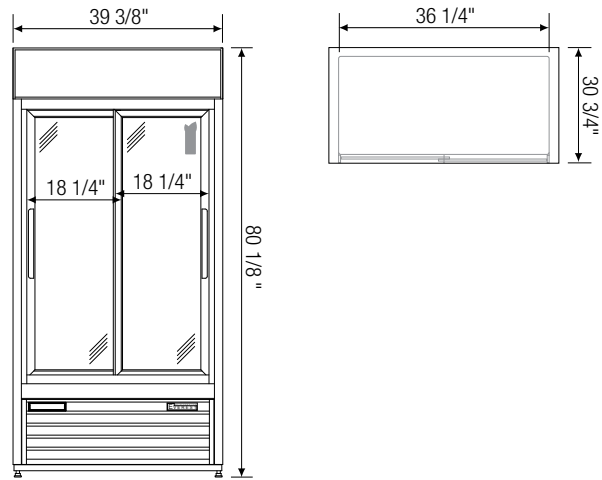

▲ EMGR33(B)

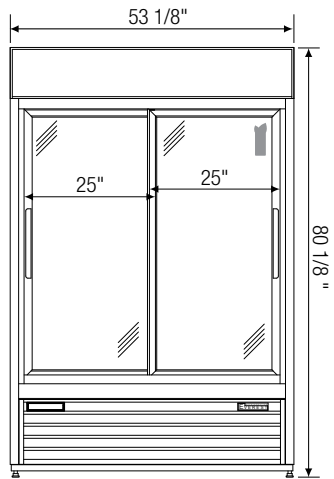

▲ EMGR48(B)

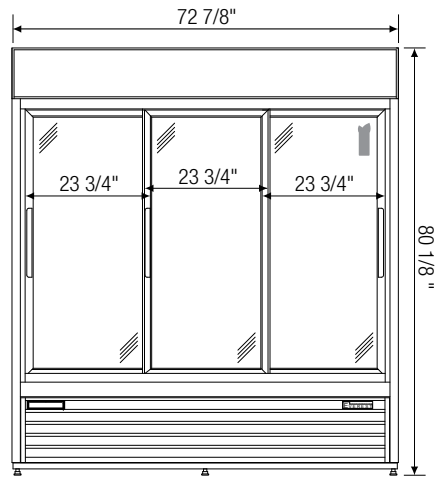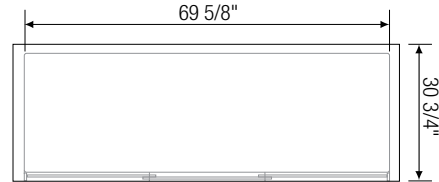

▲ EMGR69(B)

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Capacity 20 oz. Bottles	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H
EMGR33(B)	Ref	2 (sliding)	33	1/3	336	R290	8	115-60-1	2.5	416	39 3/8	30 3/4	80 1/8
EMGR48(B)	Ref	2 (sliding)	48	1/2	448	R290	8	115-60-1	5.5	533	53 1/8	30 3/4	80 1/8
EMGR69(B)	Ref	3 (sliding)	69	3/4	672	R290	12	115-60-1	7	684	72 7/8	30 3/4	80 1/8

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated
Energy Efficiency information.

GLASS DOOR MERCHANDISER REFRIGERATORS (STAINLESS STEEL)

Sliding Doors

EM - Series • EMGR33-SS • EMGR48-SS



▲ EMGR33-SS



▲ EMGR48-SS

Cabinet Construction

- Heavy duty stainless steel exterior. All stainless steel interior suited for storage of unpackaged goods. Detachable interior drain plug for ease of cleaning.
- Galvanized steel top, bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four height adjustable screw legs.

Refrigeration System

- Bottom mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal distribution of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Gray PVC door frames.
- Self-closing with heavy duty door bumpers for impact absorption.
- Removable doors and stainless steel door tracks make cleaning an easy process.

Shelving

- Four epoxy coated, steel wire shelves with airflow guard per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


Option

- Additional shelving.
- 5" or 3" swivel casters with locks on front set.
- 3.5" – 6" height-adjustable and interchangeable legs.





Dimensions



Side View

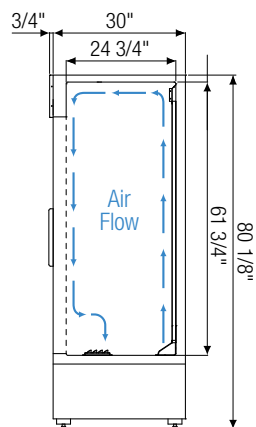

Equipped with 9 ft long NEMA 5-15P plug.

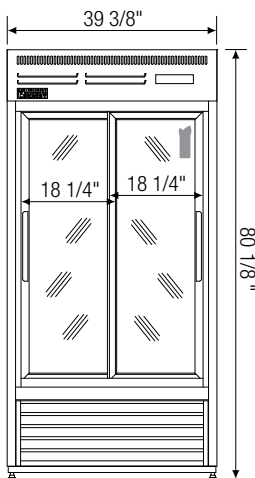

▲ EMGR33-SS

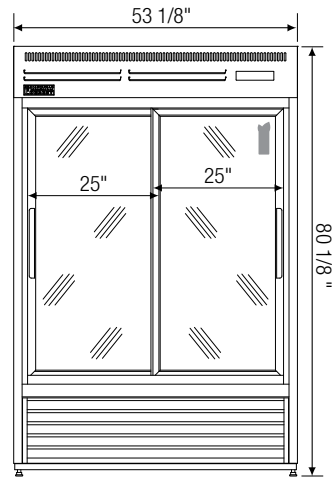

▲ EMGR48-SS

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Capacity 20 oz. Bottles	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H
EMGR33-SS	Ref	2 (sliding)	33	1/3	336	R290	8	115-60-1	2.5	416	39 3/8	30 3/4	80 1/8
EMGR48-SS	Ref	2 (sliding)	48	1/2	448	R290	8	115-60-1	5.5	533	53 1/8	30 3/4	80 1/8

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

GLASS DOOR MERCHANDISER FREEZERS

Swing Doors

EM - Series • EMGF23 • EMGF36 • EMGF48 • EMGF69



▲ EMGF23

▲ EMGF36

▲ EMGF48

▲ EMGF69

Cabinet Construction

- Heavy duty white coated steel interior / exterior.
- Stainless steel floor interior has rounded corners and detachable drain plug for ease of cleaning.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set (six casters for model EMGF69). Leg stabilizers standard for all models.

Refrigeration System

- Bottom mounted, self-contained and retractable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- Airflow guard ensures optimal circulation of cold air. R290 models include full-length air duct system.
- Time-initiated and temperature-terminated hot gas defrost cycle saves on energy.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Removable and washable condenser coil air filter for R404A models. R290 models do not require condenser coil air filters.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-20P for model EMGF23. Pre-wired power cord without plug, 230V/60Hz/1Ph for models EMGF36, EMGF48 and EMGF69).

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Matte finish aluminum door frames.
- Frame heaters prevent exterior moisture build up.
- Defroster strips keep glass planes clear and fog-free.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Four epoxy coated, steel wire shelves with airflow guard per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, -4°F. Temperature setting range from -10°F to 54°F.

Option

- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (for model EMGF23).



Dimensions

ABS Legs



Additional front adjustable stainless steel clad ABS legs to provide extra stability when opening and closing doors.

✓: Vacuum Relief Mechanism




The vacuum relief valve equalizes cabinet pressure for rapid door re-entry.




Equipped with 9 ft long NEMA 5-20P plug. (model EMGF23)

Side View

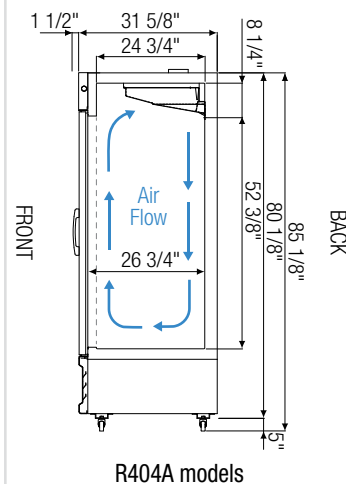


R404A models


Side View

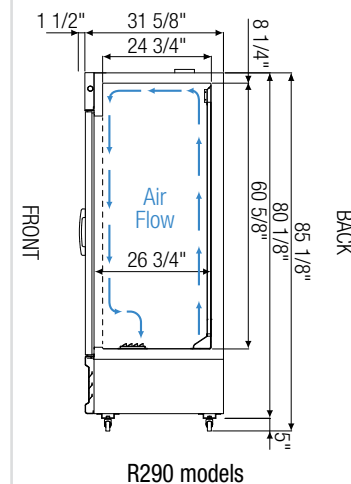


R290 models




▲ EMGF23



▲ EMGF36



▲ EMGF48

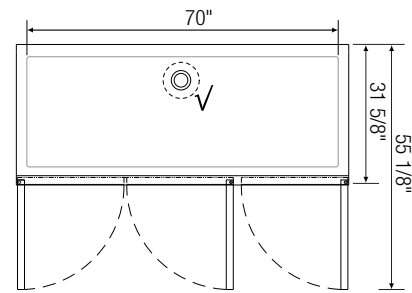

▲ EMGF69

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D ^a	H [*]
EMGF23	Frz	1	23	1	4036	R-404A / R290 [^]	4	115-60-1	11.06	450	29 1/8	31 5/8	80 1/8
EMGF36	Frz	2	36	1- 1/4	5441	R-404A / R290 [^]	8	230-60-1	5.4	592	41	31 5/8	80 1/8
EMGF48	Frz	2	48	1 x 2	4,036 x 2	R-404A / R290 [^]	8	230-60-1	8.24	771	54 3/4	31 5/8	80 1/8
EMGF69	Frz	3	69	1-1/4 x 2	5,441 x 2	R-404A / R290 [^]	12	230-60-1	11.2	1125	74 3/4	31 5/8	80 1/8

*: Height does not include 5" for casters.

†: Based on evaporating temperature of -4°F (-20°C) & condensing temperature of 131°F (55°C).

a: Exterior depth dimension does not include 1-1/2" for door handles.

^: Contact factory for R290 information.

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Frz = Freezer



Please visit our website for updated Energy Efficiency information.

Chromatography Refrigerators

EM Series

Reference Model: EMGR24C

Everest's Chromatography Refrigerators are built for general-purpose application in laboratory settings. These products feature an adjustable temperature range of 21°F to 48°F. Standard features include side wall access ports with water-proof, heavy duty, lockable receptacle covers, low emissivity glass doors, an internal duplex GFCI outlet with a water-proof, heavy duty, expandable receptacle cover and electrical cords, pre-wired and ready to plug.

1: Digital Control

Multi-function with easy to read LED display.



2: Double Pane Glass

Low emissivity and UV reflective to help regulate cabinet temperature.

3: Self-Closing Mechanism

Adjustable torsion system for swing doors. Angled tracks for sliding doors.

4: Die Cast Door Handle

High strength, die cast door handles.

5: Access Ports

Each side wall has ports for running lines or cords. Includes heavy duty covers with lockable tabs.

6: Interior GFCI Electrical Outlet

Provides power to stirring devices and other equipment. Includes water proof cover.

7: Epoxy Coated Shelves

Durable, steel wire shelves with built-in airflow guards.

8: Adjustable Screw Legs

Optional 5" or 3" swivel caster or height-adjustable leg replacements also available.

● Exterior ○ Interior



Blizzard R290 Condensing Unit

Bottom mounted, self-contained, fully detachable and uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

Audible Overheat Protection Alarm

Keeps compressor and condenser coil from overheating.

Self-Maintaining Condensate Pan


Energy efficient and requires no external drains or electric heaters.

ECM Evaporator Fan Motor

Electronically Commutated. Achieves rapid cooling with less energy.

ECM Condenser Fan Motor

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

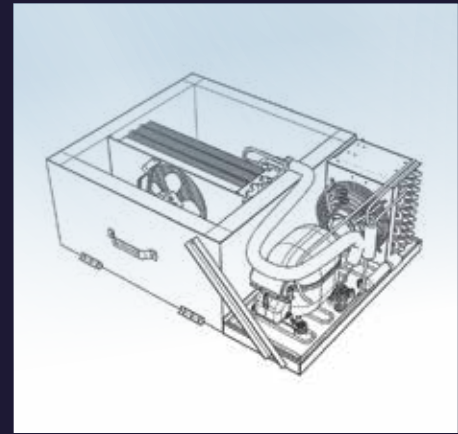

9: Full Length Air Duct

Ensures optimal distribution of cold air.

10: Energy Efficient LED

Provides bright, high color illumination at lower heat output. Equipped with on/off switch.

11: Detachable Drain Plug




Removes for ease of cleaning.

12: Ridge-Lined Door Gaskets

Keeps air tight seal and promotes smooth cabinet re-entry. Snap-in for easy cleaning and replacement.

14: Thick Insulation

2.5" thick high density polyurethane insulation ensures temperature stability and conserves energy.



CHROMATOGRAPHY REFRIGERATORS

Swing Doors

EM - Series • EMGR24C • EMSGR33C • EMSGR48C • EMSGR69C



▲ EMGR24C



▲ EMSGR33C



▲ EMSGR48C



▲ EMSGR69C

Cabinet Construction

- Heavy duty white coated steel interior / exterior.
- Stainless steel floor interior has rounded corners and detachable drain plug for ease of cleaning.
- 2.5" thick high density polyurethane insulation.
- Four height adjustable screw legs (six legs for model EMSGR69C).

Refrigeration System

- Bottom mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal distribution of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Black PVC door frames.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.

Shelving

- Four epoxy coated, steel wire shelves with airflow guard per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Chromatography Features

- Two access ports (one on each side wall) for running lines or cords. Includes heavy duty covers with lockable tabs.
- Duplex GFCI electrical outlet inside cabinet interior provides power for stirring devices and other equipment. Includes water proof cover.

Options



- Additional shelving.
- 5" or 3" swivel casters with locks on front set.
- 3.5" – 6" height-adjustable and interchangeable legs.







5 YEAR Compressor
3 YEAR Parts & Labor

Dimensions


Side View

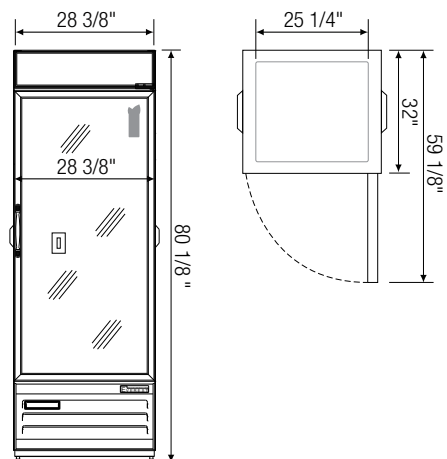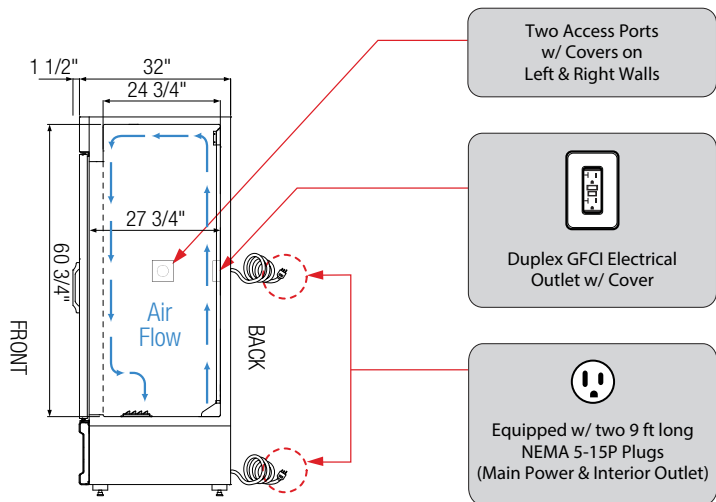


▲ EMGR24C

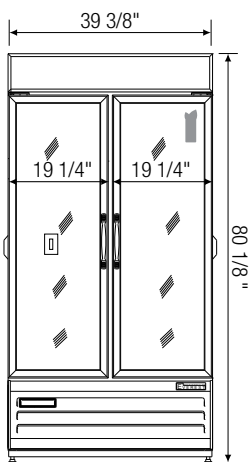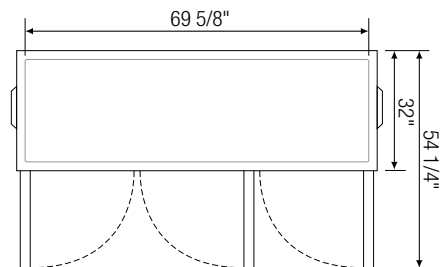

▲ EMSGR33C

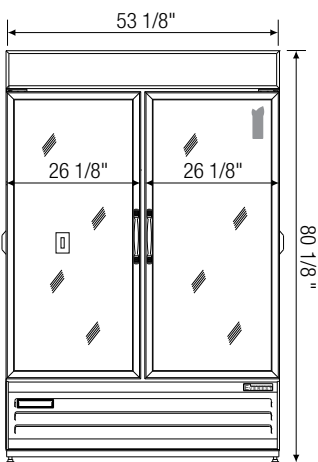

▲ EMSGR48C

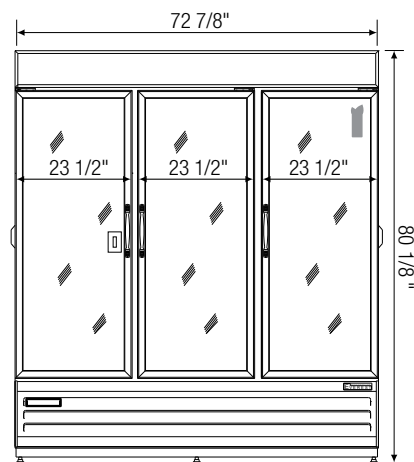

▲ EMSGR69C

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L ^a	D [*]	H
EMGR24C	Ref	1 (swing)	25	1/3	2,311	R290	4	115-60-1	2.5	334	28 3/8	32	80 1/8
EMSGR33C	Ref	2 (swing)	36	1/3	2,311	R290	8	115-60-1	2.5	435	39 3/8	32	80 1/8
EMSGR48C	Ref	2 (swing)	50	1/2	3,563	R290	8	115-60-1	5.5	524	53 1/8	32	80 1/8
EMSGR69C	Ref	3 (swing)	71	3/4	4,445	R290	12	115-60-1	7	700	72 7/8	32	80 1/8

★: Exterior depth of swing door units does not include 1 1/2" for door handles.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a: Exterior length does not include protruding access ports.

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator



Please visit our website for updated Energy Efficiency information.

CHROMATOGRAPHY REFRIGERATORS

Sliding Doors

EM - Series • EMGR33C • EMGR48C • EMGR69C



▲ EMGR33C



▲ EMGR48C



▲ EMGR69C

Cabinet Construction

- Heavy duty white coated steel interior / exterior.
- Stainless steel floor interior has rounded corners and detachable drain plug for ease of cleaning.
- 2.5" thick high density polyurethane insulation.
- Four height adjustable screw legs (six legs for models EMGR69C).

Refrigeration System

- Bottom mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal distribution of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Black PVC door frames.
- Self-closing with heavy duty door bumpers for impact absorption.
- Removable doors and stainless steel door tracks make cleaning an easy process.

Shelving

- Four epoxy coated, steel wire shelves with airflow guard per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.



Chromatography Features

- Two access ports (one on each side wall) for running lines or cords. Includes heavy duty covers with lockable tabs.
- Duplex GFCI electrical outlet inside cabinet interior provides power for stirring devices and other equipment. Includes water proof cover.


Options

- Additional shelving.
- 5" or 3" swivel casters with locks on front set.
- 3.5" – 6" height-adjustable and interchangeable legs.


Dimensions

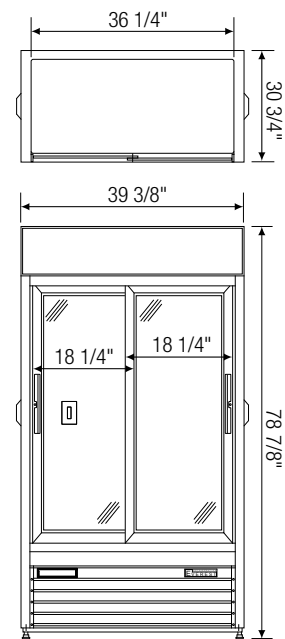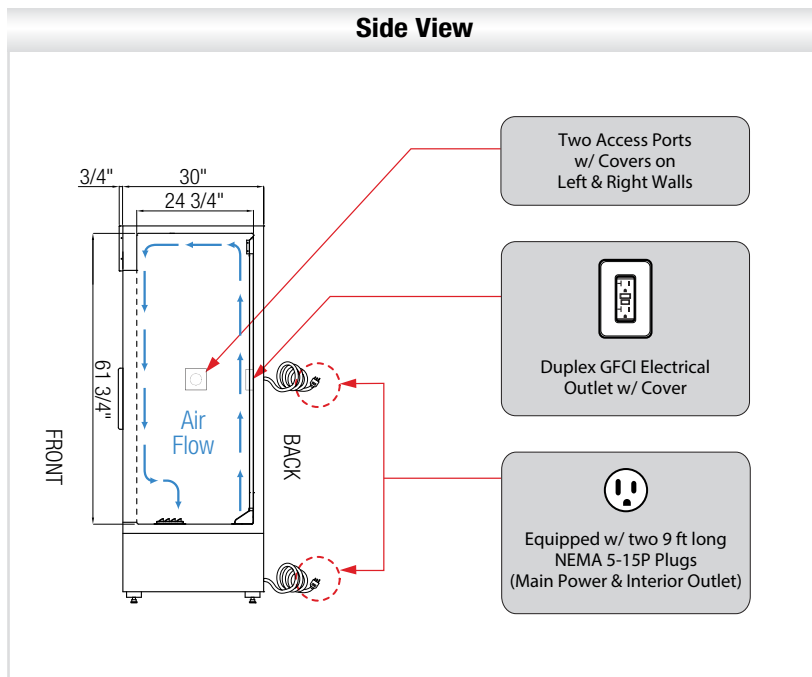

▲ EMGR33C

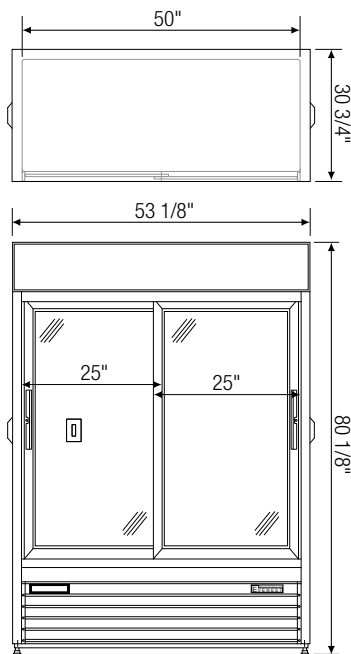

▲ EMGR48C

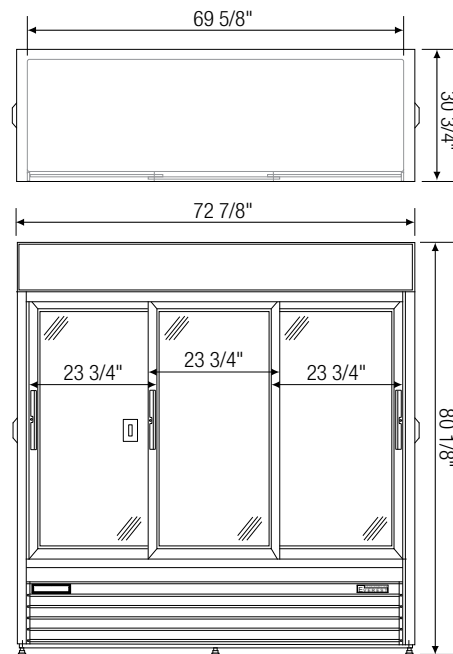

▲ EMGR69C

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L [*]	D	H
EMGR33C	Ref	2 (sliding)	33	1/3	2,311	R290	8	115-60-1	2.5	418	39 3/8	30 3/4	80 1/8
EMGR48C	Ref	2 (sliding)	48	1/2	3,563	R290	8	115-60-1	5.5	535	53 1/8	30 3/4	80 1/8
EMGR69C	Ref	3 (sliding)	69	3/4	4,445	R290	12	115-60-1	7	687	72 7/8	30 3/4	80 1/8

*: Exterior length does not include protruding access ports.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.




Please visit our website for updated
Energy Efficiency information.

Standard Features & Benefits


Chromatography Refrigerators

Chromatography Refrigerators are built for general-purpose application in laboratory settings. Standard features include low emissivity, UV reflective double pane glass doors and a multi-function digital controller with a temperature range of 33°F to 54°F. Chromatography features include two covered access ports and a covered electrical outlet in the cabinet interior.

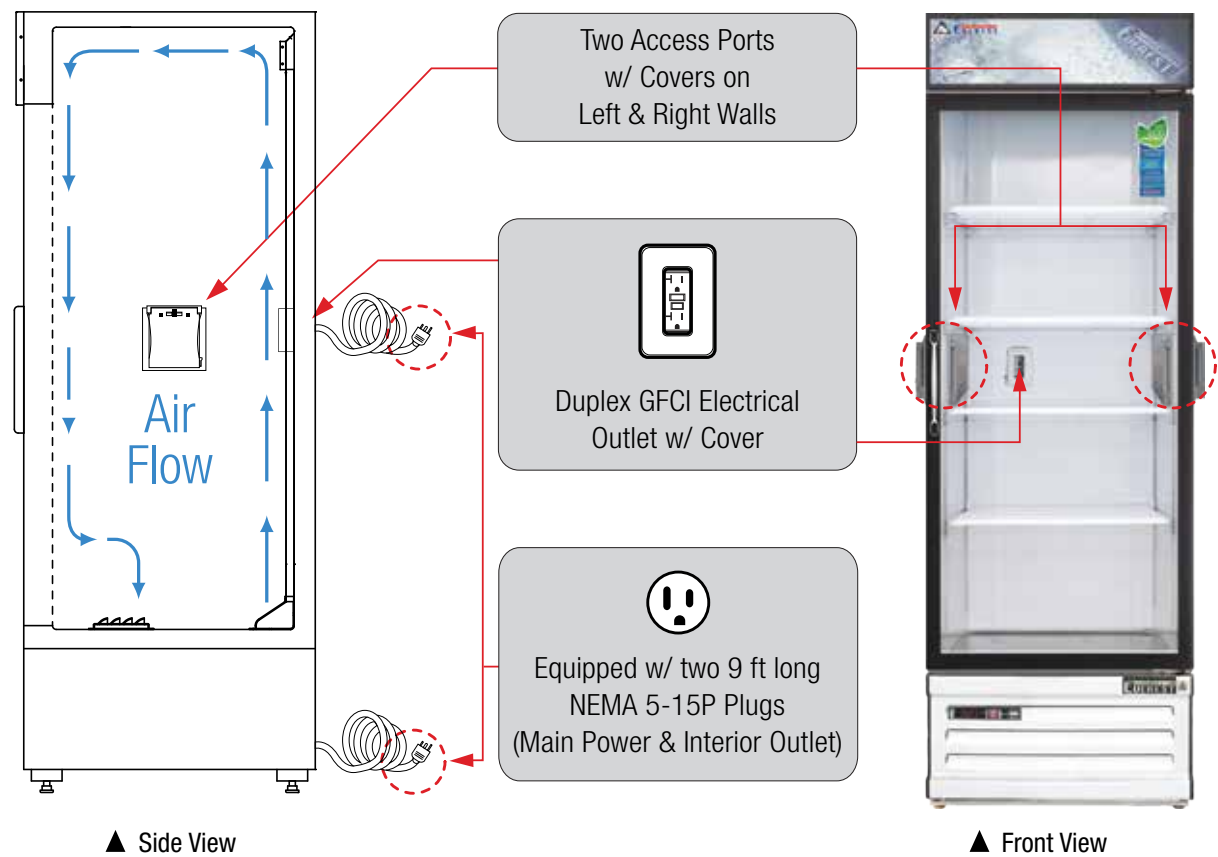


Covered Access Ports

Two access ports are located on each side wall of the unit for running lines or cords into the cabinet. The ports come with heavy duty swing covers with lockable tabs.




Covered Duplex GFCI Electrical

One electrical outlet inside the cabinet interior provides power for mixing devices and other equipment. The outlet comes with a heavy duty, water-proof and expandable swing cover.



NEMA 5-15P Plugs

Two 9 ft long electrical cords for the main power and interior outlet are pre-wired and ready to plug.

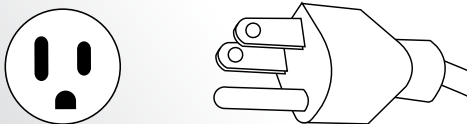

Undercounters

Back Mounted Condensing Unit - *ETB Series*

Reference Model: ETBR2

The Undercounter Back Mount series is designed to be flexible in function. Its height is matched to standard countertop dimensions so it can slide under the designated space with ease. Its heavy duty, single piece stainless steel worktop provides a practical work space or storage area.



Exterior



Interior

1: Digital Control

Multi-function with easy to read LED display.



2: Recessed Door Handle

Heavy duty with high traction surface.

3: Pre-Installed Door Locks

Provides security options for any situation.

4: Heavy Duty Swivel Casters

Standard 5" with locks on front set. Optional 3" swivel caster or height-adjustable leg replacements also available.

5: Front Breathing Vents

Draw and release air through the front grill for flexibility in installation.



Blizzard R290 Condensing Unit

Back mounted, self-contained, fully detachable and uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

Audible Overheat Protection Alarm

Keeps compressor and condenser coil from overheating.

Self-Maintaining Condensate Pan


Energy efficient and requires no external drains or electric heaters.

ECM Evaporator Fan Motor

Electronically Commutated. Achieves rapid cooling with less energy.

ECM Condenser Fan Motor

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

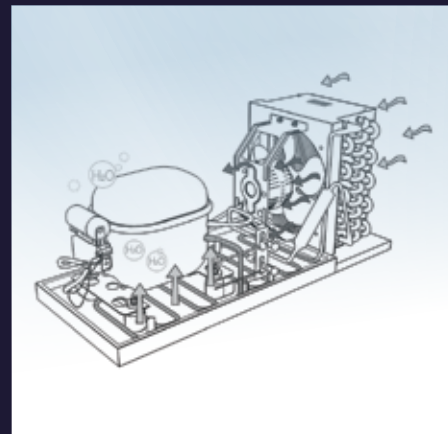

6: Full Length Air Duct

Ensures optimal distribution of cold air.

7: Rear Bumpers

Keeps a safe distance between the wall and the unit to prevent ventilation obstruction.

8: Vacuum Relief U-Trap

Keeps hot air from entering the cabinet interior and helps relieve cabinet pressure.

9: Ridge-Lined Door Gaskets

Keeps air tight seal and promotes smooth cabinet re-entry. Snap-in for easy cleaning and replacement.

10: Stainless Steel Interior & Exterior

High quality with rounded corners for a hazard-free workspace.

11: Air Tight Seal




Self-closing door with adjustable torsion system ensures a positive seal.

12: Optional Backsplash

Protects from messy spills on the worktop.

13: Thick Insulation

2.5" thick high density polyurethane insulation ensures temperature stability and conserves energy.



BACK MOUNT UNDERCOUNTER REFRIGERATORS

Back Mounted Condensing Unit

ETB - Series • ETBR1 • ETBSR2 • ETBR2 • ETBWR2 • ETBR3



▲ ETBR1



▲ ETBSR2



▲ ETBR2



▲ ETBWR2



▲ ETBR3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Front air breathing for flexibility in installation.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two one epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.



Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


Options

- 4" high stainless steel backsplash for worktop application.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (applies to model ETBR1).


Dimensions

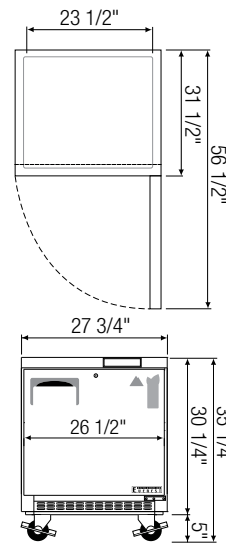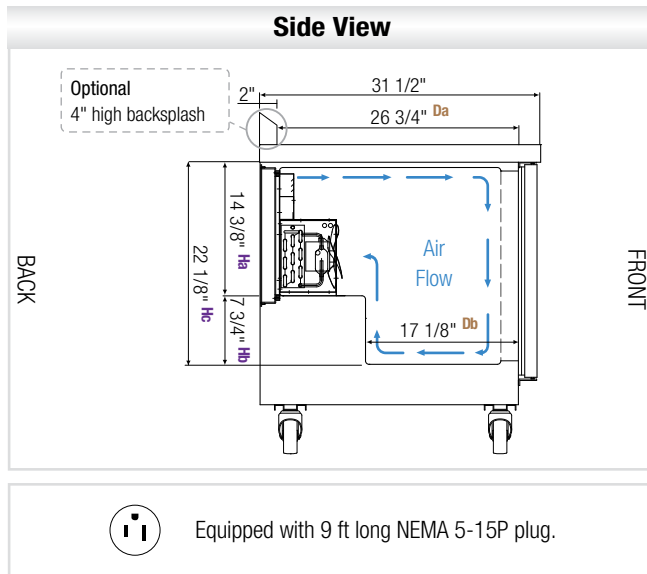


▲ ETBR1

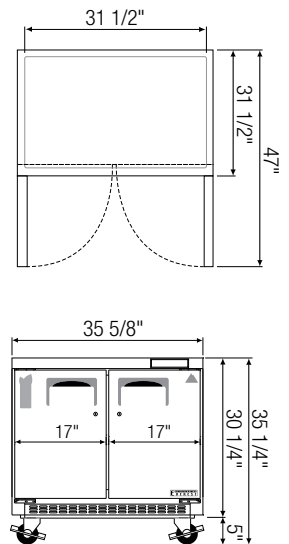


▲ ETBSR2

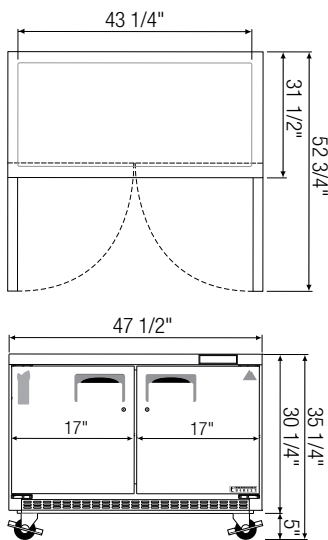

▲ ETBR2

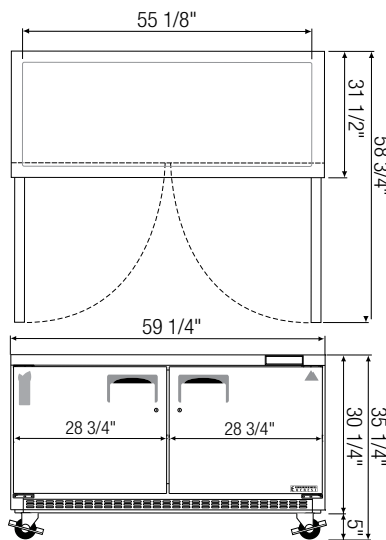

▲ ETBWR2

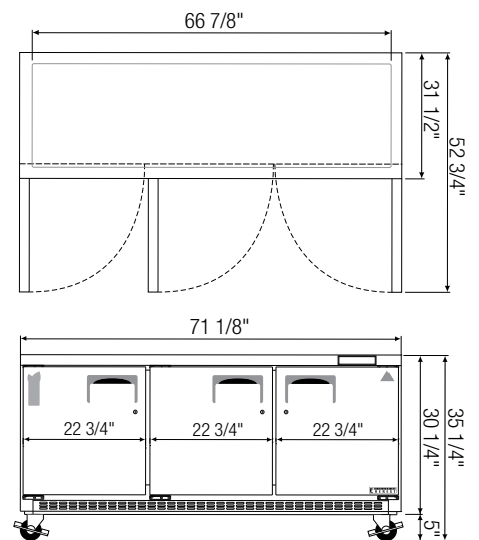

▲ ETBR3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
ETBR1	Ref	1	7.5	1/5	1,655	R290	2	115-60-1	2.7	184	27 3/4	31 1/2	30 1/4
ETBSR2	Ref	2	10	1/5	1,655	R290	4	115-60-1	2.7	216	35 5/8	31 1/2	30 1/4
ETBR2	Ref	2	14	1/5	1,655	R290	4	115-60-1	2.7	256	47 1/2	31 1/2	30 1/4
ETBWR2	Ref	2	18	1/4+	1,926	R290	4	115-60-1	3.7	306	59 1/4	31 1/2	30 1/4
ETBR3	Ref	3	22	1/3	2,311	R290	6	115-60-1	2.7	359	71 1/8	31 1/2	30 1/4

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Da, Db : Interior Depth *Ha, Hb, Hc* : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator



Please visit our website for updated
Energy Efficiency information.

DRAWERED UNDERCOUNTER REFRIGERATORS

Back Mounted Condensing Unit

ETB - Series • ETBR1-D2 • ETBSR2-D2 • ETBR2-D4 • ETBWR2-D4 • ETBR3-D2



▲ ETBR1-D2



▲ ETBSR2-D2



▲ ETBR2-D4



▲ ETBWR2-D4



▲ ETBR3-D2

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Front air breathing for flexibility in installation.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Doors & Drawers

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Thick gauge, stainless steel drawer frames with low-friction ball bearings.
- Self-closing door with adjustable torsion system for a positive seal.
- Snap-in magnetic door and drawer gaskets make cleaning and replacement an easy process.
- High strength, recessed door and drawer handles.

Shelving

- Two epoxy coated, steel wire shelves (applies to model ETBR3-D2).
- Height adjustable stainless steel clips.

Temperature Control




- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- 4" high stainless steel backsplash for worktop application.
- Additional shelving (applies to model ETBR3-D2).
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

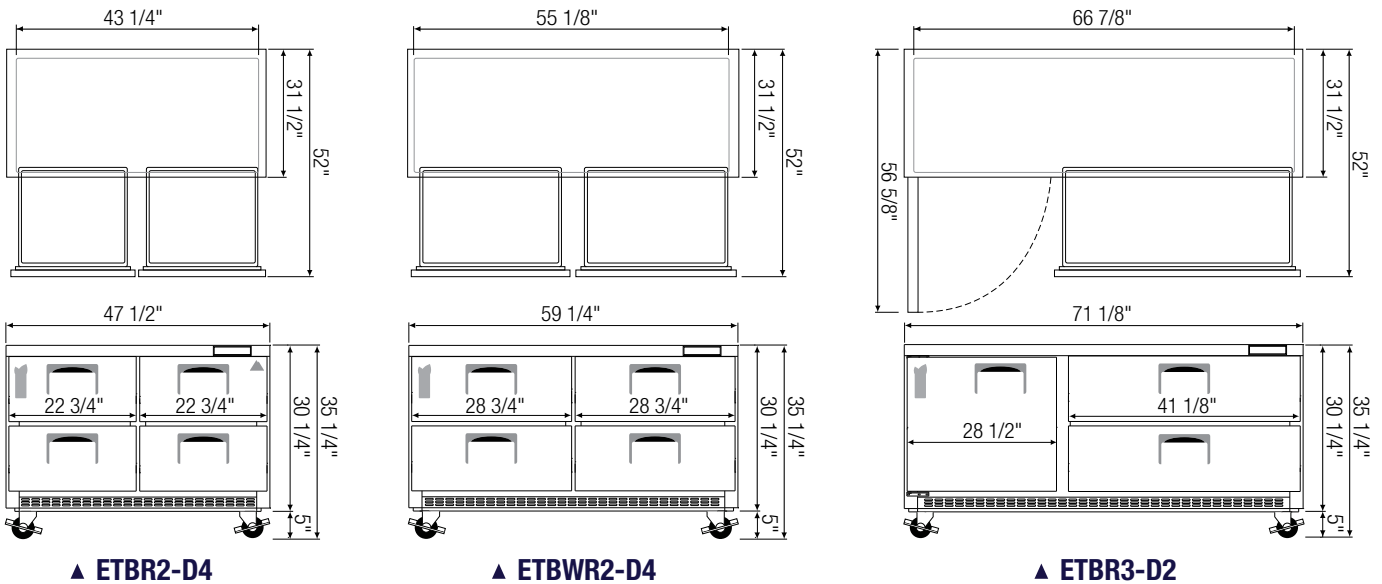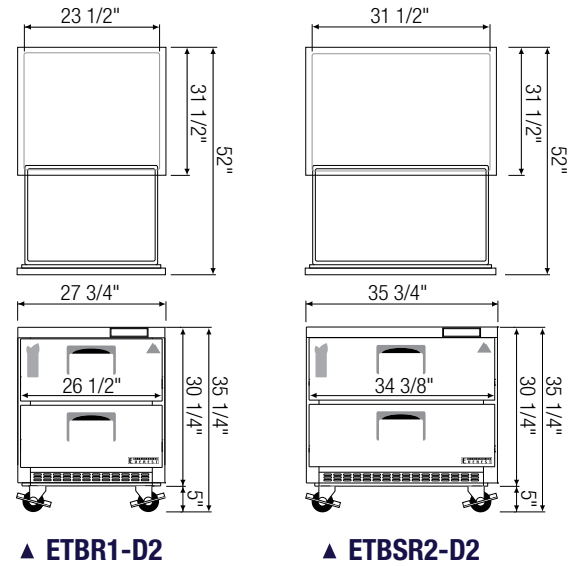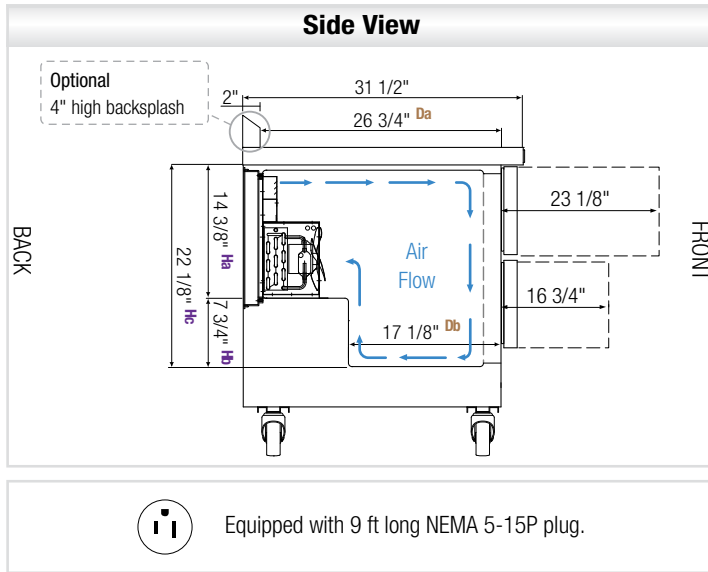

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	# of ^a Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
												L	D	H*
ETBR1-D2	Ref	2(DR)	7.5	1/5	1655	R290	N/A	1/2 x 4 1/4 x 2	115-60-1	2.7	204	27 3/4	31 1/2	30 1/4
ETBSR2-D2	Ref	2(DR)	10	1/5	1655	R290	N/A	1/2x4, 1/3x1 1/4x2, 1/6x1	115-60-1	2.7	235	35 5/8	31 1/2	30 1/4
ETBR2-D4	Ref	4(DR)	14	1/5	1655	R290	N/A	1/2x4, 1/3x4 1/4x2, 1/6x2	115-60-1	2.7	299	47 1/2	31 1/2	30 1/4
ETBWR2-D4	Ref	4(DR)	18	1/4+	1926	R290	N/A	1/2x4, 1/3x8 1/4x2, 1/6x4	115-60-1	3.7	349	59 1/4	31 1/2	30 1/4
ETBR3-D2	Ref	1(D) 2(DR)	22	1/3	2311	R290	2	1/2x2, 1/3x8 1/4x1, 1/6x4	115-60-1	2.7	374	71 1/8	31 1/2	30 1/4

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a: Drawer pans are not included.

Da, Db: Interior Depth Ha, Hb, Hc: Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator | (D) = Door | (DR) = Drawer



Please visit our website for updated
Energy Efficiency information.

BACK MOUNT UNDERCOUNTER FREEZERS

Back Mounted Condensing Unit

ETB - Series • ETBF1 • ETBSF2 • ETBF2 • ETBW2 • ETBF3



▲ ETBF1



▲ ETBSF2



▲ ETBF2



▲ ETBW2



▲ ETBF3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Bottom mounted, self-contained and retractable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- Front air breathing for flexibility in installation.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- R290 models include full-length air duct system.
- Time-initiated and temperature-terminated defrost cycle with defrost heater.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control



- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, -4°F. Temperature setting range from -10°F to 54°F.
- R290 models include audible overheat protection alarm for compressor and condenser coil.

Options


- 4" high stainless steel backsplash for worktop application.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (applies to model ETBF1).




Dimensions

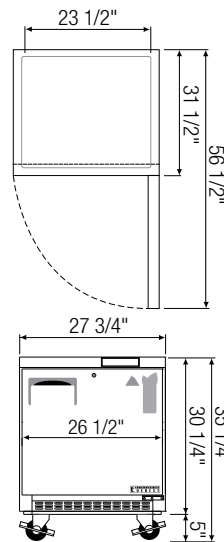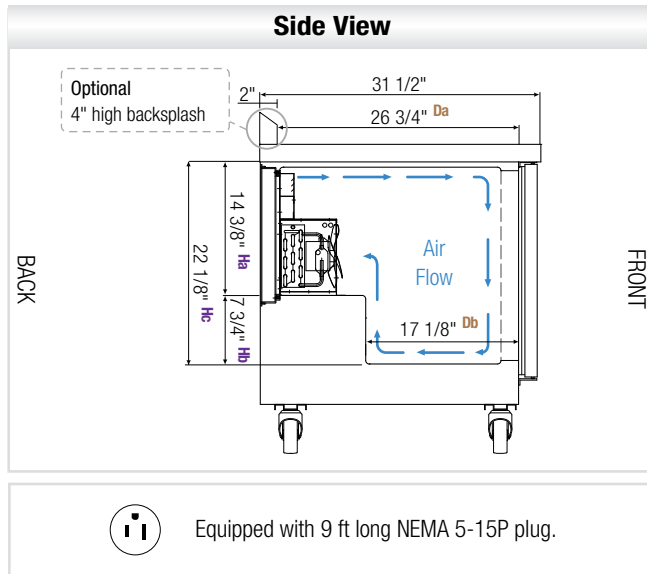


▲ ETBF1

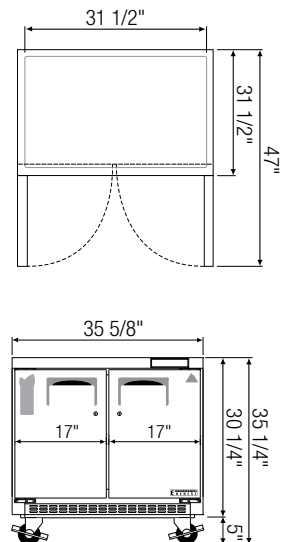


▲ ETBSF2

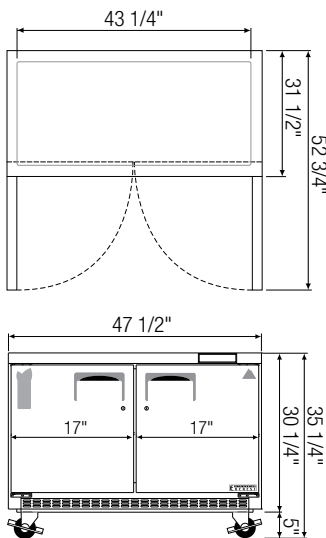

▲ ETBF2

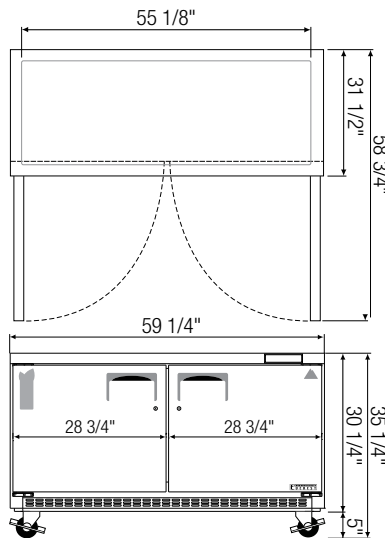

▲ ETBWF2

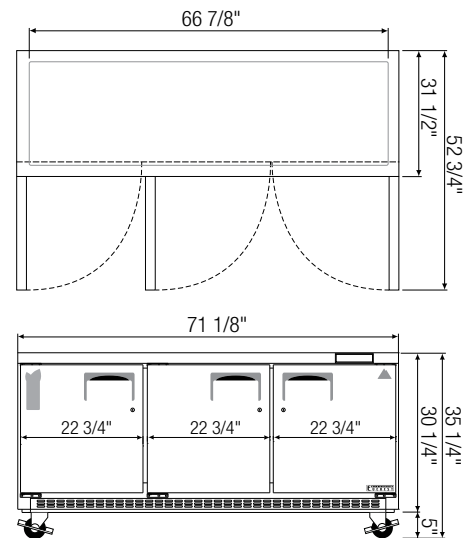

▲ ETBF3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
ETBF1	Frz	1	7.5	1/3	1,360	R290	2	115-60-1	3	195	27 3/4	31 1/2	30 1/4
ETBSF2	Frz	2	10	1/3	1,360	R290	4	115-60-1	3	231	35 5/8	31 1/2	30 1/4
ETBF2	Frz	2	14	1/3	1,360	R290	4	115-60-1	3	269	47 1/2	31 1/2	30 1/4
ETBWF2	Frz	2	18	1/2	3,435	R-404A / R290 [^]	4	115-60-1	5	320	59 1/4	31 1/2	30 1/4
ETBF3	Frz	3	22	1/2	3,435	R-404A / R290 [^]	6	115-60-1	5	363	71 1/8	31 1/2	30 1/4

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

[^]: Contact factory for R290 information.

Da, Db : Interior Depth Ha, Hb, Hc : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Frz = Freezer



Please visit our website for updated Energy Efficiency information.

Undercounters

Side Mounted Condensing Unit - *ET & ETG Series*

Reference Model: ETR2

The Undercounter Side Mount series comes with the multi-functional advantages of the back mount line with added features to enhance user experience. It comes with a robust digital display and control system for precise temperature management.

● Exterior ○ Interior

1: Digital Control

Multi-function with easy to read LED display.



2: Recessed Door Handle*

Heavy duty with high traction surface.

3: Pre-Installed Door Locks*

Provides security options for any situation.

4: Heavy Duty Swivel Casters

Standard 5" with locks on front set. Optional 3" swivel caster or height-adjustable leg replacements also available.



Blizzard R290 Condensing Unit*

Side mounted, self-contained, fully detachable and uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

Audible Overheat Protection Alarm

Keeps compressor and condenser coil from overheating.

Self-Maintaining Condensate Pan


Energy efficient and requires no external drains or electric heaters.

ECM Evaporator Fan Motor

Electronically Commutated. Achieves rapid cooling with less energy.

ECM Condenser Fan Motor

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

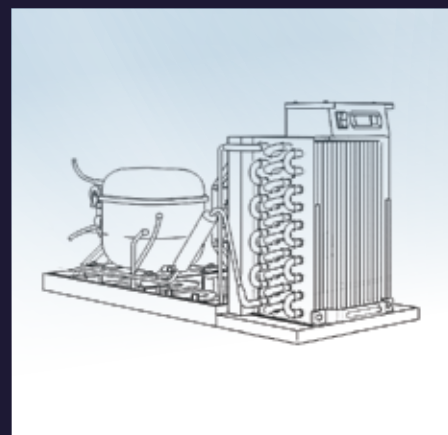

5: Full Length Air Duct

Ensures optimal distribution of cold air.

6: Rear Bumpers

Keeps a safe distance between the wall and the unit to prevent ventilation obstruction.

7: Optional Backsplash

Protects from messy spills on the worktop.

8: Vacuum Relief U-Trap

Keeps hot air from entering the cabinet interior and helps relieve cabinet pressure.

9: Ridge-Lined Door Gaskets

Keeps air tight seal and promotes smooth cabinet re-entry. Snap-in for easy cleaning and replacement.

10: Stainless Steel Interior & Exterior

High quality with rounded corners for a hazard-free workspace.

11: Air Tight Seal


Self-closing door with adjustable torsion system ensures a positive seal.

12: Shatter-Proof LED Lighting*

Silicone coated and energy efficient. Provides bright, high color illumination with low heat output.

13: Thick Insulation

2.5" thick high density polyurethane insulation ensures temperature stability and conserves energy.



* Applies to select models.

SIDE MOUNT UNDERCOUNTER REFRIGERATORS

Side Mounted Condensing Unit

ET - Series • ETR1 • ETR2 • ETWR2 • ETR3



▲ ETR1



▲ ETR2



▲ ETWR2



▲ ETR3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control


- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- 4" high stainless steel backsplash for worktop application.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Dimensions

Air Flow





Front view of cabinet interior demonstrates air circulation from left to right.




Equipped with 9 ft long NEMA 5-15P plug.


Side View

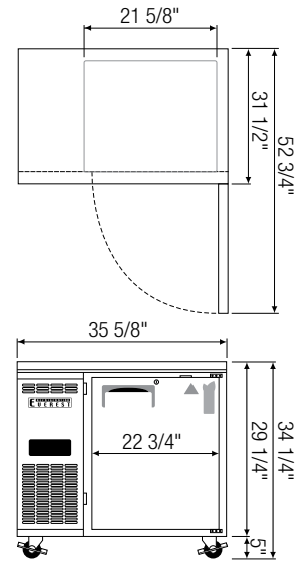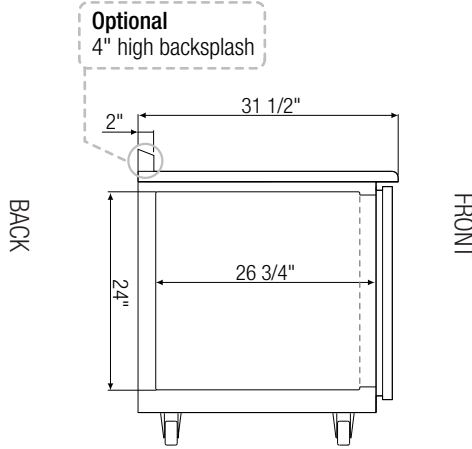


▲ ETR1

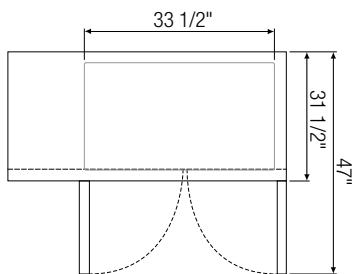




▲ ETR2

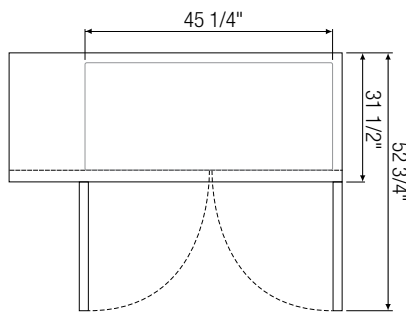

▲ ETWR2

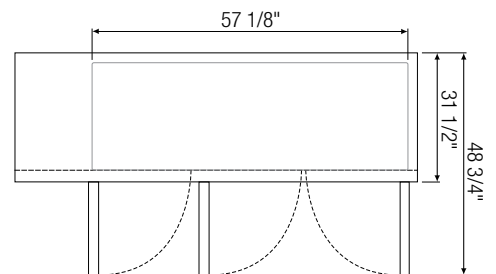

▲ ETR3

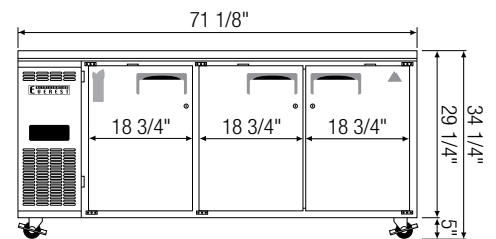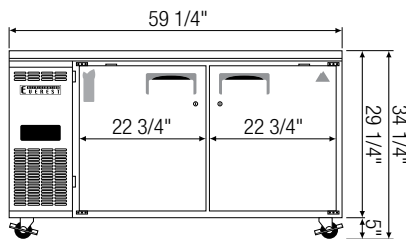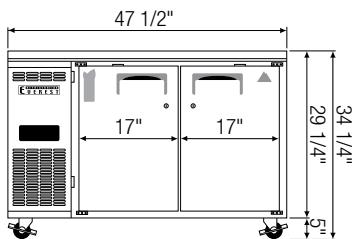

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
ETR1	Ref	1	9	1/4+	1,926	R290	2	115-60-1	3.5	210	35 3/8	31 1/2	29 1/4
ETR2	Ref	2	13	1/4+	1,926	R290	4	115-60-1	3.5	256	47 1/2	31 1/2	29 1/4
ETWR2	Ref	2	18	1/4+	1,926	R290	4	115-60-1	3.5	296	59 1/4	31 1/2	29 1/4
ETR3	Ref	3	22	1/4+	1,926	R290	6	115-60-1	3.6	343	71 1/8	31 1/2	29 1/4

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

SIDE MOUNT UNDERCOUNTER FREEZERS

Side Mounted Condensing Unit

ET - Series • ETF1 • ETF2 • ETWF2 • ETF3



▲ ETF1



▲ ETF2



▲ ETWF2



▲ ETF3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control




- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options



- 4" high stainless steel backsplash for worktop application.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.





Dimensions

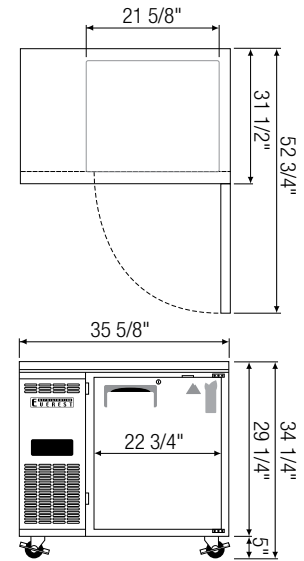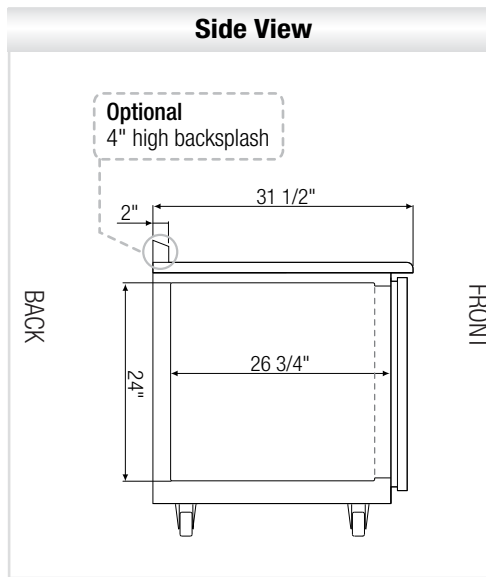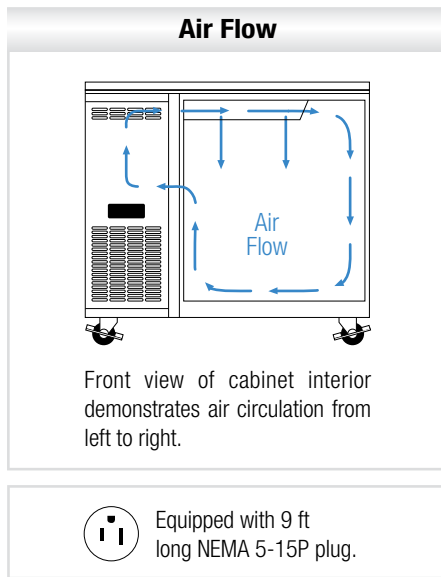



▲ ETF1

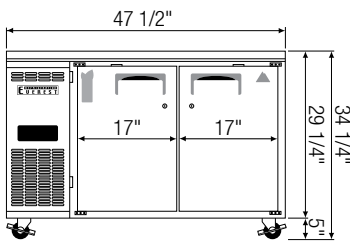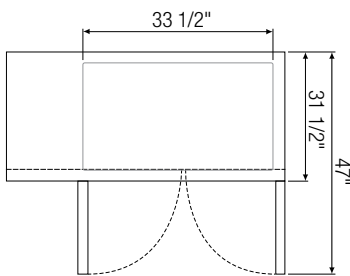

▲ ETF2

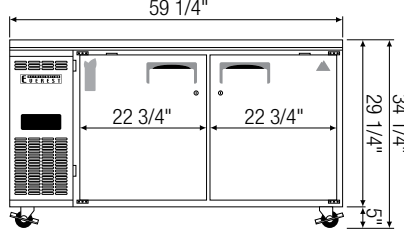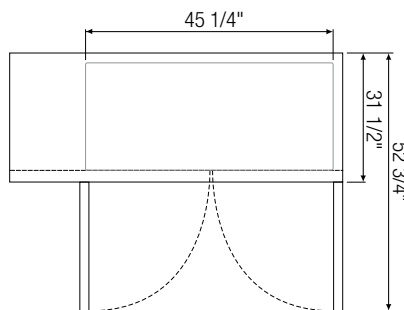

▲ ETWF2

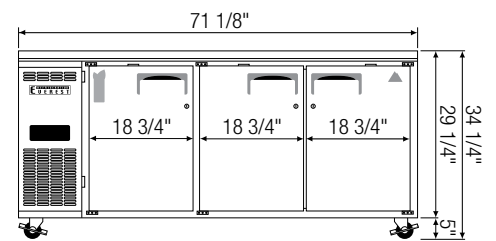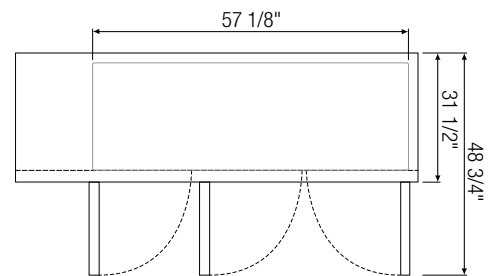

▲ ETF3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	BTU/HR [†]	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H [*]
ETF1	Frz	1	9	1/3	R290	2	1,119	115-60-1	3	218	35 5/8	31 1/2	29 1/4
ETF2	Frz	2	13	1/2	R290	4	1,670	115-60-1	5	270	47 1/2	31 1/2	29 1/4
ETWF2	Frz	2	18	1/2	R290	4	1,670	115-60-1	5	306	59 1/4	31 1/2	29 1/4
ETF3	Frz	3	22	1/2	R290	6	1,670	115-60-1	5	353	71 1/8	31 1/2	29 1/4

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 14°F (-10°C) & condensing temperature of 131°F (55°C).

Frz = Freezer

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.




Please visit our website for updated Energy Efficiency information.


SIDE MOUNT UNDERCOUNTER DUAL TEMPS

Side Mounted Condensing Unit

ET - Series • ETRF2 • ETRF3

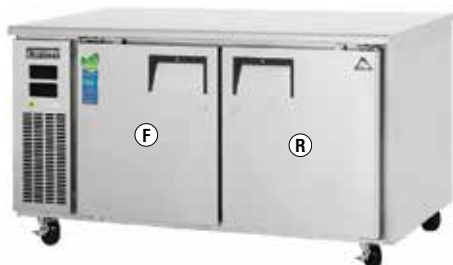

▲ ETRF2

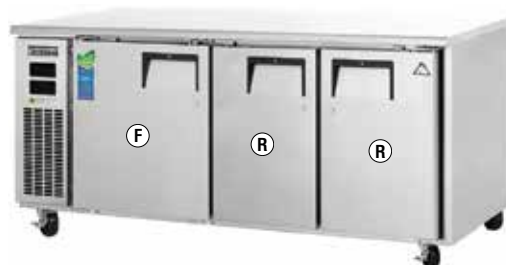

▲ ETRF3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Side mounted, self-contained and retractable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
- PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
- R290 models include full-length air duct system.
- Time-initiated and temperature-terminated auto defrost heater for freezers. Air defrost for refrigerators.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Removable and washable condenser coil air filter for R404A models. R290 models do not require condenser coil air filters.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control



- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F for refrigerators and -4°F for freezers. Temperature setting range from 33°F to 54°F for refrigerators and -10°F to 54°F for freezers.
- R290 models include audible overheat protection alarm for compressor and condenser coil.

Options


- 4" high stainless steel backsplash for worktop application.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

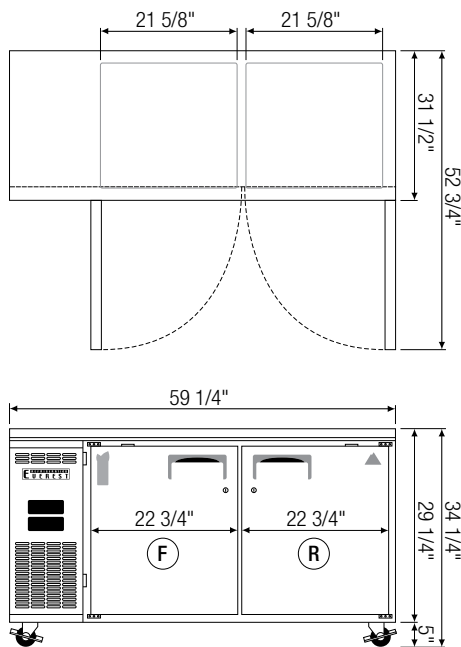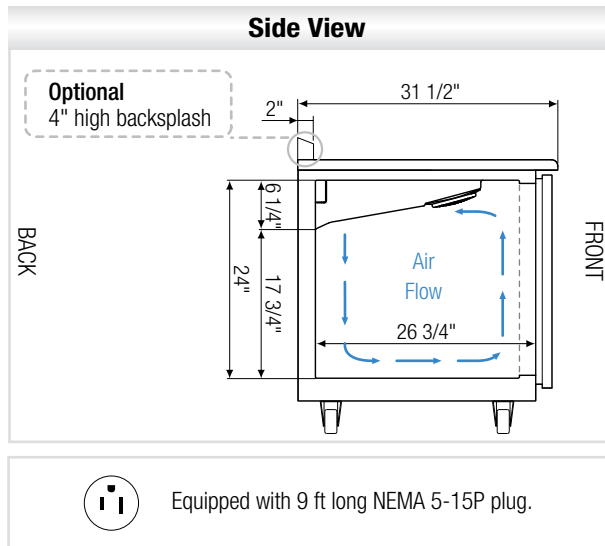

▲ ETRF2

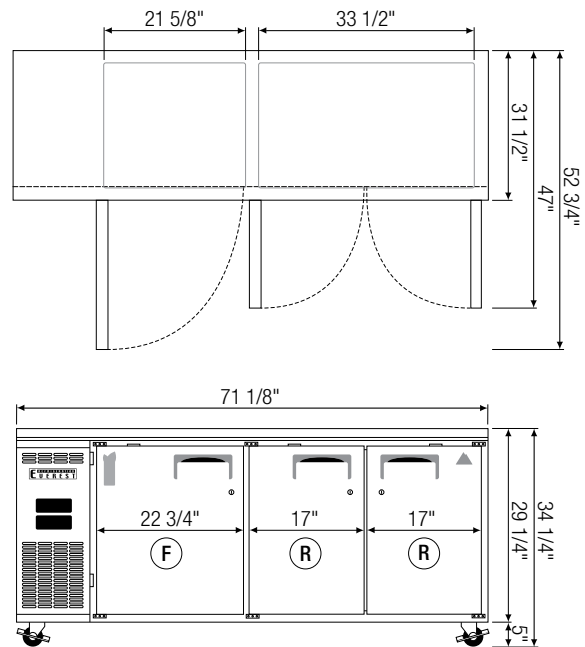

▲ ETRF3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	BTU/HR [†]	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
ETRF2	Dual	2	9 (R) 9 (F)	1/2	R-404A / R290 [^]	4	3,435	115-60-1	7.54	316	59 1/4	31 1/2	29 1/4
ETRF3	Dual	3	14 (R) 9 (F)	1/2	R-404A / R290 [^]	6	3,435	115-60-1	7.77	356	71 1/8	31 1/2	29 1/4

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 14°F (-10°C) & condensing temperature of 131°F (55°C).

(R) = Refrigerator | (F) = Freezer
Dual = Ref & Frz Combo

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated
Energy Efficiency information.

SIDE MOUNT GLASS DOOR UNDERCOUNTER REFRIGERATORS

Side Mounted Condensing Unit

ET - Series • ETGSR2 • ETGR2 • ETGWR2



▲ ETGSR2



▲ ETGR2



▲ ETGWR2

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Gray PVC door frames.
- Self-closes by weight.
- Removable doors and stainless steel door tracks make cleaning an easy process.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control


- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- 4" high stainless steel backplash for worktop application.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

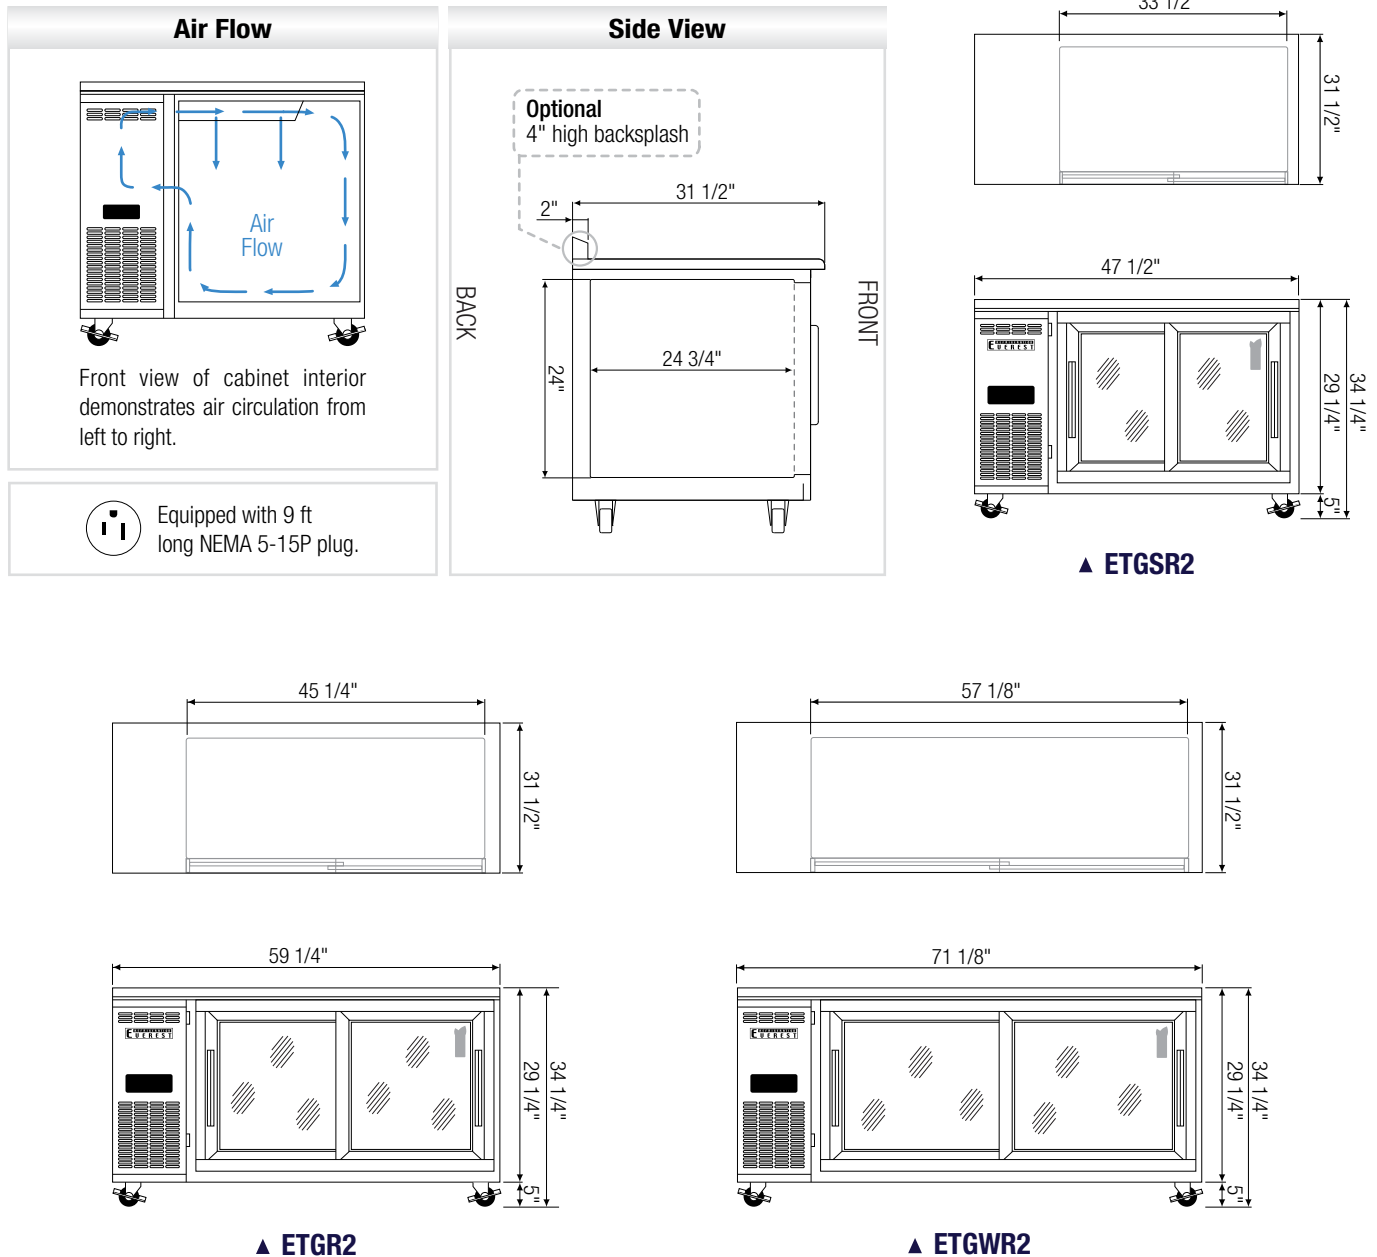

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	BTU/HR [†]	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
ETGSR2	Ref	2 (sliding)	13	1/3	R290	4	2,311	115-60-1	2.5	268	47 1/2	31 1/2	29 1/4
ETGR2	Ref	2 (sliding)	18	1/3	R290	4	2,311	115-60-1	2.5	308	59 1/4	31 1/2	29 1/4
ETGWR2	Ref	2 (sliding)	22	1/3	R290	4	2,311	115-60-1	2.5	351	71 1/8	31 1/2	29 1/4

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

Chef Bases

ECB Series

Reference Model: ECB82-86D4

The Chef Base series is equipped with innovative features that protect from heat-induced distortion of the work top surface caused by prolonged exposure to mounted cooking equipment. Unique only to Everest, dual air chambers, exhaust vents and additional insulation material diffuse and redirect heat away from the work top preserving its structural integrity.

1: Digital Control

Multi-function with easy to read LED display.



2: Heavy Duty Worktop**

16-gauge stainless steel reinforced by unique heat protection features will never warp under normal use.

3: Extra Worktop Insulation

High grade material withstands extreme temperature of up to 500°F and provides an added layer of protection to keep the cabinet cold.

4: Safety Grips

Provide secure maneuverability for the unit.

5: Safety Corner Guards

Keep mounted cooking equipment from sliding off the worktop.

6: Recessed Door Handle


Heavy duty with high traction surface.

7: Air Chamber and Vents

Innovative feature that channels heat produced by cooking equipment away from the unit. It prevents heat-induced warping of the worktop, helps keep the cabinet cold and reduces overall energy costs.



● Exterior ○ Interior

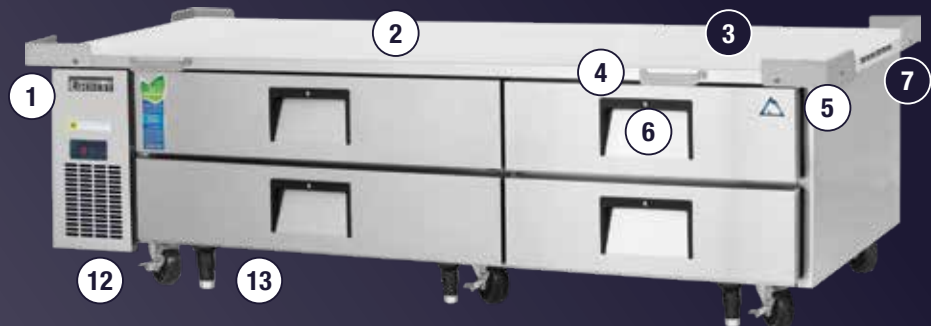

Blizzard R290 Condensing Unit

Side mounted, self-contained, fully detachable and uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

Audible Overheat Protection Alarm

Keeps compressor and condenser coil from overheating.

Self-Maintaining Condensate Pan


Energy efficient and requires no external drains or electric heaters.

ECM Evaporator Fan Motor

Electronically Commutated. Achieves rapid cooling with less energy.

ECM Condenser Fan Motor

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

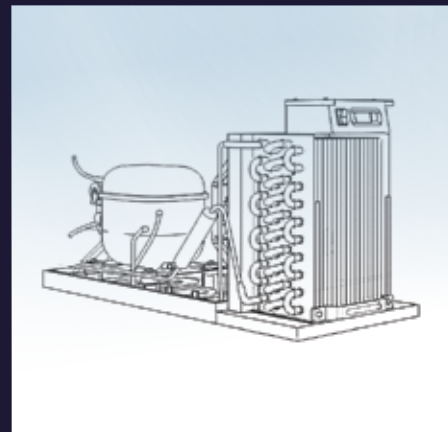

8: Heat Resistant Gaskets

Will never melt from exposure to cooking equipment during normal application.

9: Heavy Duty Drawer Slides

14-gauge stainless steel brackets and low-friction rollers withstand intense drawer use.

10: Full Length Air Duct

Ensures optimal distribution of cold air.

11: Reinforced Caster Brackets



Made from 12-gauge sheet metal to fully support the added weight of mounted cooking equipment.

12: Heavy Duty Swivel Casters

Standard 5" with locks on front set. Optional 3" swivel caster or height-adjustable leg replacements also available.

13: Leg Stabilizers*

Adjustable stainless steel clad ABS leg provides extra stability when opening doors.



CHEF BASES (TWO DRAWER)

Side Mounted Condensing Unit

ECB - Series • ECB36D2 • ECB48D2 • ECB52D2 • ECB52-60D2



▲ ECB36D2



▲ ECB48D2



▲ ECB52D2



▲ ECB52-60D2

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- 16-gauge stainless steel worktop is built with unique air chamber and vents that channel heat produced by mounted cooking equipment away from the unit. Additional layer of high grade insulation material withstands extreme heat. These features prevent the worktop from heat-induced warping, keep the cabinet cold and reduce overall energy costs.
- Thick gauge stainless steel corner guards keep mounted cooking equipment from sliding off the worktop.
- Heavy duty stainless steel grips provide secure maneuverability for the unit.
- 12-gauge metal caster brackets support additional weight of mounted cooking equipment.
- Four 5" swivel casters with locks on front set. Two front leg stabilizers standard for all models.

Recommended Operating Conditions

- A minimum clearance of 6" is required between the cooking equipment's heating element and the chefbase worktop.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Refrigeration System


- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening drawers.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Drawers

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Thick gauge, stainless steel drawer frames with low-friction ball bearings.
- Snap-in, heat resistant, magnetic drawer gaskets make cleaning and replacement an easy process.
- High strength, recessed drawer handles.
- NSF certified polycarbonate 4" deep pans (refer to the website for pan configurations).


Dimensions

Side View




Corner Guards

Durable stainless steel corner guards mounted on the top surface prevent cooking equipment from accidentally sliding off the unit.




Stainless Steel Grips

Heavy duty stainless steel top surface grips for easy and safe maneuverability of the unit.

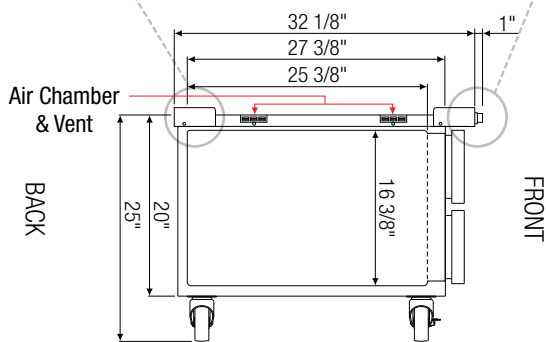


Air Flow

Front view of cabinet interior demonstrates air circulation from left to right.




ABS Legs




Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening, closing doors and weight support.




Equipped with 9 ft long NEMA 5-15P plug.




▲ ECB36D2







▲ ECB48D2



▲ ECB52D2

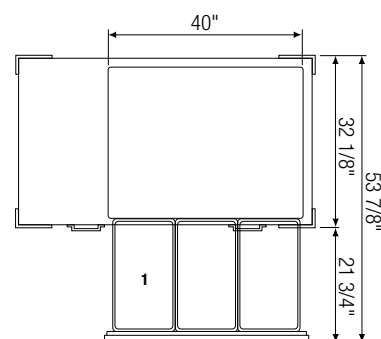

▲ ECB52-60D2

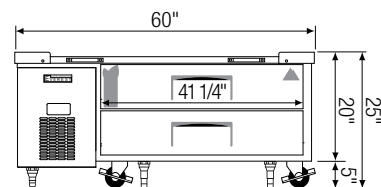

Model	Ref/ Frz/ Dual	# of Drawers	Max. Weight Support Capacity (LBS)	HP	Refrigerant	# of Pans	BTU/HR [†]	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D ^a	H [*]
ECB36D2	Ref	2	717	1/4+	R290	1 x 2 1/6 x 6	1,926	115-60-1	3.5	252	36 3/8	32 1/8	20
ECB48D2	Ref	2	717	1/4+	R290	1 x 4 1/6 x 6	1,926	115-60-1	3.5	300	48 3/8	32 1/8	20
ECB52D2	Ref	2	717	1/4+	R290	1x6	1,926	115-60-1	3.5	320	51 7/8	32 1/8	20
ECB52-60D2	Ref	2	717	1/4+	R290	1x6	1,926	115-60-1	3.5	342	60	32 1/8	20

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a: Depth does not include 1" for stainless steel grip.

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

CHEF BASES (FOUR DRAWER)

Side Mounted Condensing Unit

ECB - Series • ECB72D4 • ECB82D4 • ECB82-84D4 • ECB82-86D4 • ECB96D4



▲ ECB72D4



▲ ECB82D4



▲ ECB82-84D4



▲ ECB82-86D4



▲ ECB96D4

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- 16-gauge stainless steel worktop is built with unique air chamber and vents that channel heat produced by mounted cooking equipment away from the unit. Additional layer of high grade insulation material withstands extreme heat. These features prevent the worktop from heat-induced warping, keep the cabinet cold and reduce overall energy costs.
- Thick gauge stainless steel corner guards keep mounted cooking equipment from sliding off the worktop.
- Heavy duty stainless steel grips provide secure maneuverability for the unit.
- 12-gauge metal caster brackets support additional weight of mounted cooking equipment.
- Six 5" swivel casters with locks on front set. Three front leg stabilizers standard for all models.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Recommended Operating Conditions

- A minimum clearance of 6" is required between the cooking equipment's heating element and the Chef Base worktop.

Options

- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening drawers.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.


Drawers

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Thick gauge, stainless steel drawer frames with low-friction ball bearings.
- Snap-in, heat resistant, magnetic drawer gaskets make cleaning and replacement an easy process.
- High strength, recessed drawer handles.
- NSF certified polycarbonate 4" deep pans (refer to the website for pan configurations).




Dimensions

Side View



Corner Guards

Durable stainless steel corner guards mounted on the top surface prevent cooking equipment from accidentally sliding off the unit.



Stainless Steel Grips

Heavy duty stainless steel top surface grips for easy and safe maneuverability of the unit.

ABS Legs






Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening, closing doors and weight support.




Equipped with 9 ft long NEMA 5-15P plug.

Air Flow


Front view of cabinet interior demonstrates air circulation from left to right.

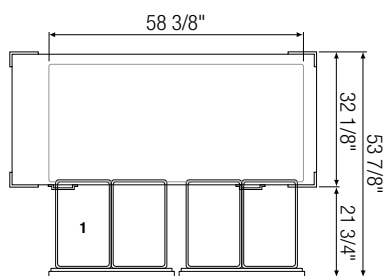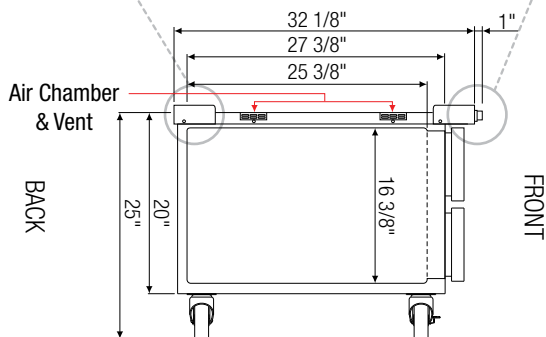




▲ ECB72D4

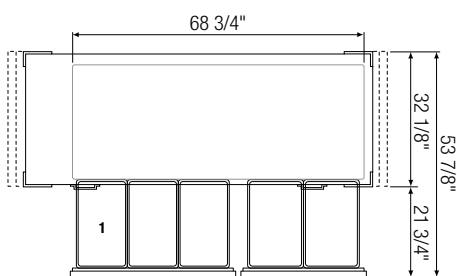

▲ ECB82D4 • ECB82-84D4 • ECB82-86D4

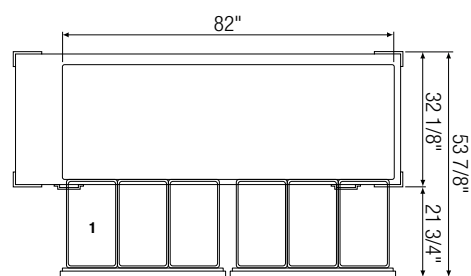

▲ ECB96D4

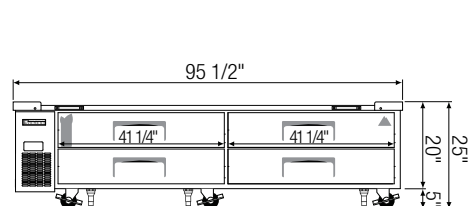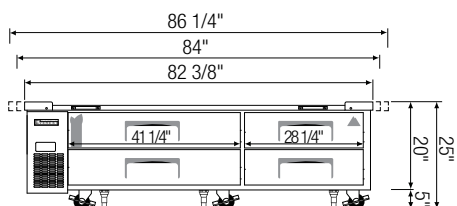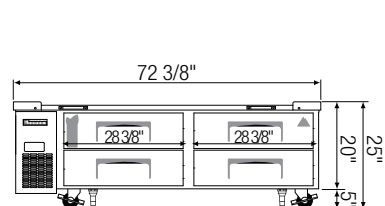

Model	Ref/ Frz/ Dual	# of Drawers	Max. Weight Support Capacity (LBS)	HP	Refrigerant	# of Pans	BTU/HR [†]	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D ^a	H [*]
ECB72D4	Ref	4	1,084	1/4+	R290	1 x 8	1,926	115-60-1	3.50	421	72 3/8	32 1/8	20
ECB82D4	Ref	4	1,084	1/3	R290	1 x 10	2,311	115-60-1	2.50	484	82 3/8	32 1/8	20
ECB82-84D4	Ref	4	1,084	1/3	R290	1 x 10	2,311	115-60-1	2.50	489	84	32 1/8	20
ECB82-86D4	Ref	4	1,084	1/3	R290	1 x 10	2,311	115-60-1	2.50	494	86 1/4	32 1/8	20
ECB96D4	Ref	4	1,434	1/3	R290	1 x 12	2,311	115-60-1	2.50	567	95 1/2	32 1/8	20

Ref = Refrigerator

*: Height does not include 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

a: Depth does not include 1" for stainless steel grip.

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.




Please visit our website for updated Energy Efficiency information.

Standard Features & Benefits


Heat Defense & Anti-Warp Features for Chef Bases

This unique Everest patented system prevents the chefbase worktop from heat-induced warping caused by prolonged exposure and very close proximity to mounted cooking equipment. A combination of high strength 16-gauge stainless steel worktop, extra heat insulation material, dual air chambers and vents not only mitigate but also channel heat away from the chefbase. These heat defense and anti-warp features not only preserve the structural integrity of the chefbase, it also keeps the cabinet cold and effectively reduces overall energy costs.

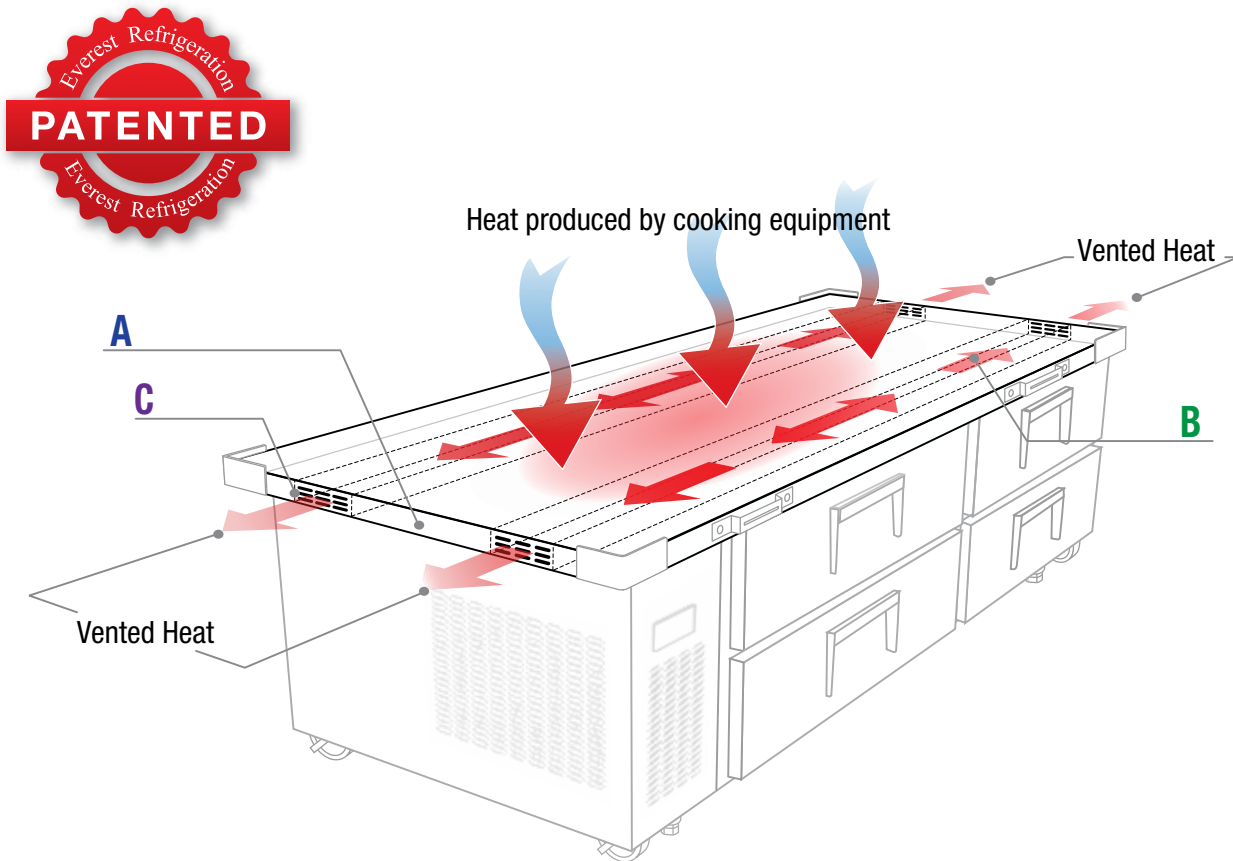


A. Covered High Heat Insulation

In addition to the standard 2.5" thick high density polyurethane insulation, chefbases are also equipped with high heat insulation material that can withstand extreme heat of up to 500°F. Layered between the worktop panel and unit body, it keeps the heat of mounted cooking equipment from reaching the cabinet interior.

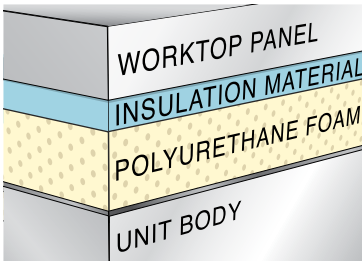


B. Dual Air Chambers

Two, 4" wide and 1" deep full length air chambers located directly underneath the worktop allow heat to travel across horizontal channels and exit out of vents. By expelling majority of the heat, the system only needs to mitigate a significantly less amount.

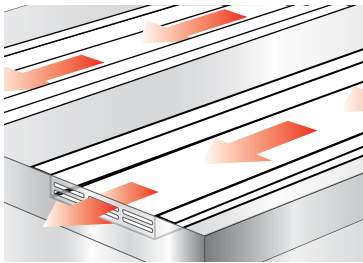

C. Air Vents

Multiple vents located on each side of the dual air chambers allow hot air to escape freely.

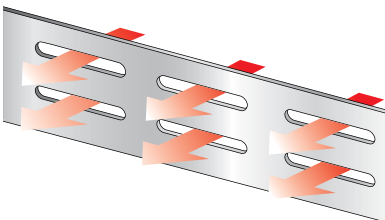

Food Prep. Tables

Back Mounted Condensing Unit - *EPB & EOTP Series*

Reference Model: EPBSR2

Enhance prep line productivity with the dependable Food Prep Table Back Mount series. High quality, 16 gauge stainless steel worktops, lids and hoods, detachable cutting boards and adjustable polycarbonate food pans are just some of the features designed to improve workflow. Back mounts come with an easy-dial analog thermostat for effortless temperature adjustment.

● Exterior ○ Interior

1: Digital Control

Multi-function with easy to read LED display.



2: Insulated Top Pan Lid

½" thick, polyurethane insulated lid keeps top pans cold and prevents moisture build up. Props open for accessibility.

3: Removable Top Pans

NSF certified 6" deep polycarbonate pans are removable for storage options and cleaning.

4: Detachable Cutting Board

Plastic cutting board and stainless steel brackets fully detach for ease of cleaning.

5: Recessed Door Handle

Heavy duty with high traction surface.

6: Front Breathing Vents

Draw and release air through the front grill for flexibility in installation.

7: Heavy Duty Swivel Casters

Standard 5" with locks on front set. Optional 3" swivel caster or height-adjustable leg replacements also available.



Blizzard R290 Condensing Unit

Back mounted, self-contained, fully detachable and uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

Audible Overheat Protection Alarm

Keeps compressor and condenser coil from overheating.

Self-Maintaining Condensate Pan


Energy efficient and requires no external drains or electric heaters.

ECM Evaporator Fan Motor

Electronically Commutated. Achieves rapid cooling with less energy.

ECM Condenser Fan Motor

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

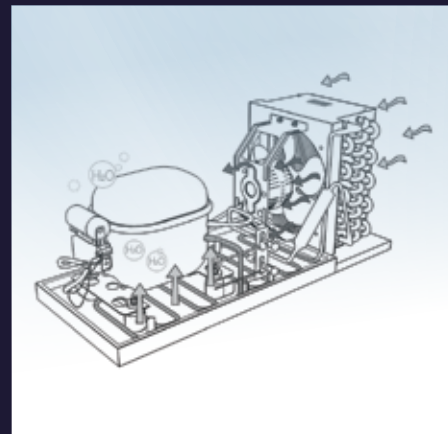

8: Full Length Air Duct

Ensures optimal distribution of cold air.

9: Rear Bumpers

Keeps a safe distance between the wall and the unit to prevent ventilation obstruction.

10: Vacuum Relief U-Trap

Keeps hot air from entering the cabinet interior and helps relieve cabinet pressure.

11: Ridge-Lined Door Gaskets

Keeps air tight seal and promotes smooth cabinet re-entry. Snap-in for easy cleaning and replacement.

12: Stainless Steel Interior & Exterior

High quality with rounded corners for a hazard-free workspace.

13: Air Tight Seal

Self-closing door with adjustable torsion system ensures a positive seal.

14: Adjustable Preparation Area


Stainless steel pan dividers are adjustable for top pan customization and are removable for ease of cleaning.

15: Thick Insulation

2.5" thick high density polyurethane insulation ensures temperature stability and conserves energy.

16: Optional Double Overshelf

Provides additional storage and serving options. NSF certified, made of stainless steel.



BACK MOUNT SANDWICH PREP. TABLES

Back Mounted Condensing Unit

EPBN - Series • EPBNR1 • EPBNSR2 • EPBNR2 • EPBNWR2 • EPBNR3



▲ EPBNR1



▲ EPBNSR2



▲ EPBNR2



▲ EPBNWR2



▲ EPBNR3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Front air breathing for flexibility in installation.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.

Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for size and quantity).
- ½" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 12 ¼" deep cutting board is removable for ease of cleaning.

Shelving

- One epoxy coated, steel wire shelf per section.
- Height adjustable stainless steel clips.

Temperature Control


- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- NSF certified stainless steel double overshef.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (applies to EPBNR1).


Dimensions

Side View

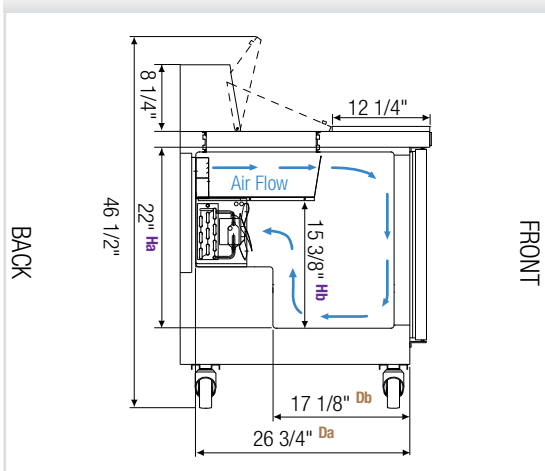


Equipped with 9 ft long NEMA 5-15P plug.


✓ : Mounting space for oversheif.

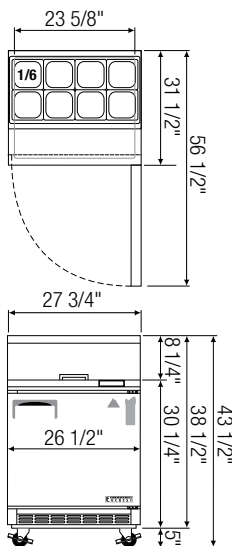


▲ EPBNR1

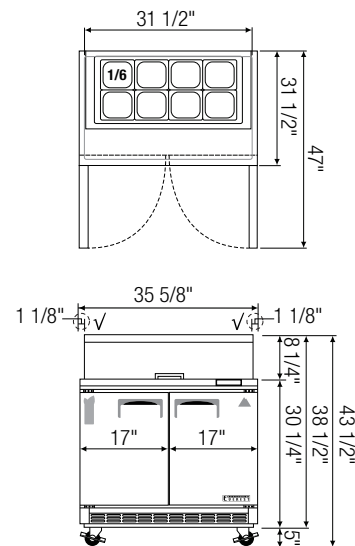


▲ EPBNSR2

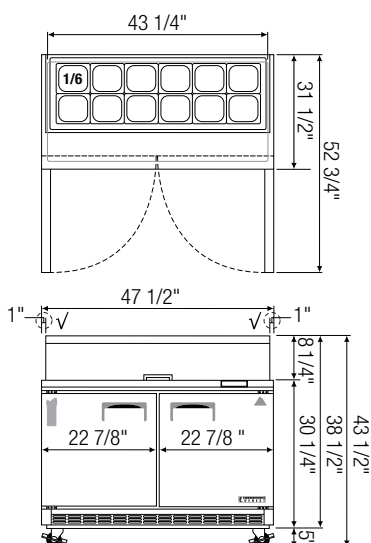

▲ EPBNR2

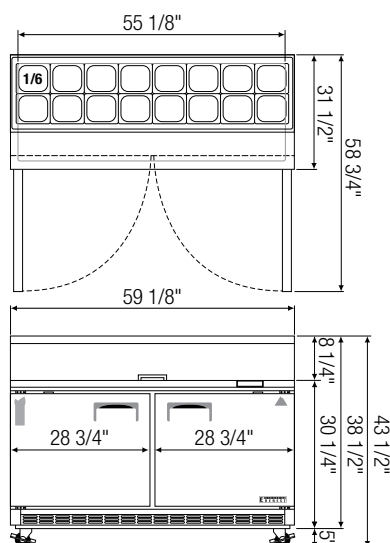

▲ EPBNWR2

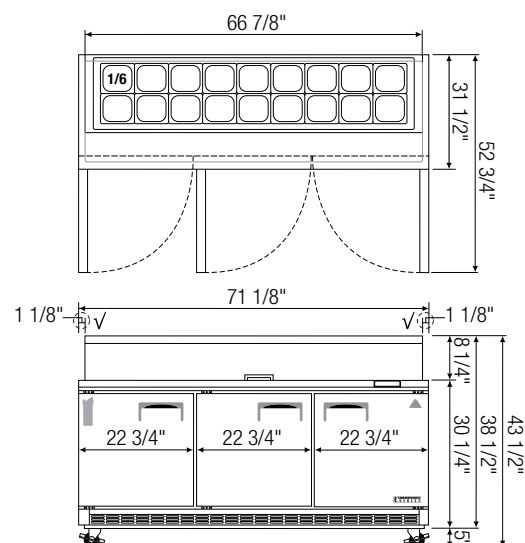

▲ EPBNR3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D ^a	H [*]
EPBNR1	Ref	1	8	1/5	R290	1	1/6 X 8	115-60-1	2.50	226	27 3/4	31 1/2	38 1/2
EPBNSR2	Ref	2	10	1/5	R290	2	1/6 X 8	115-60-1	2.50	268	35 5/8	31 1/2	38 1/2
EPBNR2	Ref	2	13	1/4+	R290	2	1/6 X 12	115-60-1	3.50	313	47 1/2	31 1/2	38 1/2
EPBNWR2	Ref	2	16	1/3	R290	2	1/6 X 16	115-60-1	2.50	382	59 1/8	31 1/2	38 1/2
EPBNR3	Ref	3	19	1/3	R290	3	1/6 X 18	115-60-1	2.50	426	71 1/8	31 1/2	38 1/2

*: Height does not include 5" for casters.

a: Depth includes 12 1/4" cutting board.

Da, Db : Interior Depth Ha, Hb : Interior Height

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

DRAWERED SANDWICH PREP. TABLES

Back Mounted Condensing Unit

EPBN - Series • EPBNR1-D2 • EPBNSR2-D2 • EPBNR2-D4 • EPBNWR2-D4 • EPBNR3-D2



▲ EPBNR1-D2



▲ EPBNSR2-D2



▲ EPBNR2-D4



▲ EPBNWR2-D4



▲ EPBNR3-D2

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Front air breathing for flexibility in installation.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Shelving

- One epoxy coated, steel wire shelf (applies to EPBNR3-D2).
- Height adjustable stainless steel clips.

Doors & Drawers

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Thick gauge, stainless steel drawer frames with low-friction ball bearings.
- Self-closing door with adjustable torsion system for a positive seal.
- Snap-in magnetic door and drawer gaskets make cleaning and replacement an easy process.
- High strength, recessed door and drawer handles.

Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for size and quantity).
- ½" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 12 ¼" deep cutting board is removable for ease of cleaning.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


Options

- NSF certified stainless steel double overself.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions

Side View

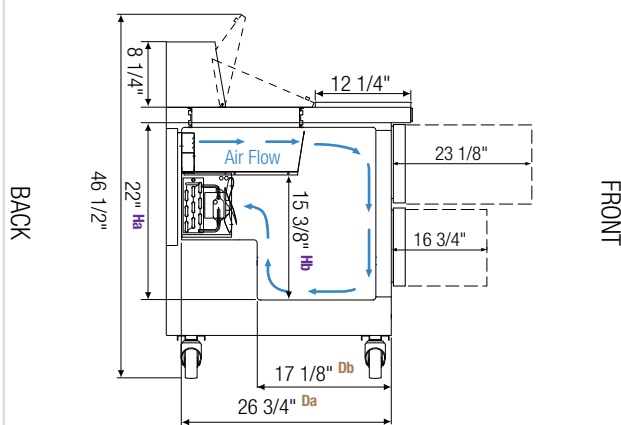


Equipped with 9 ft long NEMA 5-15P plug.



✓ : Mounting space for overshef.




▲ EPBNR1-D2




▲ EPBNSR2-D2






▲ EPBNR2-D4

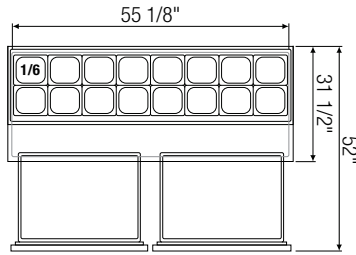

▲ EPBNWR2-D4

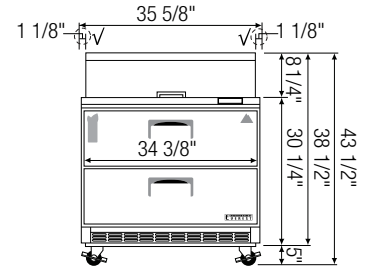

▲ EPBNR3-D2

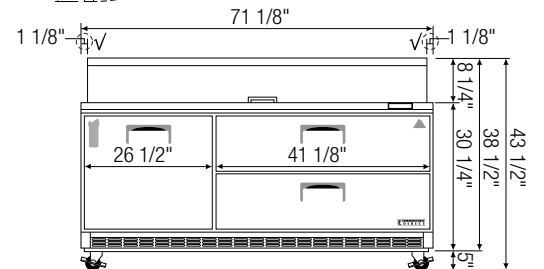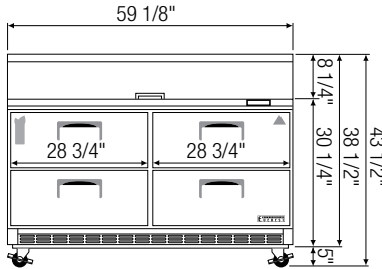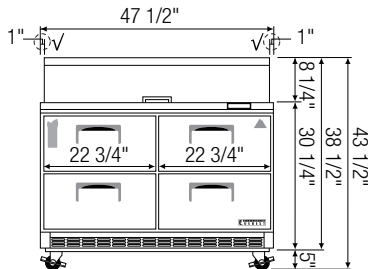

Model	Ref/ Frz/ Dual	# of Doors & Drawers	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	# of Pans (Top)	# of Pans (Drawer)	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
												L	D ^b	H [*]
EPBNR1-D2	Ref	2(DR)	8	1/5	R290	N/A	1/6 X 8	1/2 x 4 1/4 x 2	115-60-1	2.50	251	27 3/4	31 1/2	38 1/2
EPBNSR2-D2	Ref	2(DR)	10	1/5	R290	N/A	1/6 X 8	1/2 x 4, 1/3 x 2 1/4 x 2, 1/6 x 1	115-60-1	2.50	299	35 5/8	31 1/2	38 1/2
EPBNR2-D4	Ref	4(DR)	13	1/4+	R290	N/A	1/6 X 12	1/2 x 4, 1/3 x 2 1/4 x 2, 1/6 x 1	115-60-1	3.50	368	47 1/2	31 1/2	38 1/2
EPBNWR2-D4	Ref	4(DR)	16	1/3	R290	N/A	1/6 X 16	1/2 x 4, 1/3 x 2 1/4 x 2, 1/6 x 1	115-60-1	2.50	436	59 1/8	31 1/2	38 1/2
EPBNR3-D2	Ref	1(D) 2(DR)	19	1/3	R290	1	1/6 X 18	1/2 x 4, 1/3 x 2 1/4 x 2, 1/6 x 1	115-60-1	2.50	473	71 1/8	31 1/2	38 1/2

*: Height does not include 5" for casters.

† : Drawer pans are not included.

b : Depth includes 12 1/4" cutting board.

Da, Db : Interior Depth Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator | (DR) = Drawer | (D) = Door



Please visit our website for updated Energy Efficiency information.

BACK MOUNT MEGA-TOP SANDWICH PREP. TABLES

Back Mounted Condensing Unit

EPB - Series • EPBR1 • EPBSR2 • EPBR2 • EPBWR2 • EPBR3



▲ EPBR1



▲ EPBSR2



▲ EPBR2



▲ EPBWR2



▲ EPBR3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Front air breathing for flexibility in installation.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.

Preparation Area

- Mega-top fits three rows of NSF certified polycarbonate 6" deep pans (see table for size and quantity).
- 1/2" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 9 1/8" deep cutting board is removable for ease of cleaning.

Shelving

- One epoxy coated, steel wire shelf per section.
- Height adjustable stainless steel clips.

Temperature Control



- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options


- NSF certified stainless steel double overshelf.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (applies to EPBR1).




Dimensions

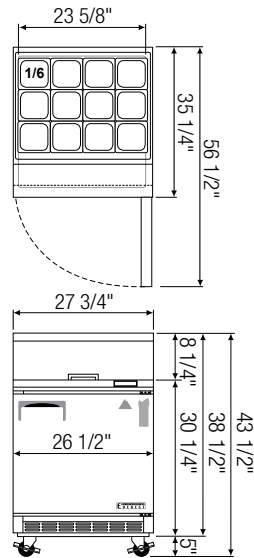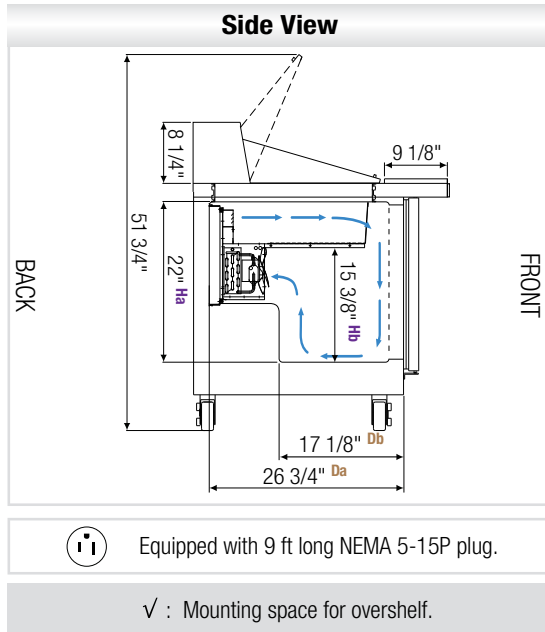


▲ EPBR1

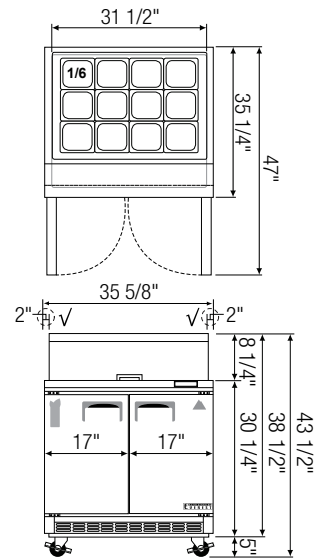


▲ EPBSR2

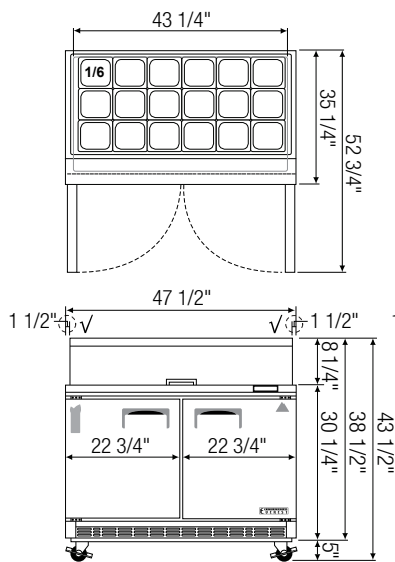

▲ EPBR2

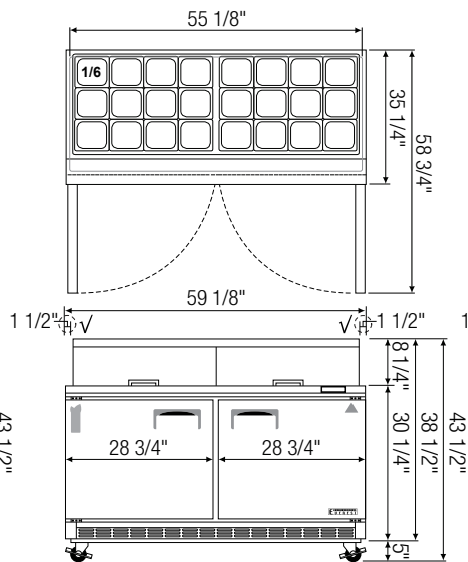

▲ EPBWR2

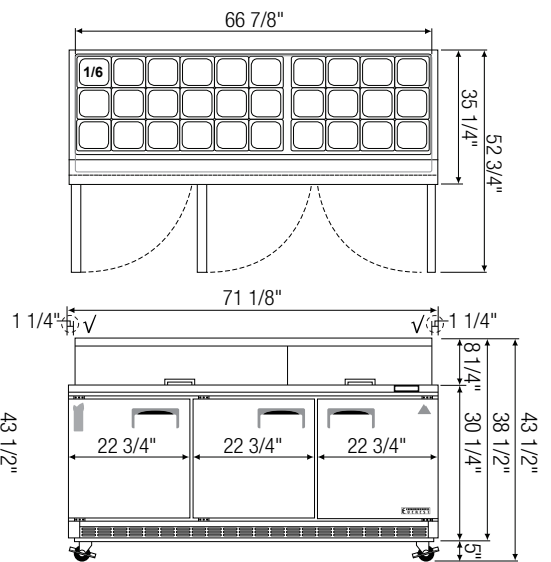

▲ EPBR3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D ^b	H [*]
EPBR1	Ref	1	8	1/5	R290	1	1/6 x 12	115-60-1	2.50	230	27 3/4	35 1/4	38 1/2
EPBSR2	Ref	2	10	1/5	R290	2	1/6 x 12	115-60-1	2.50	272	35 5/8	35 1/4	38 1/2
EPBR2	Ref	2	13	1/4+	R290	2	1/6 x 18	115-60-1	3.50	339	47 1/2	35 1/4	38 1/2
EPBWR2	Ref	2	16	1/3	R290	2	1/6 x 24	115-60-1	2.50	393	59 1/8	35 1/4	38 1/2
EPBR3	Ref	3	19	1/3	R290	3	1/6 x 30	115-60-1	2.50	455	71 1/8	35 1/4	38 1/2

★: Height does not include 5" for casters.

b: Depth includes 9 1/8" cutting board.

Da, Db : Interior Depth Ha, Hb : Interior Height

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

OPEN TOP PREP. TABLES

Back Mounted Condensing Unit

EOTP - Series • EOTP1 • EOTPS2 • EOTP2 • EOTPW2 • EOTP3



▲ EOTP1



▲ EOTPS2



▲ EOTP2



▲ EOTPW2



▲ EOTP3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop and top lids.
- Galvanized steel bottom.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Front air breathing for flexibility in installation.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.

Preparation Area

- Mega-top fits three rows of NSF certified polycarbonate 6" deep pans with lids (see table for size and quantity).
- Removable ½" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.

Shelving

- One epoxy coated, steel wire shelf per section.
- Height adjustable stainless steel clips.

Temperature Control



- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options


- 9 1/8" deep, removable cutting board.
- NSF certified stainless steel double overself.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.
- Left hinged door (applies to EOTP1).




Dimensions

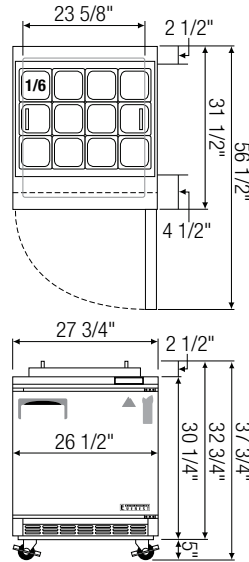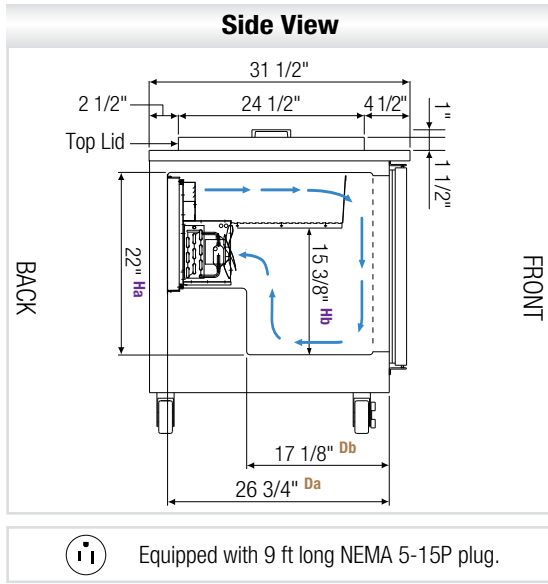


▲ E0TP1

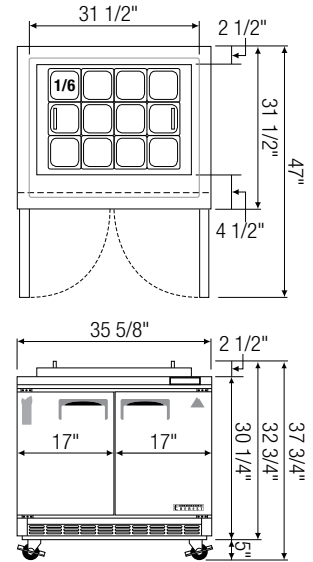


▲ E0TPS2

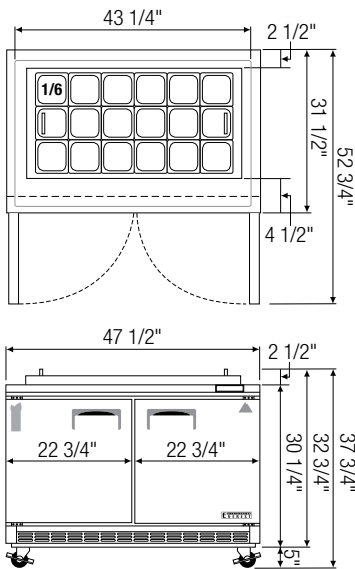

▲ E0TP2

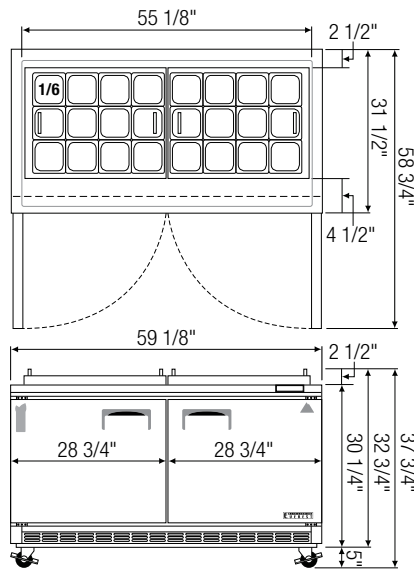

▲ E0TPW2

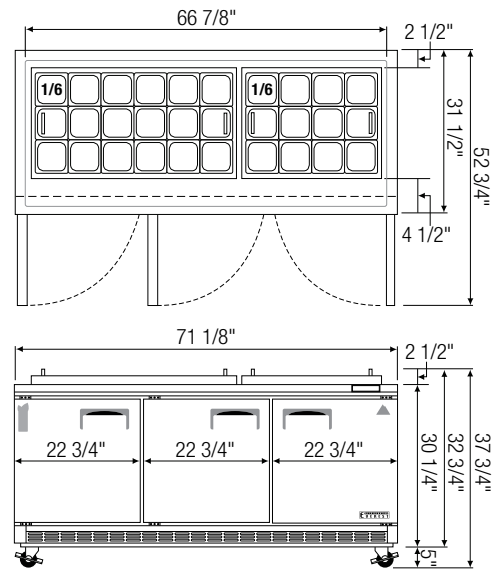

▲ E0TP3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
E0TP1	Ref	1	8	1/5	R290	1	1/6 x 12	115-60-1	2.50	226	27 3/4	31 1/2	32 3/4
E0TPS2	Ref	2	10	1/5	R290	2	1/6 x 12	115-60-1	2.50	260	35 5/8	31 1/2	32 3/4
E0TP2	Ref	2	13	1/4+	R290	2	1/6 x 18	115-60-1	3.50	308	47 1/2	31 1/2	32 3/4
E0TPW2	Ref	2	16	1/3	R290	2	1/6 x 24	115-60-1	2.50	360	59 1/8	31 1/2	32 3/4
E0TP3	Ref	3	19	1/3	R290	3	1/6 x 30	115-60-1	2.50	424	71 1/8	31 1/2	32 3/4

*: Height does not include 5" for casters, height includes top lid and handle.

Ref = Refrigerator

Da, Db : Interior Depth Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

Food Prep. Tables

Side Mounted Condensing Unit - EP & EPP Series

Reference Model: EPPR2-D2

The Food Prep Table Side Mount series comes with the traditional features of the back mount line with additional amenities to further boost convenience. Digital controls provide advanced temperature options in a user friendly interface.



Exterior



Interior

1: Digital Control

Multi-function with easy to read LED display.



2: Detachable Top Pan Lid

½" thick, polyurethane insulated lid keeps top pans cold and prevents moisture build up. Also detaches for accessibility and ease of cleaning.

3: Removable Top Pans

NSF certified 6" deep polycarbonate pans are removable for storage options and cleaning.

4: Detachable Cutting Board

Plastic cutting board and stainless steel brackets fully detach for ease of cleaning.

5: Recessed Door Handle

Heavy duty with high traction surface.

6: Stainless Steel Drawers

Comes 14-gauge stainless steel brackets and low-friction rollers that withstand intense drawers use.

7: Heavy Duty Swivel Casters

Standard 5" with locks on front set. Optional 3" swivel caster or height-adjustable leg replacements also available.



Blizzard R290 Condensing Unit

Side mounted, self-contained, fully detachable and uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

Audible Overheat Protection Alarm

Keeps compressor and condenser coil from overheating.

Self-Maintaining Condensate Pan


Energy efficient and requires no external drains or electric heaters.

ECM Evaporator Fan Motor

Electronically Commutated. Achieves rapid cooling with less energy.

ECM Condenser Fan Motor

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

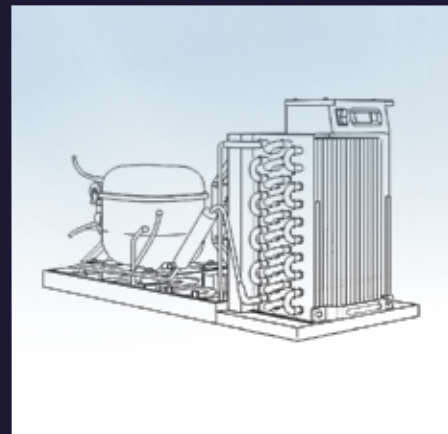

8: Full Length Air Duct

Ensures optimal distribution of cold air.

9: Rear Bumpers

Keeps a safe distance between the wall and the unit to prevent ventilation obstruction.

10: Vacuum Relief U-Trap

Keeps hot air from entering the cabinet interior and helps relieve cabinet pressure.

11: Ridge-Lined Door Gaskets

Keeps air tight seal and promotes smooth cabinet re-entry. Snap-in for easy cleaning and replacement.

12: Stainless Steel Interior & Exterior

High quality with rounded corners for a hazard-free workspace.

13: Air Tight Seal

Self-closing door with adjustable torsion system ensures a positive seal.

14: Adjustable Preparation Area




Stainless steel pan dividers are adjustable for top pan customization and are removable for ease of cleaning.

15: Thick Insulation

2.5" thick high density polyurethane insulation ensures temperature stability and conserves energy.

16: Optional Double Overshelf*

Provides additional storage and serving options. NSF certified, made of stainless steel.



SIDE MOUNT SANDWICH PREP. TABLES

Side Mounted Condensing Unit

EP - Series • EPR1 • EPR2 • EPWR2 • EPR3



▲ EPR1



▲ EPR2



▲ EPWR2



▲ EPR3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.

Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for size and quantity).
- ½" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 12 ¼" deep cutting board is removable for ease of cleaning.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options


- NSF certified stainless steel double overshef.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



5 YEAR Compressor
3 YEAR Parts & Labor



Dimensions

Air Flow



Front view of cabinet interior demonstrates air circulation from left to right.





Side View

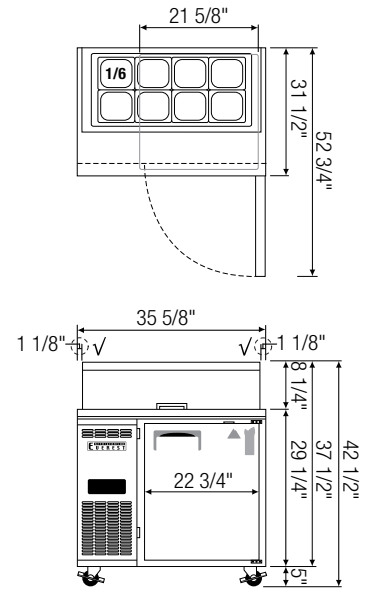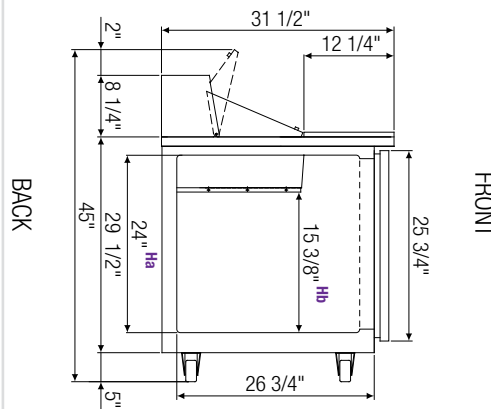


Equipped with 9 ft long NEMA 5-15P plug.

V : Mounting space for standard aftermarket overshef.


▲ EPR1

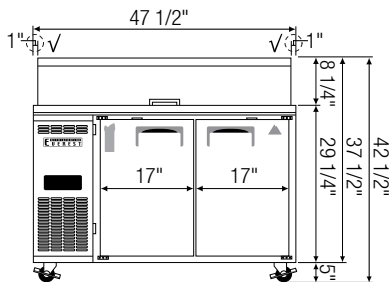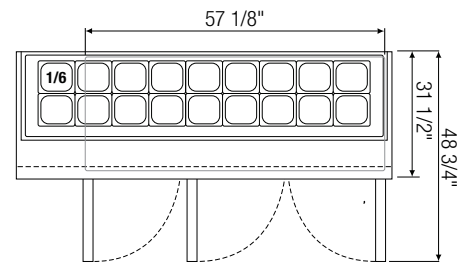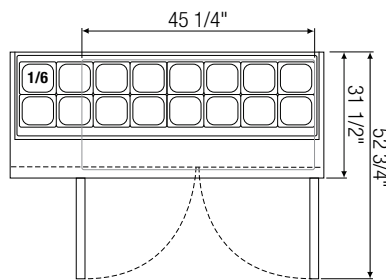

▲ EPR2

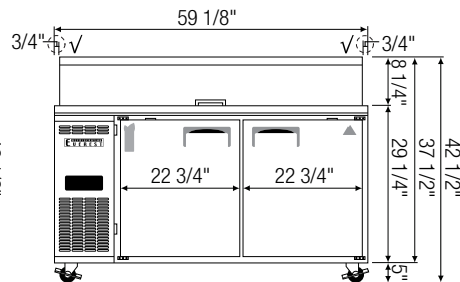

▲ EPWR2

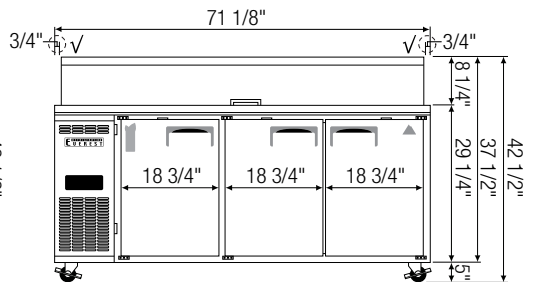

▲ EPR3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H*
EPR1	Ref	1	9	1/4+	R290	2	1/6 x 8	115-60-1	3.27	268	35 5/8	31 1/2	37 1/2
EPR2	Ref	2	13	1/4+	R290	4	1/6 x 12	115-60-1	3.48	326	47 1/2	31 1/2	37 1/2
EPWR2	Ref	2	17	1/4+	R290	4	1/6 x 16	115-60-1	3.48	382	59 1/8	31 1/2	37 1/2
EPR3	Ref	3	21	1/3	R290	6	1/6 x 18	115-60-1	2.55	456	71 1/8	31 1/2	37 1/2

*: Height does not include 5" for casters.

Ha, Hb : Interior Height

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

PIZZA PREP. TABLES

Side Mounted Condensing Unit

EPP - Series • EPPR1 • EPPSR2 • EPPR2 • EPPR3



▲ EPPR1



▲ EPPSR2



▲ EPPR2



▲ EPPR3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set (six casters for model EPPR3). Leg stabilizers standard for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.

Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for size and quantity).
- ½" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 19¼" deep cutting board is removable for ease of cleaning.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- NSF certified stainless steel double overself.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

ABS Legs




Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening and closing doors, and three additional leg for EPPR3 for weight support.





Equipped with 9 ft long NEMA 5-15P plug.

Air Flow




Front view of cabinet interior demonstrates air circulation from left to right.


Side View

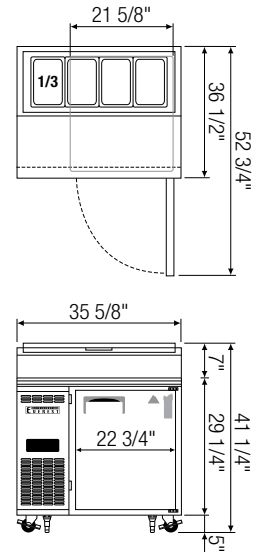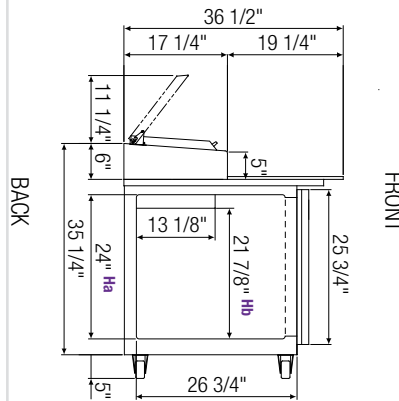


▲ EPPR1

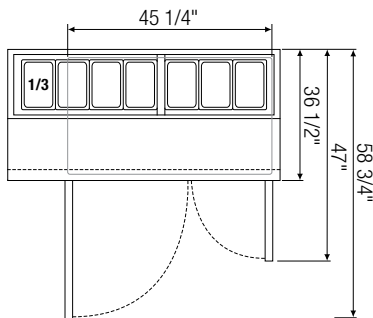




▲ EPPSR2

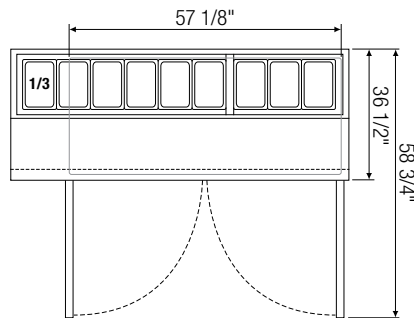

▲ EPPR2

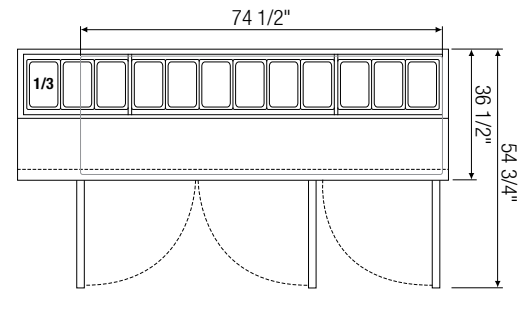

▲ EPPR3

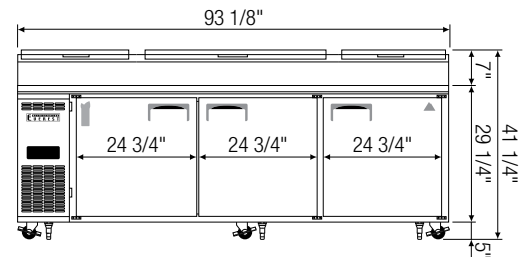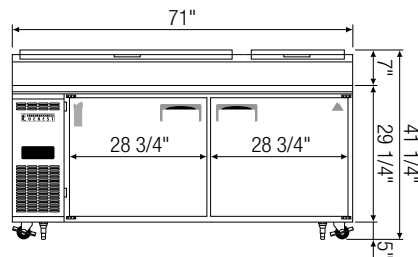

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D ^a	H [*]
EPPR1	Ref	1	9	1/3	R290	2	1/3 X 4	115-60-1	2.5	295	35 5/8	36 1/2	36 1/4
EPPSR2	Ref	2	16	1/3	R290	4	1/3 X 7	115-60-1	2.5	399	59 1/8	36 1/2	36 1/4
EPPR2	Ref	2	23	1/3	R290	4	1/3 X 9	115-60-1	2.5	450	71	36 1/2	36 1/4
EPPR3	Ref	3	30	1/3+	R290	6	1/3 X 12	115-60-1	2.5	596	93 1/8	36 1/2	36 1/4

*: Height does not include 5" for casters ; height includes top lid and handle.

a: Depth includes 19 1/4" cutting board.

Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator



Please visit our website for updated Energy Efficiency information.

DRAWERED PIZZA PREP. TABLES

Side Mounted Condensing Unit

EPP - Series • EPPR1-D2 • EPPR2-D2 • EPPR2-D4 • EPPR3-D2 • EPPR3-D4



▲ EPPR1-D2



▲ EPPR2-D2



▲ EPPR2-D4



▲ EPPR3-D2



▲ EPPR3-D4

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set (six casters for models EPPR3-D2 and EPPR3-D4). Leg stabilizers standard for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Doors & Drawers

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Thick gauge, stainless steel drawer frames with low-friction ball bearings.
- Self-closing door with adjustable torsion system for a positive seal.
- Snap-in magnetic door and drawer gaskets make cleaning and replacement an easy process.
- High strength, recessed door and drawer handles.

Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for size and quantity).
- ½" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 19 ¼" deep cutting board is removable for ease of cleaning.

Shelving

- Epoxy coated, steel wire shelves for applicable models (see table for quantity).
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


Options

- NSF certified stainless steel double overshef.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

Air Flow




Front view of cabinet interior demonstrates air circulation from left to right.



Equipped with 9 ft long NEMA 5-15P plug.


Side View

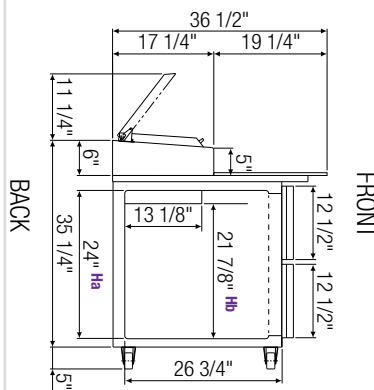

ABS Legs




Standard adjustable stainless steel clad ABS legs provide extra stability when opening and closing door.

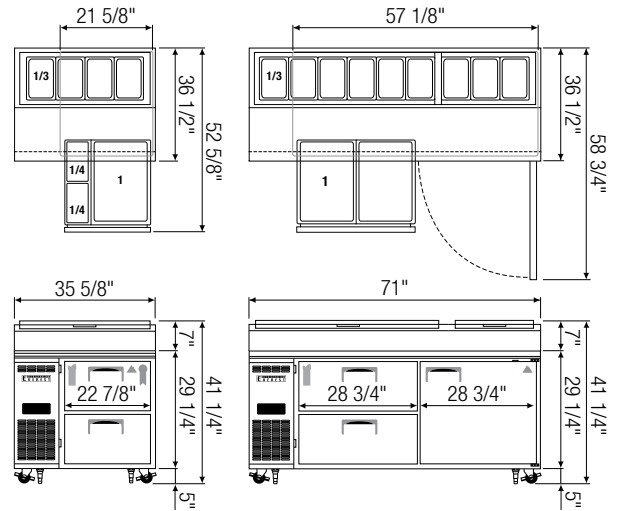


▲ EPPR1-D2


▲ EPPR2-D2

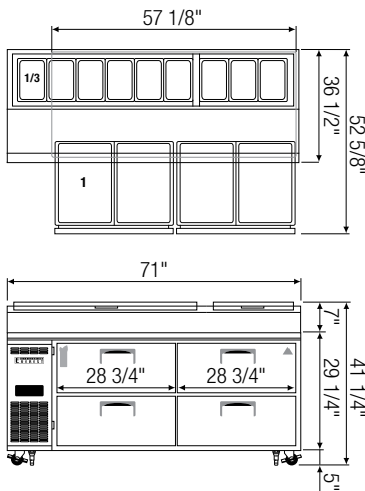

▲ EPPR2-D4

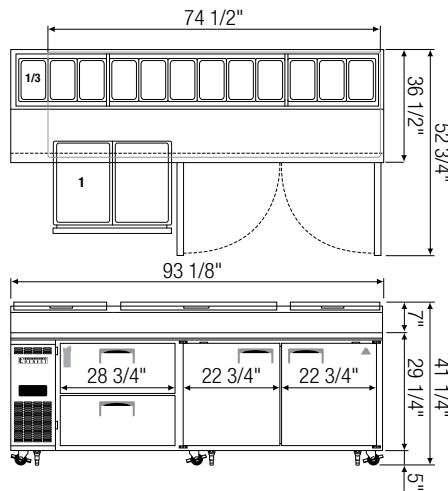

▲ EPPR3-D2

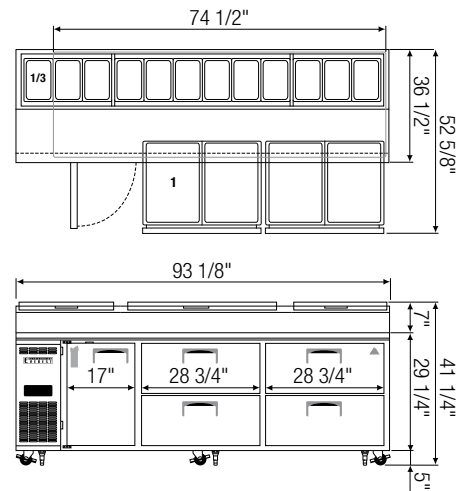

▲ EPPR3-D4

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	# of Pans (Top)	# of [†] Pans (Drawer)	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
												L	D ^a	H [*]
EPPR1-D2	Ref	2(DR)	9	1/3	R290	N/A	1/3 X 4	1 x 2 1/4 x 4	115-60-1	2.5	314	35 5/8	36 1/2	36 1/4
EPPR2-D2	Ref	1(D) 2(DR)	23	1/3	R290	2	1/3 X 9	1 x 4	115-60-1	2.5	492	71	36 1/2	36 1/4
EPPR2-D4	Ref	4(DR)	23	1/3	R290	N/A	1/3 X 9	1 x 8	115-60-1	2.5	494	71	36 1/2	36 1/4
EPPR3-D2	Ref	2(D) 2(DR)	30	1/3	R290	4	1/3 X 12	1 x 4	115-60-1	2.5	613	93 1/8	36 1/2	36 1/4
EPPR3-D4	Ref	1(D) 4(DR)	30	1/3	R290	2	1/3 X 12	1 x 8	115-60-2	2.5	642	93 1/8	36 1/2	36 1/4

*: Height does not include 5" for casters ; height includes top lid and handle.

a : Depth includes 19 1/4" cutting board.

† : Drawer pans are not included.

Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator | (DR) = Drawer | (D) = Door



Please visit our website for updated Energy Efficiency information.

Bar Equipment

EBB, EBD, EBC, EGC & ECF Series

Reference Model: EBD3-BBG

The multi-functional and varied capabilities of Everest's Bar Equipment series provides a solution for the beverage-service industry's every need. From customizable draft arms to easy-access, canned drink display and storage, or a hybrid of both - the application is robust as it is reliable.

● Exterior ○ Interior

1: Digital Control

Multi-function with easy to read LED display.



2: Draft Arms*

NSF certified, 3" diameter insulated stainless steel draft arm with matching air distributor. Available in single or dual faucets.

3: Door Lock or Ratchet Lock

Provides security options for any situation. Ratchet locks are standard for EBC and EGC models.

4: Chrome Plated Door Handle

High strength die-cast metal.

5: Recessed Door Handle

Heavy duty with high traction surface.

6: Double Pane Glass

Low emissivity and UV reflective to help regulate cabinet temperature.



Blizzard R290 Condensing Unit*

Side mounted, self-contained, fully detachable and uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

Audible Overheat Protection Alarm*

Keeps compressor and condenser coil from overheating.

Self-Maintaining Condensate Pan


Energy efficient and requires no external drains or electric heaters.

ECM Evaporator Fan Motor*

Electronically Commutated. Achieves rapid cooling with less energy.

ECM Condenser Fan Motor*

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

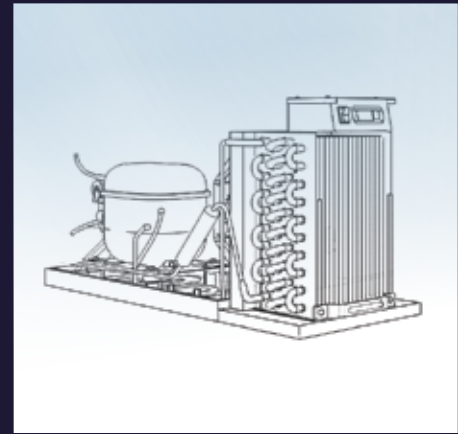

7: Full Length Air Duct*

Ensures optimal distribution of cold air.

8: Energy Efficient LED

Provides bright, high color illumination at lower heat output.

9: Detachable Drip Tray*

Removed easily for effortless cleaning.

10: External Drain Port*

$\frac{3}{4}$ " diameter drain fitting allows exterior connection of any standard drain hose. Unit does not include drain hose.

11: Stainless Steel Floor

Durable and easy to clean interior flooring.

12: Heavy Duty Door Threshold*

Protects door frame and cabinet floor when loading or unloading heavy contents.

13: Thick Gauge Door Hinge

Provides a stable base to doors to withstand intense use.

14: Cold Air Hose

Provides direct cooling to the draft tower, keeping beer or coffee fresh and chilled.

15: Optional Swivel Casters Or Legs





5" or 3" swivel casters or height-adjustable legs available.

16: Stainless Steel & Vinyl Exterior

Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.

17: Thick Insulation

2.5" thick high density polyurethane insulation ensures temperature stability and conserves energy.



BACK BAR COOLERS

EBB - Series • EBB23 • EBB48 • EBB48-SS • EBB59 • EBB59-SS • EBB69 • EBB90



▲ EBB23



▲ EBB48



▲ EBB48-SS



▲ EBB59



▲ EBB59-SS



▲ EBB69



▲ EBB90

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior. Stainless steel exterior for models EBB48-SS and EBB59-SS.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Four pre-installed 5" swivel casters with locks on front set (applies only to model EBB23).
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing (Blizzard R290 condensing unit is back mounted for model EBB23).
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Textured laminate, black vinyl exterior with galvanized steel interior. Stainless steel exterior and galvanized interior for models EBB48-SS and EBB59-SS.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.


Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


Options

- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

Side View (all models except EBB23)

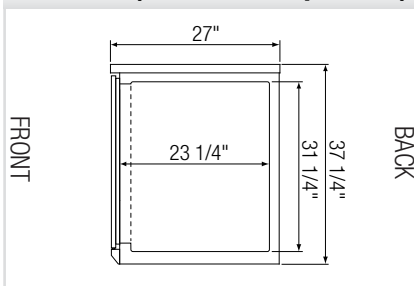


Air Flow (all models except EBB23)



Front view of cabinet interior demonstrates air circulation from left to right.


Side View (EBB23)

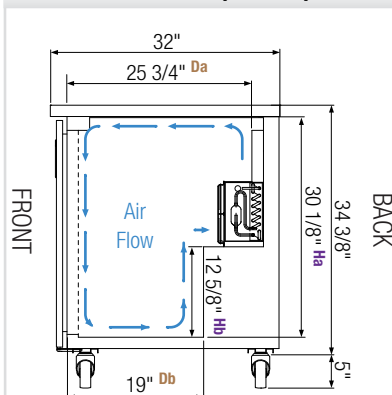

Pre-installed casters





Equipped with 9 ft long NEMA 5-15P plug.


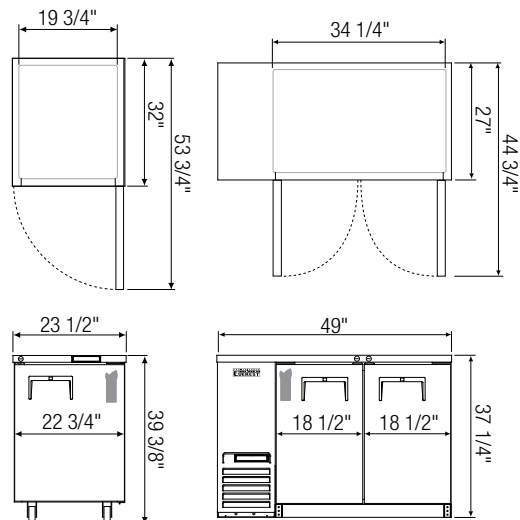


▲ **EBB23**



▲ **EBB48(SS)**

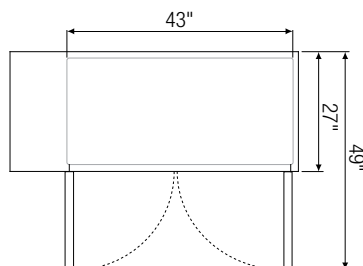

▲ **EBB59(SS)**

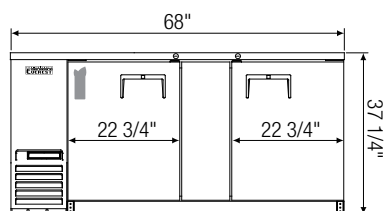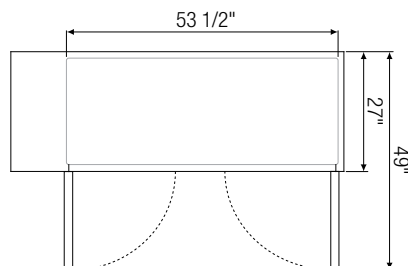

▲ **EBB69**

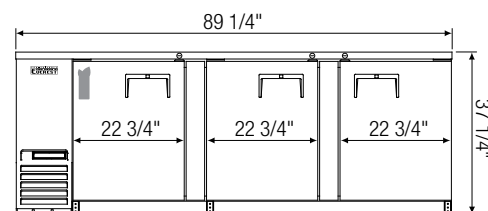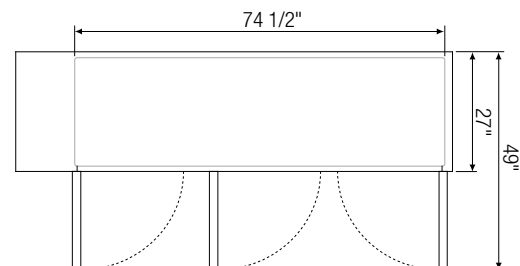

▲ **EBB90**

Model	Ref/ Frz/ Dual	# of Doors	Shelves	Capacity (Cu. Ft.)	HP	BTU/HR †	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D	H
EBB23	Ref	1	2	8	1/5	1,655	R290	220	125	115-60-1	2.5	167	23 1/2	32	39 3/8*
EBB48(SS)	Ref	2	4	14	1/4+	1,926	R290	490	344	115-60-1	3.5	269	49	27	37 1/4
EBB59(SS)	Ref	2	4	20	1/4+	1,926	R290	640	408	115-60-1	3.5	291	57 3/4	27	37 1/4
EBB69	Ref	2	4	24	1/4+	1,926	R290	800	504	115-60-1	3.5	323	68	27	37 1/4
EBB90	Ref	3	6	32	1/3	2,311	R290	1120	696	115-60-1	2.5	436	89 1/4	27	37 1/4

*: Height includes 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Da, Db : Interior Depth Ha, Hb, Hc : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator



Please visit our website for updated Energy Efficiency information.

24" DEEP BACK BAR COOLERS

EBB - Series • EBB48-24 • EBB59-24 • EBB69-24 • EBB90-24



▲ EBB48-24



▲ EBB59-24



▲ EBB69-24



▲ EBB90-24

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Textured laminate, black vinyl exterior with galvanized steel interior.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control





- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F.
- Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.







Dimensions

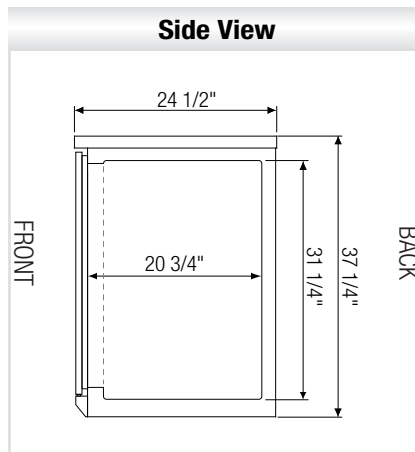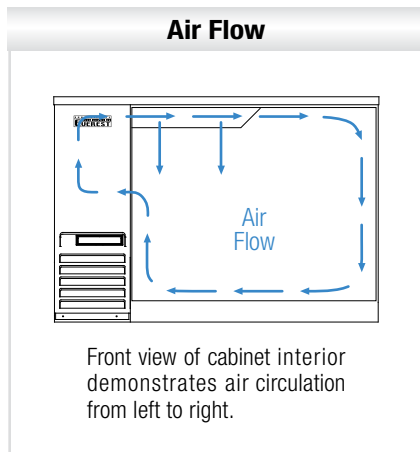


Equipped with 9 ft long NEMA 5-15P plug.


▲ **EBB48-24**

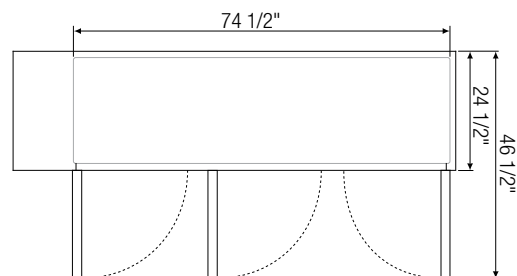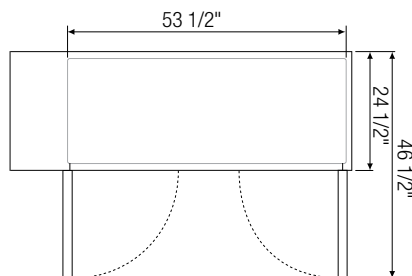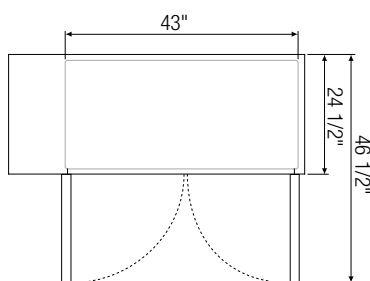

▲ **EBB59-24**

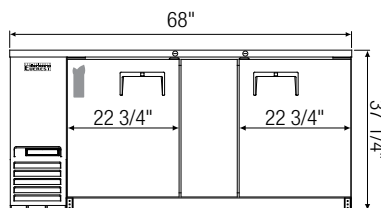

▲ **EBB69-24**

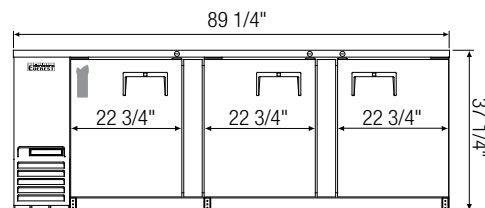

▲ **EBB90-24**

Model	Ref/ Frz/ Dual	# of Doors	Shelves	Capacity (Cu. Ft.)	HP	BTU/HR †	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D	H
EBB48-24	Ref	2	4	13	1/4+	1,926	R290	420	294	115-60-1	3.5	262	49	24 1/2	37 1/4
EBB59-24	Ref	2	4	17	1/4+	1,926	R290	560	357	115-60-1	3.5	274	57 3/4	24 1/2	37 1/4
EBB69-24	Ref	2	4	20	1/4+	1,926	R290	700	441	115-60-1	3.5	301	68	24 1/2	37 1/4
EBB90-24	Ref	3	6	28	1/3	2,311	R290	980	609	115-60-1	2.5	397	89 1/4	24 1/2	37 1/4

† : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated
Energy Efficiency information.

GLASS DOOR BACK BAR COOLERS

EBB - Series

• EBB23G • EBB48G • EBB48G-SS • EBB59G • EBB59G-SS • EBB69G • EBB90G



▲ EBB23G



▲ EBB48G



▲ EBB48G-SS



▲ EBB59G



▲ EBB59G-SS



▲ EBB69G



▲ EBB90G

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior. Stainless steel exterior for models EBB48G-SS and EBB59G-SS.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Four pre-installed 5" swivel casters with locks on front set (applies only to model EBB23G).
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing (Blizzard R290 condensing unit is back mounted for model EBB23G).
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Black PVC door frames. Matte finish aluminum door frames for models EBB48G-SS and EBB59G-SS.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


Options

- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions




Side View (all models except EBB23G)

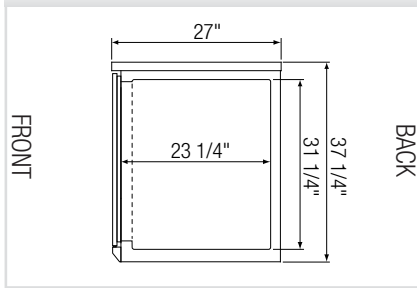

Air Flow (all models except EBB23G)






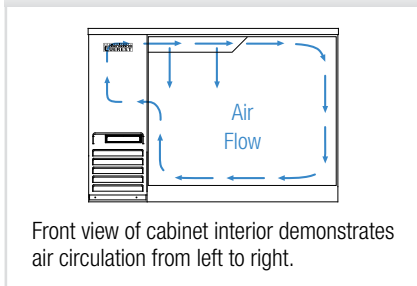


Side View (EBB23G)

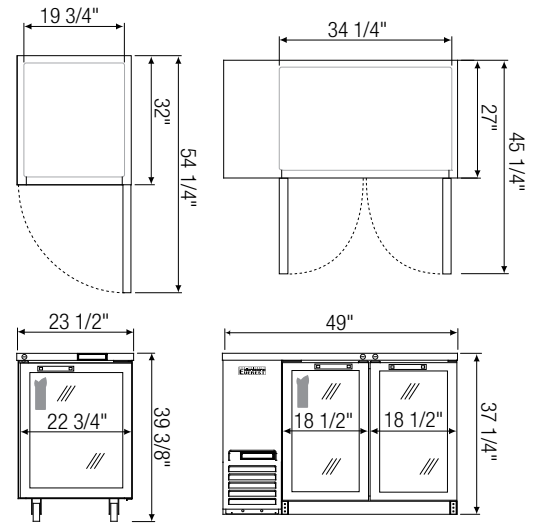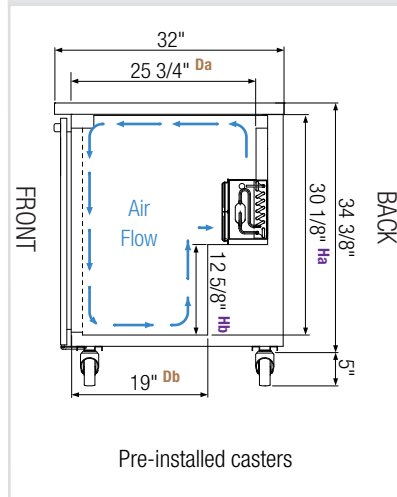

▲ **EBB23G**

▲ **EBB48G(SS)**

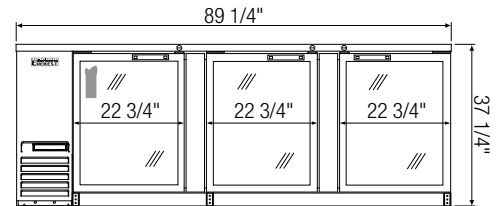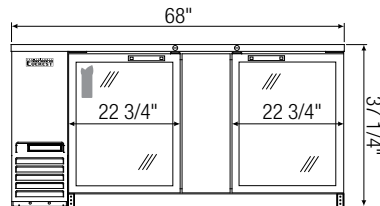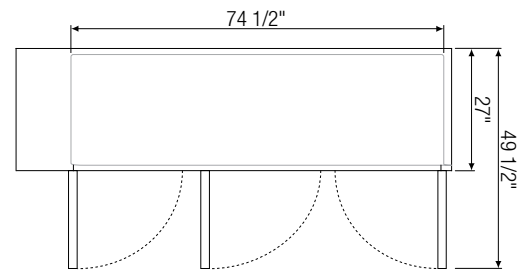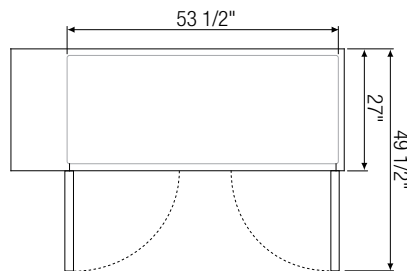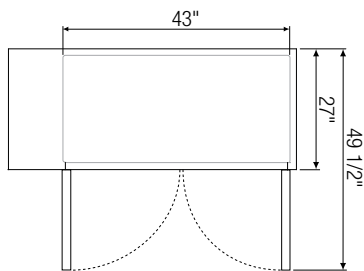

▲ **EBB59G(SS)**

▲ **EBB69G**

▲ **EBB90G**

Model	Ref/ Frz/ Dual	# of Doors	Shelves	Capacity (Cu. Ft.)	HP	BTU/HR †	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D*	H
EBB23G	Ref	1	2	8	1/5	1,655	R290	220	125	115-60-1	2.5	179	23 1/2	32	39 3/8 ^a
EBB48G(SS)	Ref	2	4	14	1/4+	1,926	R290	490	344	115-60-1	3.5	288	49	27	37 1/4
EBB59G(SS)	Ref	2	4	20	1/4+	1,926	R290	640	408	115-60-1	3.5	313	57 3/4	27	37 1/4
EBB69G	Ref	2	4	24	1/4+	1,926	R290	800	504	115-60-1	3.5	347	68	27	37 1/4
EBB90G	Ref	3	6	32	1/3	2,311	R290	1120	696	115-60-1	2.5	472	89 1/4	27	37 1/4

*: Depth does not include protruding door handles.

a: Height includes 5" for casters.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Da, Db : Interior Depth Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.

Ref = Refrigerator



Please visit our website for updated Energy Efficiency information.

24" DEEP GLASS DOOR BACK BAR COOLERS

EBB - Series • EBB48G-24 • EBB59G-24 • EBB69G-24 • EBB90G-24



▲ EBB48G-24



▲ EBB59G-24



▲ EBB69G-24



▲ EBB90G-24

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Black PVC door frames.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, die-cast door handles.
- Pre-installed door locks keep your items safe from theft.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control



- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F.
- Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options



- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.







Dimensions

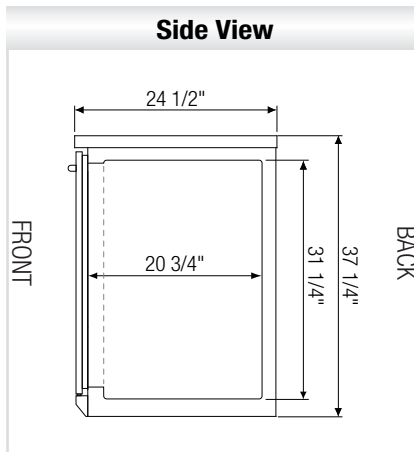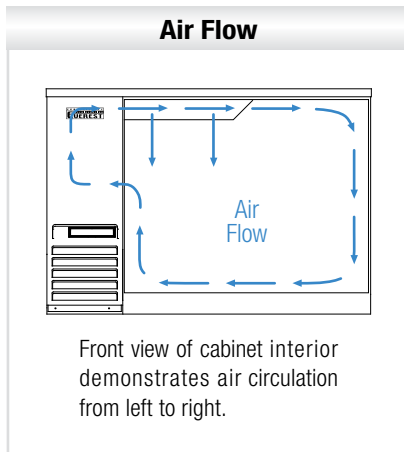


Equipped with 9 ft long NEMA 5-15P plug.




▲ EBB48G-24

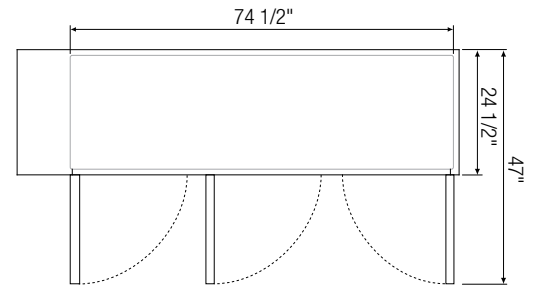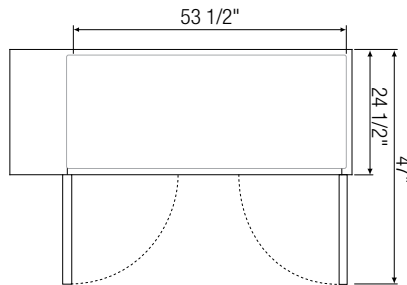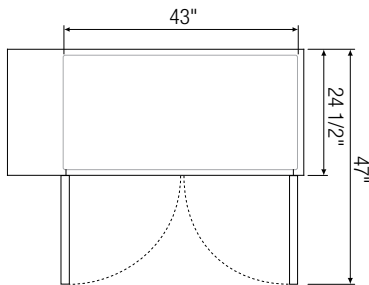

▲ EBB59G-24

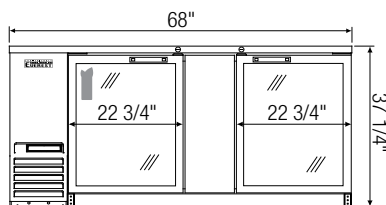

▲ EBB69G-24

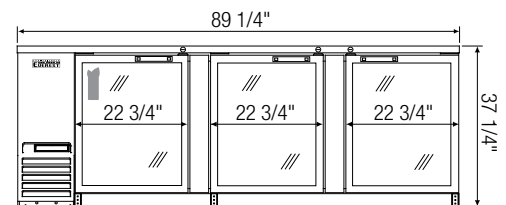

▲ EBB90G-24

Model	Ref/ Frz/ Dual	# of Doors	# of Shelves	Capacity (Cu. Ft.)	HP	BTU/HR †	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D*	H
EBB48G-24	Ref	2	4	13	1/4+	1,926	R290	420	294	115-60-1	3.5	277	49	24 1/2	37 1/4
EBB59G-24	Ref	2	4	17	1/4+	1,926	R290	560	357	115-60-1	3.5	297	57 3/4	24 1/2	37 1/4
EBB69G-24	Ref	2	4	20	1/4+	1,926	R290	700	441	115-60-1	3.5	328	68	24 1/2	37 1/4
EBB90G-24	Ref	3	6	28	1/3	2,311	R290	980	609	115-60-1	2.5	446	89 1/4	24 1/2	37 1/4

*: Depth does not include protruding door handles.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

24" DEEP SLIDING GLASS DOOR BACK BAR COOLERS

EBB - Series

• EBB48G-SD • EBB48G-SD-SS • EBB59G-SD • EBB59G-SD-SS • EBB69G-SD • EBB90G-SD



▲ EBB48G-SD



▲ EBB48G-SD-SS



▲ EBB59G-SD



▲ EBB59G-SD-SS



▲ EBB69G-SD



▲ EBB90G-SD

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior. Stainless steel exterior for models EBB48G-SD-SS and EBB59G-SD-SS.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Low emissivity double glass panes reflect UV rays for efficient cooling.
- Black PVC door frames. Gray PVC door frames for models EBB48G-SD-SS and EBB59G-SD-SS.
- Self-closes by weight.
- Removable doors and stainless steel door tracks make cleaning an easy process.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F.
- Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


Options

- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions

Air Flow





Front view of cabinet interior demonstrates air circulation from left to right.





Side View

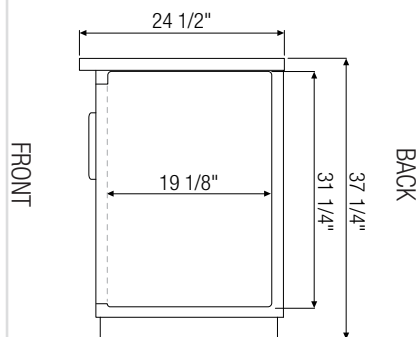


Equipped with 9 ft long NEMA 5-15P plug.




▲ **EBB48G-SD(SS)**

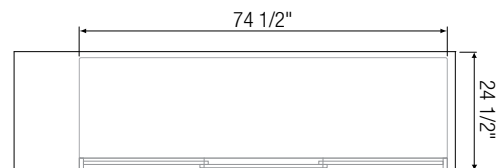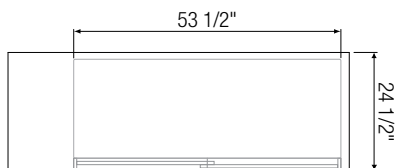

▲ **EBB59G-SD(SS)**

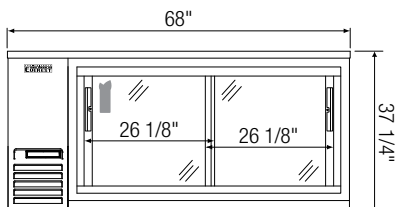

▲ **EBB69G-SD**

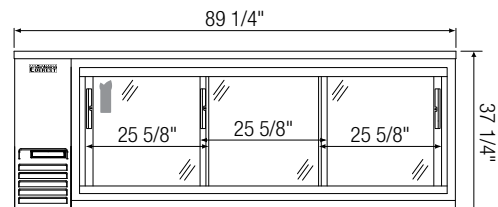

▲ **EBB90G-SD**

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D	H
EBB48G-SD(SS)	Ref	2	13	1/4+	1,926	R290	4	420	294	115-60-1	3.5	278	49	24 1/2	37 1/4
EBB59G-SD(SS)	Ref	2	17	1/4+	1,926	R290	4	560	357	115-60-1	3.5	295	57 3/4	24 1/2	37 1/4
EBB69G-SD	Ref	2	20	1/4+	1,926	R290	4	700	441	115-60-1	3.5	340	68	24 1/2	37 1/4
EBB90G-SD	Ref	3	28	1/3	2,311	R290	6	980	609	115-60-1	2.5	406	89 1/4	24 1/2	37 1/4

[†] : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

DIRECT DRAW KEG REFRIGERATORS

EBD - Series • EBD1 • EBD2 • EBD2-SS • EBD3 • EBD4 • EBD4-SS



▲ EBD1



▲ EBD2



▲ EBD2-SS



▲ EBD3



▲ EBD4



▲ EBD4-SS

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior. Stainless steel exterior for models EBD2-SS and EBD4-SS. Stainless steel rails for model EBD1.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Four pre-installed 5" swivel casters with locks on front set (applies only to model EBD1).
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing (Blizzard R290 condensing unit is back mounted for model EBD1).
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Textured laminate, black vinyl exterior with galvanized steel interior. Stainless steel exterior and galvanized interior for models EBD2-SS and EBD4-SS.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Draft Arms

- NSF certified, 3" diameter insulated stainless steel draft arm with matching air distributor. One single faucet draft arm for model EBD1. Two single faucet draft arms for models EBD2 and EBD2-SS. One single faucet and one dual faucet draft arms for model EBD3. Two dual faucet draft arms for models EBD4 and EBD4-SS.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


Options

- Dual faucet draft arms and matching air distributors.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions

Side View (all models except EBD1)

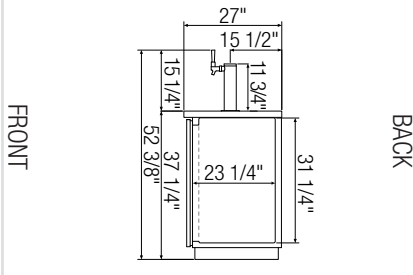


Air Flow (all models except EBD1)



Front view of cabinet interior demonstrates air circulation from left to right.

Side View (EBD1)

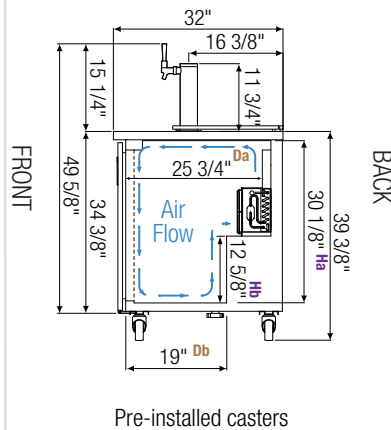


Pre-installed casters




Equipped with 9 ft long NEMA 5-15P plug.

✓ : Drain




T-Shaped PVC Drain Fittings w/ Movable Plug.


It is required to use a hose attachment w/ 3/4" inner diameter.

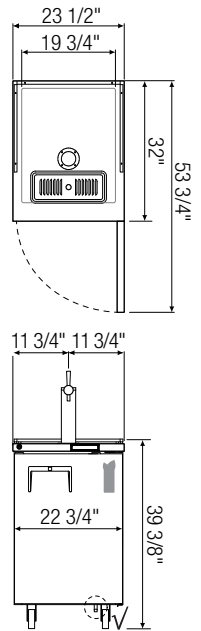


▲ EBD1






▲ EBD2(SS)

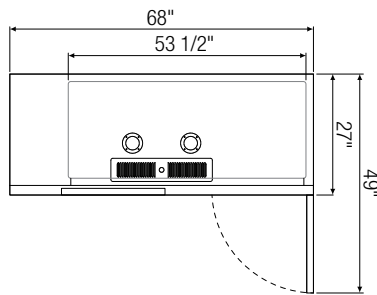

▲ EBD3

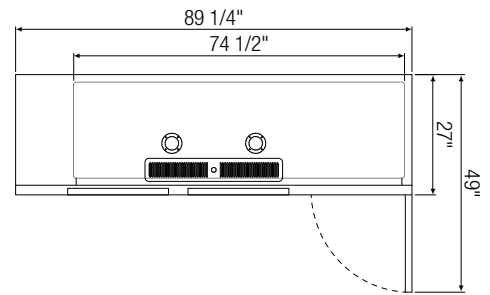

▲ EBD4(SS)

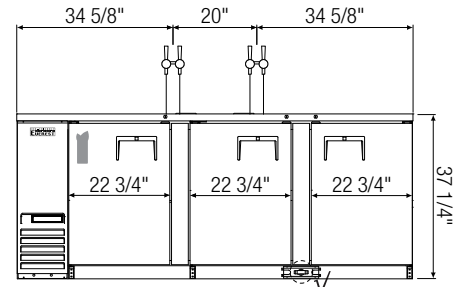

Model	Ref/ Frz/ Dual	# of Doors	# of 1/2 Barrels	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H
EBD1	Ref	1	1	8	1/5	1,655	R290	115-60-1	2.5	167	23 1/2	32	39 3/8 ^a
EBD2(SS)	Ref	2	2	20	1/4+	1,926	R290	115-60-1	3.5	282	57 3/4	27	37 1/4
EBD3	Ref	2	3	24	1/4+	1,926	R290	115-60-1	3.5	320	68	27	37 1/4
EBD4(SS)	Ref	3	4	32	1/3	2,311	R290	115-60-1	2.5	405	89 1/4	27	37 1/4


[†] : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

^a : Height includes 5" for casters.

Da, Db : Interior Depth Ha, Hb : Interior Height

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

24" DEEP DIRECT DRAW KEG REFRIGERATORS

EBD - Series • EBD2-24 • EBD3-24 • EBD4-24



▲ EBD2-24



▲ EBD3-24



▲ EBD4-24



Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Textured laminate, black vinyl exterior with galvanized steel interior.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Draft Arms

- NSF certified, 3" diameter insulated stainless steel draft arm with matching air distributor. Two single faucet draft arms for models EBD2-24 and EBD3-24. One single faucet and one dual faucet draft arms for model EBD4-24.

Temperature Control





- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F.
- Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options


- Dual faucet draft arms and matching air distributors.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions

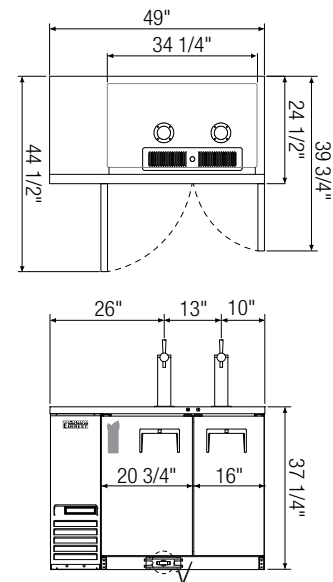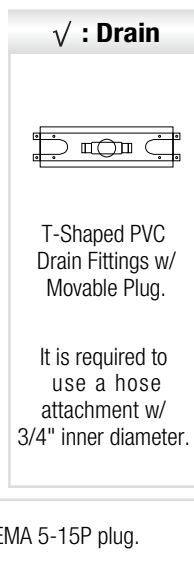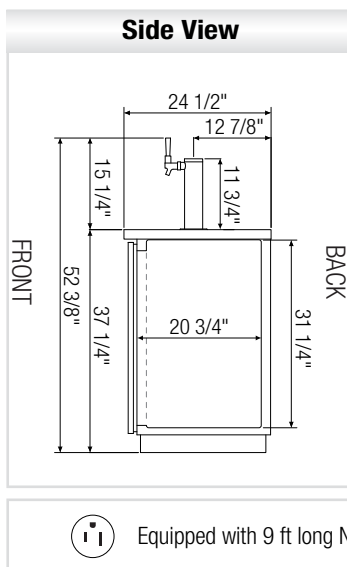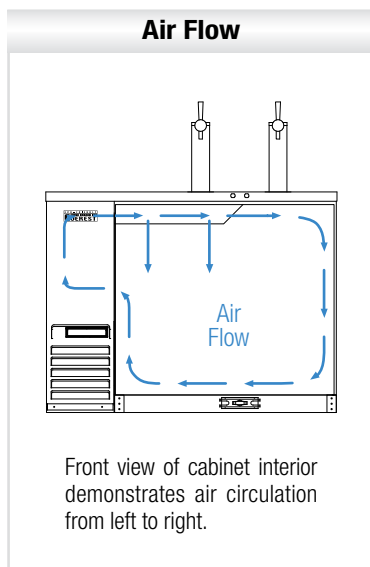


▲ **EBDS2-24**

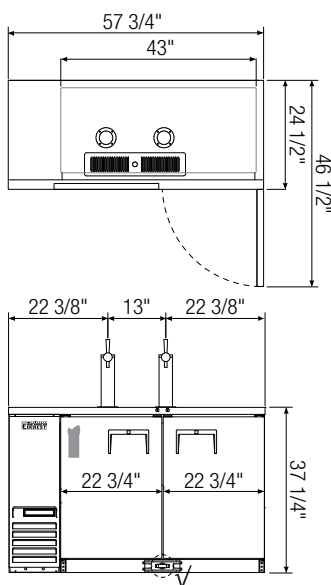

▲ **EBD2-24**

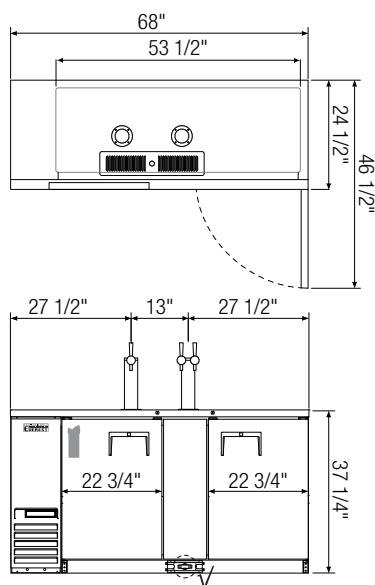

▲ **EBD3-24**

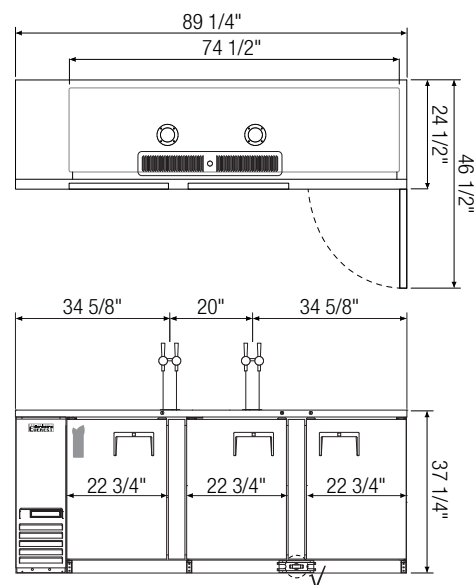

▲ **EBD4-24**

Model	Ref/ Frz/ Dual	# of Doors	Capacity & Size of Barrels	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H
EBDS2-24	Ref	2	(1) 1/2 (1) 1/4 slim	13	1/4+	1,926	R290	115-60-1	3.5	266	49	24 1/2	37 1/4
EBD2-24	Ref	2	(2) 1/2	17	1/4+	1,926	R290	115-60-1	3.5	272	57 3/4	24 1/2	37 1/4
EBD3-24	Ref	2	(3) 1/2	20	1/4+	1,926	R290	115-60-1	3.5	299	68	24 1/2	37 1/4
EBD4-24	Ref	3	(4) 1/2	28	1/3	2,311	R290	115-60-1	2.5	390	89 1/4	24 1/2	37 1/4

[†] : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

BACK BAR & DIRECT DRAW KEG REFRIGERATORS

EBD - Series • EBD2-BB • EBD2-BBG • EBD3-BB • EBD3-BBG



▲ EBD2-BB



▲ EBD2-BBG



▲ EBD3-BB



▲ EBD3-BBG

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Textured laminate, black vinyl exterior with galvanized steel interior and 1 3/4" thick high density polyurethane insulation for solid doors. Black PVC frames with low emissivity double glass panes for glass doors.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles for solid doors. High strength, die-cast door handles for glass doors.
- Pre-installed door locks keep your items safe from theft.

Draft Arms

- NSF certified, 3" diameter insulated stainless steel draft arm with single faucet and matching air distributor.

Shelving

- Two epoxy coated, steel wire shelves.
- Height adjustable stainless steel clips.

Temperature Control





- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F.
- Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options


- Dual faucet draft arms and matching air distributors.
- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions

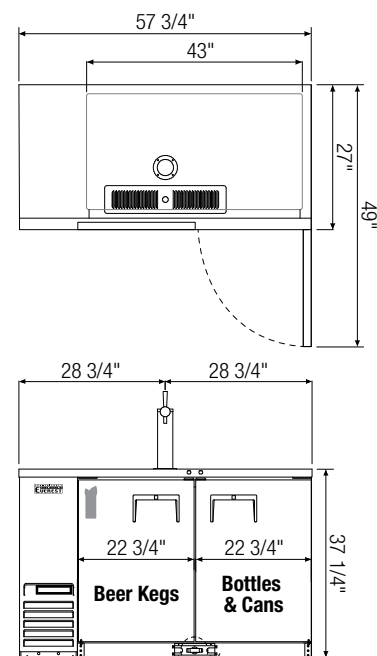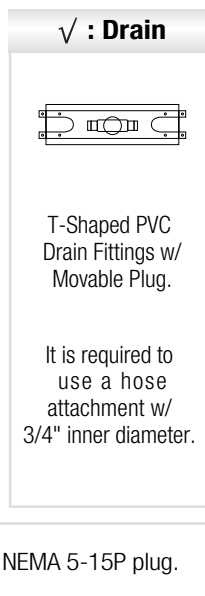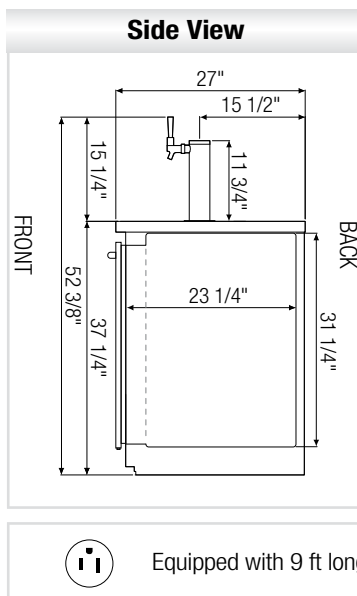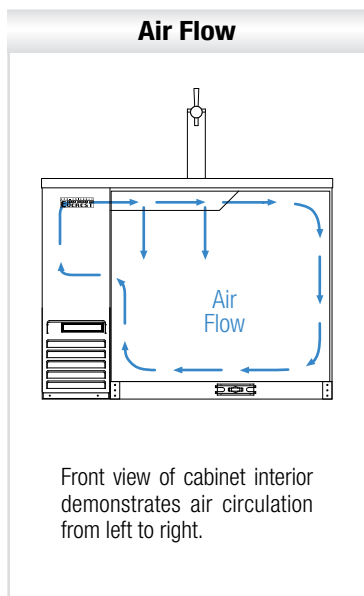


▲ EBD2-BB

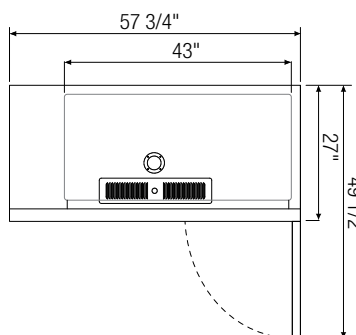




▲ EBD2-BBG

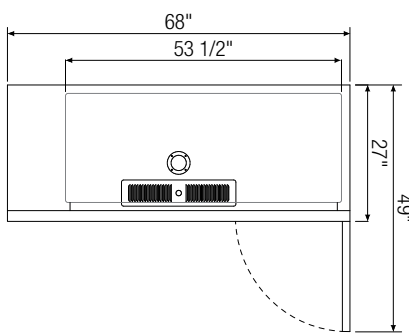

▲ EBD3-BB

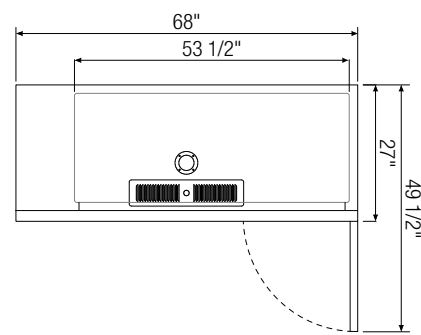

▲ EBD3-BBG

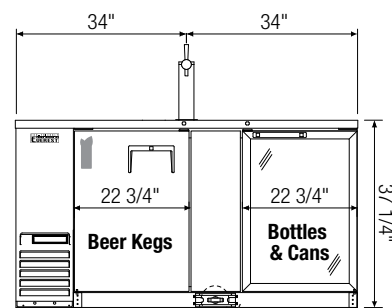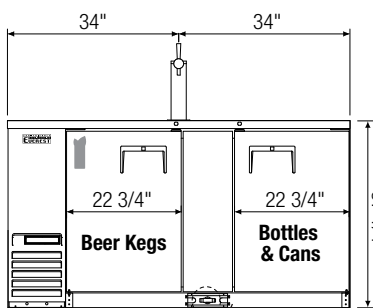

Model	Ref/ Frz/ Dual	# of Doors	Capacity & Size of Barrels	Capacity (Cu. Ft.)	HP	Capacity		Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
						12 oz. Cans	12 oz. Bottles						L	D	H
EBD2-BB	Ref	2 (SD)	(1) 1/2	20	1/4+	280	192	R290	2	115-60-1	3.5	287	57 3/4	27	37 1/4
EBD2-BBG	Ref	1 (SD) 1 (GD)	(1) 1/2	20	1/4+	280	192	R290	2	115-60-1	3.5	304	57 3/4	27*	37 1/4
EBD3-BB	Ref	2 (SD)	(1) 1/2 (1) 1/4-Slim	24	1/4+	360	240	R290	2	115-60-1	3.5	327	68	27	37 1/4
EBD3-BBG	Ref	1 (SD) 1 (GD)	(1) 1/2 (1) 1/4-Slim	24	1/4+	360	240	R290	2	115-60-1	3.5	344	68	27*	37 1/4

*: Depth does not include protruding door handles.

Ref = Refrigerator | (SD) = Solid Door | (GD) = Glass Door

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

24" DEEP BACK BAR & DIRECT DRAW KEG REFRIGERATORS

EBD - Series • EBD2-BB-24 • EBD3-BB-24 • EBD3-BB-24



▲ EBD2-BB-24



▲ EBD2-BB-24



▲ EBD3-BB-24

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Textured laminate, black vinyl exterior with galvanized steel interior.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft.

Draft Arms

- NSF certified, 3" diameter insulated stainless steel draft arm with single faucet and matching air distributor.

Shelving

- Two epoxy coated, steel wire shelves.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F.
- Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


Options

- Dual faucet draft arms and matching air distributors.
- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions

Air Flow

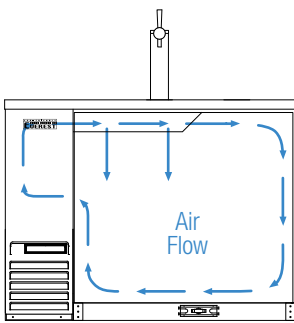


Front view of cabinet interior demonstrates air circulation from left to right.

Side View

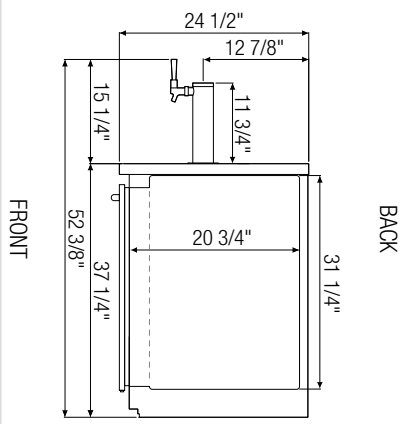


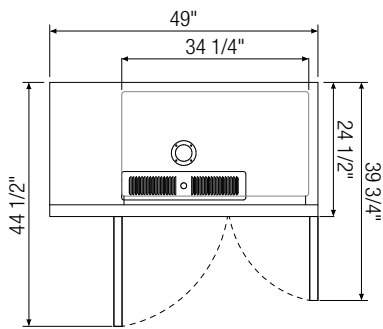
√ : Drain




T-Shaped PVC Drain Fittings w/ Movable Plug.

It is required to use a hose attachment w/ 3/4" inner diameter.


 Equipped with 9 ft long NEMA 5-15P plug.






▲ EBD3-BB-24

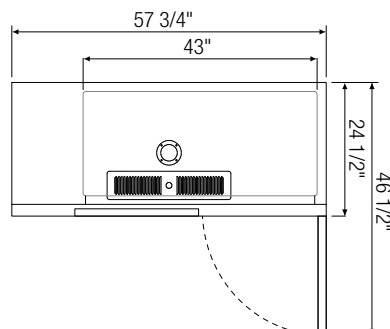

▲ EBD2-BB-24

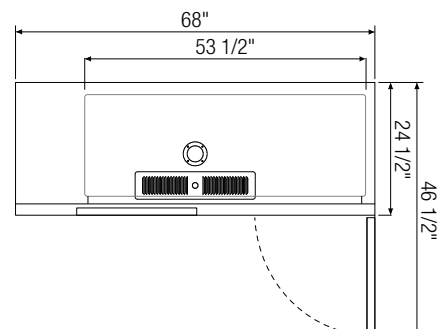

▲ EBD3-BB-24

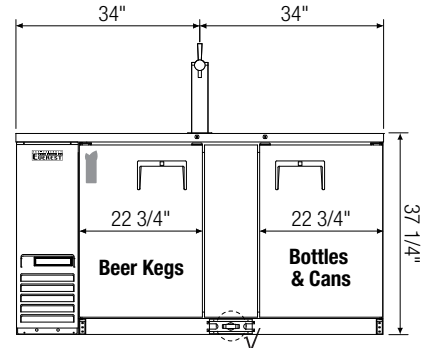

Model	Ref/ Frz/ Dual	# of Doors	# of Shelves	Capacity (Cu. Ft.)	Capacity & Size of Barrels	HP	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D	H
EBDS2-BB-24	Ref	2	2	13	(1) 1/2	1/4+	R290	175	126	115-60-1	3.5	270	49	24 1/2	37 1/4
EBD2-BB-24	Ref	2	2	17	(1) 1/2	1/4+	R290	245	168	115-60-1	3.5	276	57 3/4	24 1/2	37 1/4
EBD3-BB-24	Ref	2	2	20	(1) 1/2 (1) 1/4-Slim	1/4+	R290	315	210	115-60-1	3.5	311	68	24 1/2	37 1/4

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

24" DEEP GLASS DOOR BACK BAR & DIRECT DRAW KEG REFRIGERATORS

EBD - Series • EBD2-BBG-24 • EBD3-BBG-24 • EBD3-BBG-24



▲ EBD2-BBG-24



▲ EBD2-BBG-24



▲ EBD3-BBG-24

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

- Textured laminate, black vinyl exterior with galvanized steel interior and 1 3/4" thick high density polyurethane insulation for solid doors. Black PVC frames with low emissivity double glass panes for glass doors.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles for solid doors. High strength, die-cast door handles for glass doors.
- Pre-installed door locks keep your items safe from theft.

Draft Arms

- NSF certified, 3" diameter insulated stainless steel draft arm with single faucet and matching air distributor.

Shelving

- Two epoxy coated, steel wire shelves.
- Height adjustable stainless steel clips.

Temperature Control





- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F.
- Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options


- Dual faucet draft arms and matching air distributors.
- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions

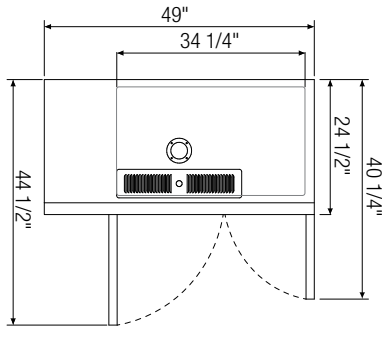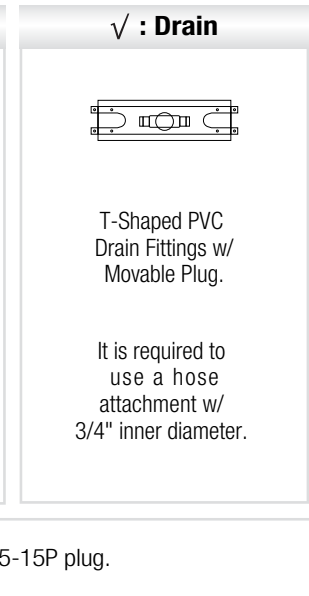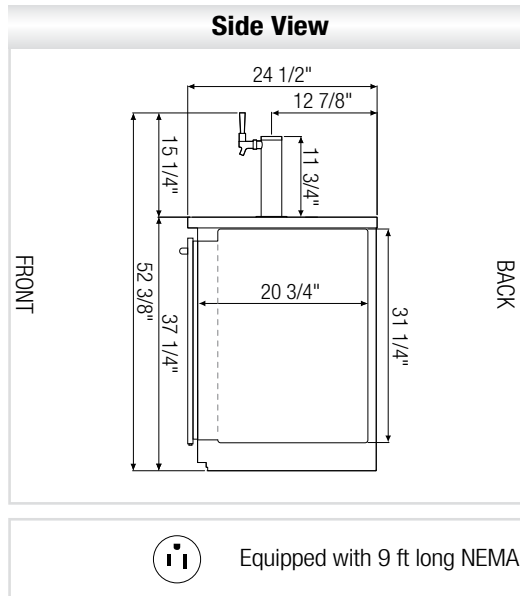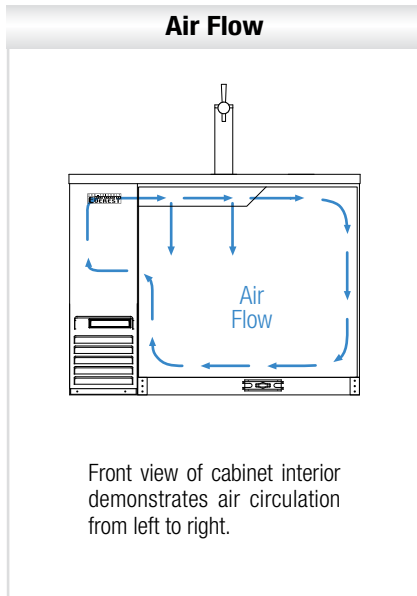




▲ EBDS2-BBG-24

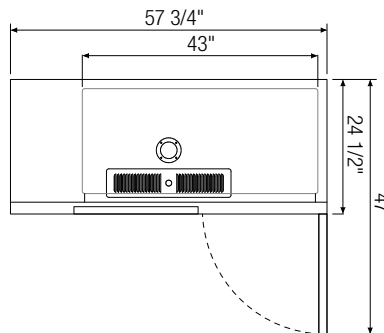

▲ EBD2-BBG-24

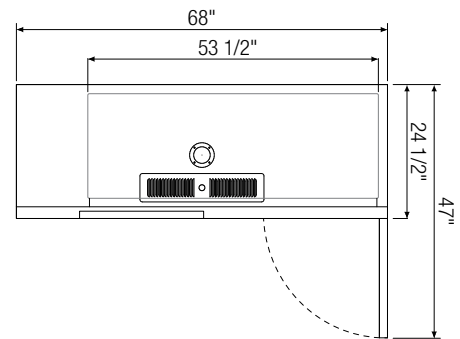

▲ EBD3-BBG-24

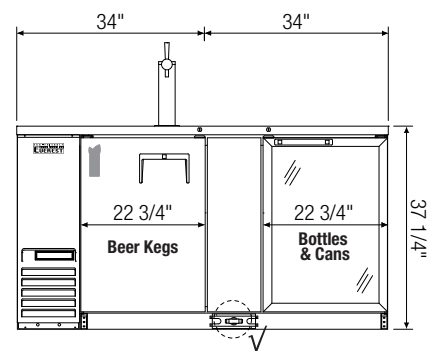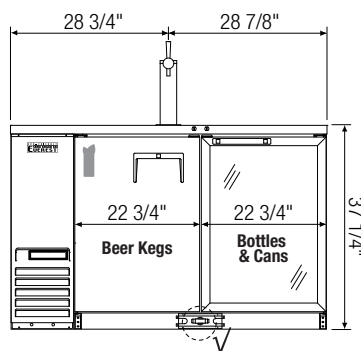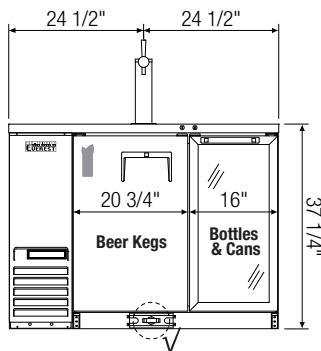

Model	Ref/ Frz/ Dual	# of Doors	# of Shelves	Capacity (Cu. Ft.)	Capacity & Size of Barrels	HP	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
								12 oz. Cans	12 oz. Bottles				L	D	H
EBDS2-BBG-24	Ref	1 (SD) 1 (GD)	2	13	(1) 1/2	1/4+	R290	175	126	115-60-1	3.5	279	49	24 1/2	37 1/4
EBD2-BBG-24	Ref	1 (SD) 1 (GD)	2	17	(1) 1/2	1/4+	R290	245	168	115-60-1	3.5	286	57 3/4	24 1/2	37 1/4
EBD3-BBG-24	Ref	1 (SD) 1 (GD)	2	20	(1) 1/2 (1) 1/4-Slim	1/4+	R290	315	210	115-60-1	3.5	326	68	24 1/2	37 1/4

Ref = Refrigerator | (SD) = Solid Door | (GD) = Glass Door

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

CLUB TOP DIRECT DRAW KEG REFRIGERATORS

Combination of Draft Beer Dispenser & Chilled Glass Storage

EBD - Series • EBD2-CT • EBD3-CT • EBD4-CT



▲ EBD2-CT



▲ EBD3-CT



▲ EBD4-CT

Cabinet Construction

- Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Compact, easy-access club top compartment.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP).
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors & Lids

- Textured laminate, black vinyl exterior and galvanized steel interior with 1 3/4" thick high density polyurethane insulation for doors. Heavy duty stainless steel exterior and galvanized steel interior with 3/4" thick high density polyurethane insulation for cub top lids.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength door handles are recessed for doors and raised for club top lids.
- Pre-installed door locks keep your items safe from theft.

Shelving (Chilled Glass Storage)

- One epoxy coated, steel wire shelf.
- Height adjustable stainless steel clips.

Draft Arms

- NSF certified, 3" diameter insulated stainless steel draft arm with matching air distributor. Two single faucet draft arms for model EBD2-CT. One single faucet and one dual faucet draft arms for model EBD3-CT. Two dual faucet draft arms for model EBD4-CT.

Temperature Control



- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options


- Dual faucet draft arms and matching air distributors.
- Additional shelving.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.




Dimensions

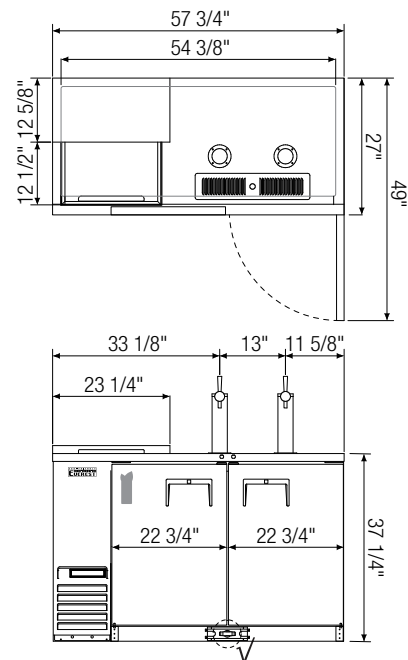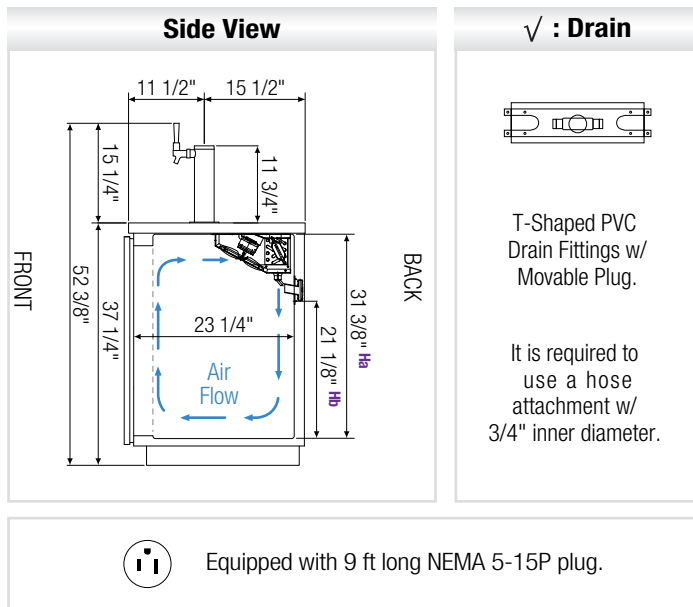

▲ EBD2-CT

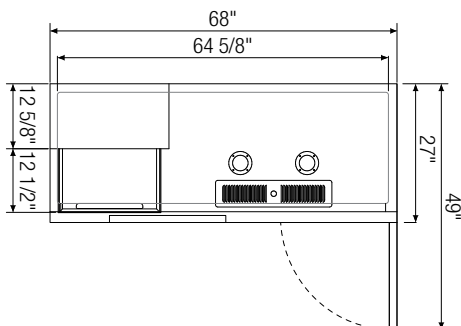

▲ EBD3-CT

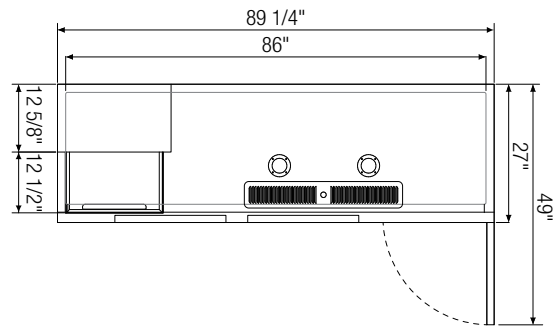

▲ EBD4-CT

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu. Ft.)	Capacity & Size of Barrels	HP	BTU/HR [†]	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
												L	D	H
EBD2-CT	Ref	2	20	(2) 1/2	1/4+	1,926	R290	1	115-60-1	3.5	296	57 3/4	27	37 1/4
EBD3-CT	Ref	2	24	(3) 1/2	1/4+	1,926	R290	1	115-60-1	3.5	335	68	27	37 1/4
EBD4-CT	Ref	3	32	(4) 1/2	1/3	2,311	R290	1	115-60-1	2.5	415	89 1/4	27	37 1/4

[†] : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ref = Refrigerator

Ha, Hb : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

HORIZONTAL BOTTLE COOLERS

EBC - Series

• EBC37 • EBC50 • EBC65 • EBC80 • EBC95



▲ EBC37



▲ EBC50



▲ EBC65



▲ EBC80



▲ EBC95

Cabinet Construction

- Heavy duty stainless steel countertop and rails with textured laminate, black vinyl exterior.
- Galvanized steel interior.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Bottle Cap Opener

- Front mounted bottle cap opener and cap catcher are removable for ease of cleaning.

Lids

- Heavy duty stainless steel exterior and galvanized steel interior.
- 3/4" thick high density polyurethane insulation.
- Removable ratchet locks keep your items safe from theft.

Shelving

- Horizontal epoxy coated, steel wire shelves for bottom air circulation (see table for quantity).
- Vertical epoxy coated, steel wire bin dividers (see table for quantity).

Temperature Control


- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F.
- Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options


- Additional bin dividers.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



Dimensions

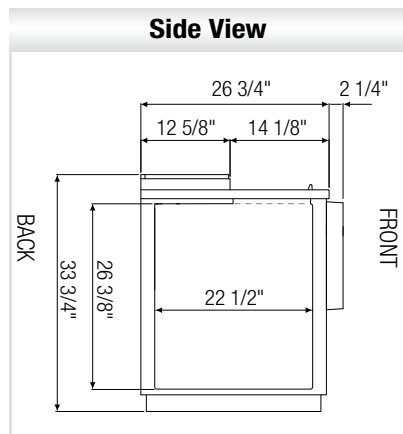

✓ : Drain





T-Shaped PVC
Drain Fittings w/
Movable Plug.


It is required to
use a hose
attachment w/
3/4" inner diameter.




Lids come standard with ratchet locks.




Air Flow




Equipped with 9 ft
long NEMA
5-15P plug.




▲ EBC37




▲ EBC50

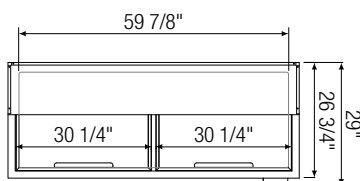




▲ EBC65

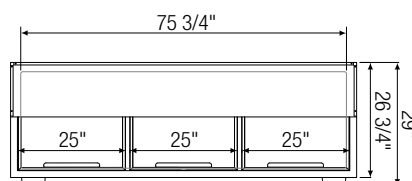

▲ EBC80

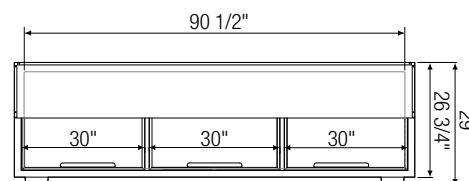

▲ EBC95

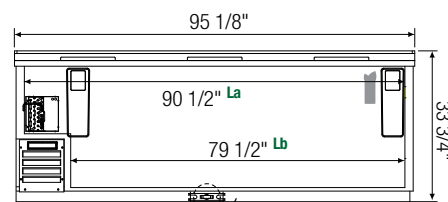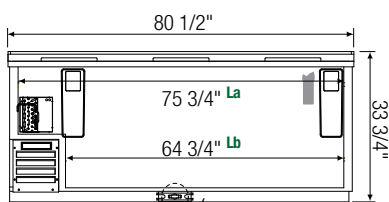

Model	Ref/ Frz/ Dual	Capacity (Cu. Ft.)	# of Lids	HP	Refrigerant	# of Bin Dividers	Capacity		# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
							12 oz. Cans	12 oz. Bottles					L	D*	H
EBC37	Ref	11	1	1/4+	R290	2	348	264	1	115-60-1	3.50	197	36 3/4	26 3/4	33 3/4
EBC50	Ref	15	2	1/4+	R290	3	576	396	2	115-60-1	3.50	235	49 1/2	26 3/4	33 3/4
EBC65	Ref	21	2	1/4+	R290	4	780	528	2	115-60-1	3.50	285	64 5/8	26 3/4	33 3/4
EBC80	Ref	26	3	1/3	R290	5	1,008	720	3	115-60-1	2.50	348	80 1/2	26 3/4	33 3/4
EBC95	Ref	31	3	1/3	R290	6	1,320	900	3	115-60-1	2.50	421	95 1/8	26 3/4	33 3/4

*: Depth does not include bottle cap opener with integrated receptacle.

Ref = Refrigerator

La, Lb : Interior Length

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated
Energy Efficiency information.

SOLID SLIDE LID GLASS & PLATE CHILLERS

EGC - Series • EGC37 • EGC50 • EGC65



▲ EGC37



▲ EGC50



▲ EGC65

Cabinet Construction

- Heavy duty stainless steel countertop and rails with textured laminate, black vinyl exterior.
- Galvanized steel interior.
- 1 3/4" thick high density polyurethane insulation.
- Built-in caster thread receptacles for all models.

Refrigeration System

- Bottom mounted, self-contained and retractable condensing unit uses environmentally friendly, EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and require no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct system ensures optimal circulation of cold air.
- Time-initiated and temperature-terminated defrost cycle with defrost heater.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Lids

- Heavy duty stainless steel exterior and galvanized steel interior.
- 3/4" thick high density polyurethane insulation.
- Removable ratchet locks keep your items safe from theft.

Shelving

- Two levels of epoxy coated, steel wire shelves slide horizontally for easy storage of glasses and plates (see table for quantity).

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, -4°F.
- Temperature setting range from -10°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.


Options

- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.






Dimensions

Side View

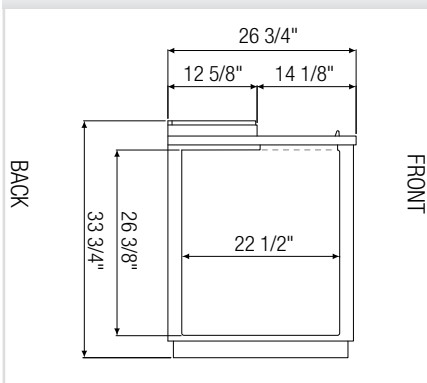


Air Flow



▲ **EGC37**

✓ : **Drain**



T-Shaped PVC Drain Fittings w/ Movable Plug.



It is required to use a hose attachment w/ 3/4" inner diameter.





Lids come standard with ratchet locks.



Equipped with 9 ft long NEMA 5-15P plug.

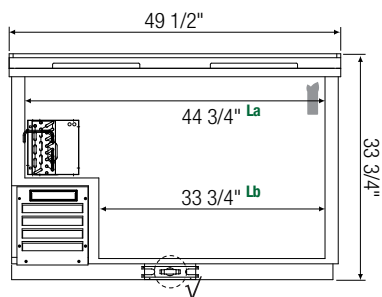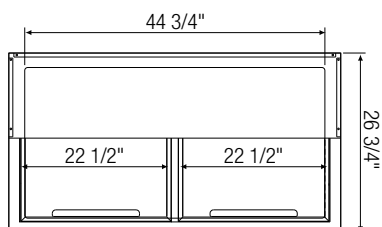

▲ **EGC50**

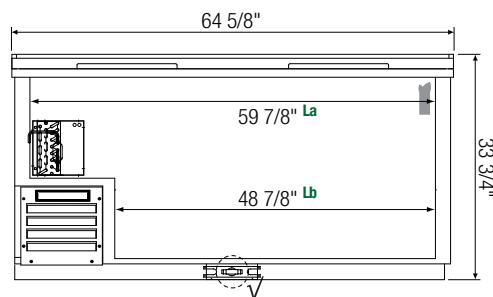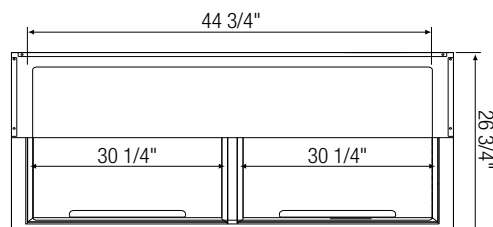

▲ **EGC65**

Model	Ref/ Frz/ Dual	# of Lids	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Shelves	Capacity (8" Mugs)	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
												L	D	H
EGC37	Frz	1	11	1/2	1,979	R290	3	160	115-60-1	5	209	36 3/4	26 3/4	33 3/4
EGC50	Frz	2	15	1/2	1,979	R290	5	230	115-60-1	5	263	49 1/2	26 3/4	33 3/4
EGC65	Frz	2	21	1/2	1,979	R290	7	290	115-60-1	5	314	64 5/8	26 3/4	33 3/4

[†] : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Frz = Freezer

La, Lb : Interior Length

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.

NITRO COLD BREW COFFEE DISPENSER

ECF - Series • ECF1



▲ ECF1

Cabinet Construction

- Heavy duty stainless steel countertop and rail with textured laminate, black vinyl exterior.
- Galvanized steel interior walls and high quality stainless steel floor.
- 1 3/4" thick high density polyurethane insulation.
- Four pre-installed 5" swivel casters with locks on front set.

Refrigeration System

- Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Lighting

- Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors

- Tinted stainless steel exterior with galvanized steel interior.
- 1 3/4" thick high density polyurethane insulation.
- Snap-in magnetic door gasket make cleaning and replacement an easy process.
- High strength, recessed door handles.
- Pre-installed door locks keep your items safe from theft

Draft Arms

- NSF certified, 3" diameter insulated stainless steel draft arm with single stout faucet complete with ball lock fitting.
- One 2-way air distributor.
- One 22 cubic feet aluminum nitrogen gas tank.
- One dual gauge nitrogen regulator with shutoff valve and ball lock fitting.
- NSF certified 5 gallon ball lock cornelius keg.



Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F.
- Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- Dual faucet draft arms and matching air distributors.
- 3" or 5" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.



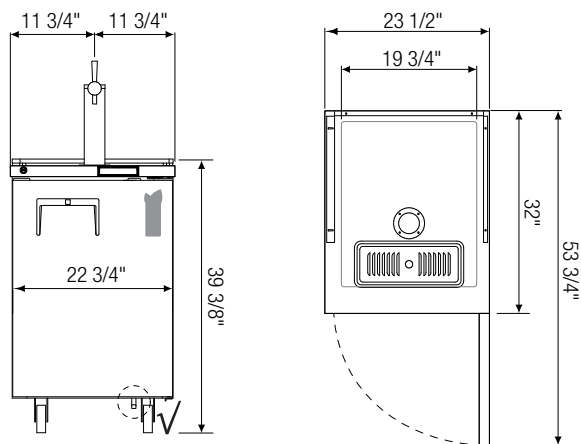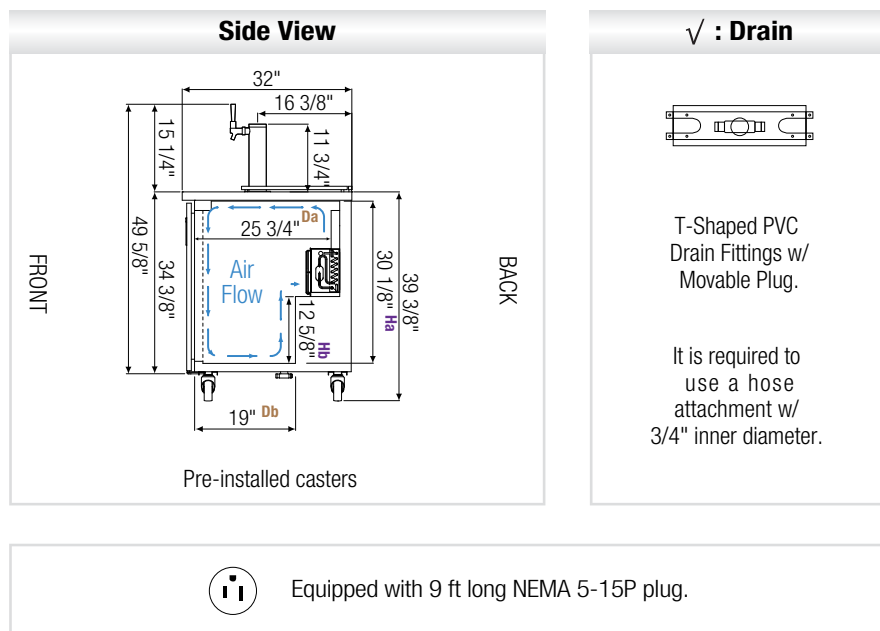

▲ ECF1

Model	Ref/ Frz/ Dual	# of Doors	# of 1/2 Barrels	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D	H ^a
ECF1	Ref	1	1	8	1/5	1,655	R290	115-60-1	2.5	177	23 1/2	32	39 3/8

[†] : Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

^a : Height includes 5" for casters.

Da, Db : Interior Depth **Ha, Hb** : Interior Height

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.





Please visit our website for updated
Energy Efficiency information.



Standard Features & Benefits

Cold Air Hose for Keg Refrigerators & Coffee Dispensers

Beer or coffee is enjoyed cold from the first drop to the last through two effective cooling processes. The first process is through cabinet cooling where an oversized evaporator coil and high velocity fan keep the beer or coffee kegs at a steady low temperature.

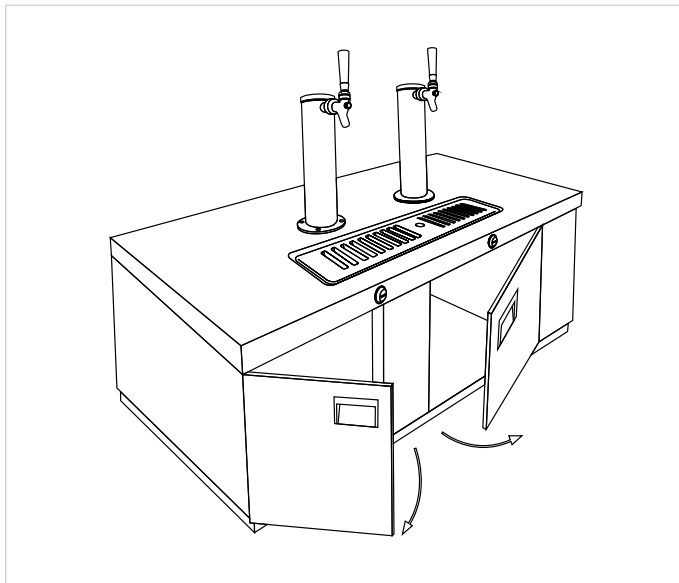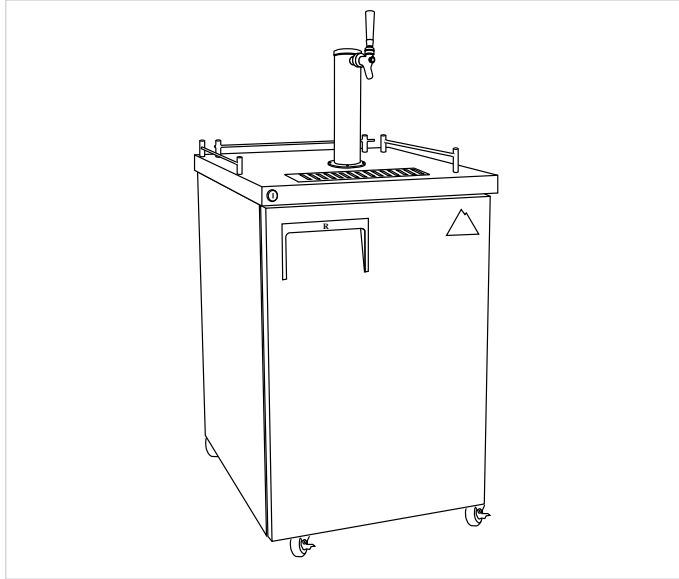

The second process is through focused draft tower cooling where a wide-diameter air hose routes refrigerated air from the evaporator housing directly into the tower receptacle. The towers are made of 304 stainless steel, heavily insulated and tightly sealed for concentrated, long term cooling.

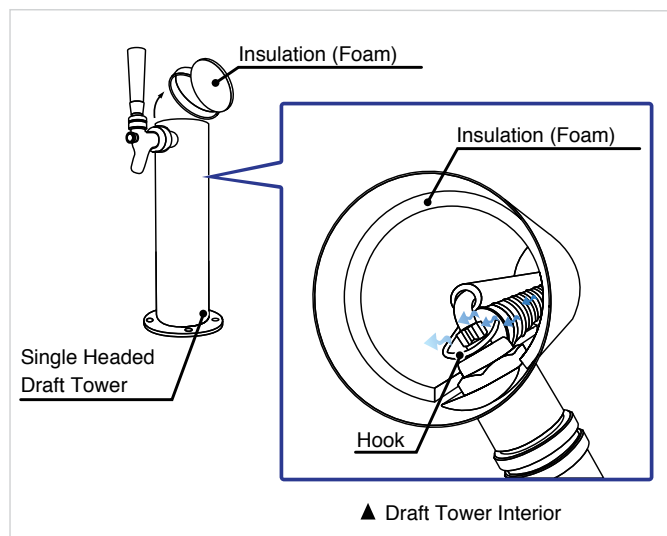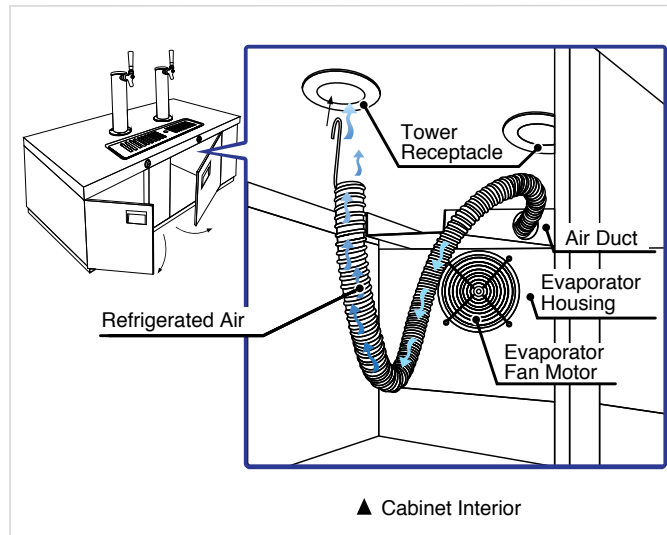

Countertop Refrigerated Display Cases

Self-Contained Condensing Unit - *ESC Series*

Reference Model: ESC59L

The expansive, curved glass of the Countertop Refrigerated Display Case series provides a clear, inviting view of any showcased merchandise. The angled window and sleek stainless steel interior is as elegant as it is practical for purposes of sanitation.



Exterior



Interior

1: Large Display

Wide single piece, curved glass window is angled to reflect overhead lighting and provide the best presentation of food items.


2: Large Vents

Rear and side louver intake / exhaust promote efficient ventilation.


3: Adjustable Food Trays

Feature two mounting styles which offer medium to low temperature coverage. Made of durable, food grade plastic.

- Medium Temperature Application (Top Level)



- Low Temperature Application (Bottom Level)




Blizzard R290 Condensing Unit*

Uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Right or left mounted to suit installation preference.

ECM Condenser Fan Motor*

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

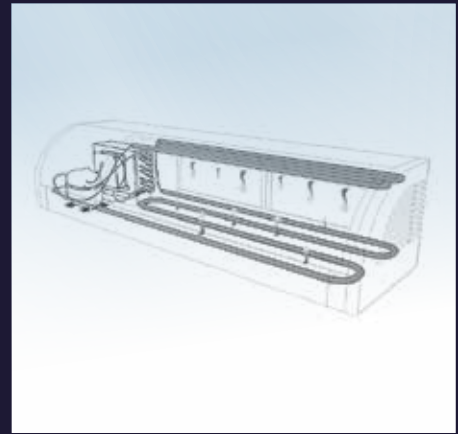

4: Removable Doors

6 ¾" high sliding glass doors are removable for storage accessibility and ease of cleaning.

5: Top to Bottom Evaporator Tubes

Provide balanced, all-around interior cooling. Top evaporator is tri-looped, nickel plated copper tube. Bottom evaporator is tri-looped copper tube underneath the stainless steel floor.

6: Exterior Drain Line



Detaches and attaches to rear of unit for easy cleaning of display interior.

7: Washable Interior

Stainless steel floor interior has rounded edges and rounded corners and two drain holes for ease of cleaning.

8: Washable Air Filter

Durable framed mesh traps dust and grease. Removable and detergent safe for easy cleaning.



COUNTERTOP REFRIGERATED DISPLAY CASES

Self-Contained Condensing Unit

ESC - Series • ESC47L/R • ESC59L/R • ESC71L/R • ESC83L/R



▲ **ESC47L** (Left Compressor Mount)
ESC47R (Right Compressor Mount, shown in picture)



▲ **ESC59L** (Left Compressor Mount)
ESC59R (Right Compressor Mount, shown in picture)



▲ **ESC71L** (Left Compressor Mount)
ESC71R (Right Compressor Mount, shown in picture)



▲ **ESC83L** (Left Compressor Mount)
ESC83R (Right Compressor Mount, shown in picture)

Cabinet Construction

- Wide single piece, curved glass display window offer a panoramic view of items.
- Heavy duty, ABS plastic exterior casing.
- Black coated steel housing for condensing unit.
- Stainless steel floor interior has rounded edges has rounded corners and two drain holes for ease of cleaning.
- High density, foamed-in-place insulation

Refrigeration System

- Self-contained condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Right or left mounted to suit installation preference.
- Rear condenser airflow intake and side louver exhaust promote efficient ventilation.
- Top to bottom evaporator tubes provide balanced cooling. Top evaporator is tri-looped and nickel plated copper tube. Bottom evaporator is located under the stainless steel floor.
- Corrosion-resistant condenser coil.
- Electronically commuted (ECM) condenser fan motor achieve rapid cooling with less energy consumption.
- Removable and washable condenser coil air filter.
- Exterior on/off power switch.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Doors

- 6 ¾" high removable sliding glass doors for storage accessibility and ease of cleaning.


Trays

- Durable plastic trays have two mounting styles which offer medium to low temperature coverage.


Temperature Control

- Factory preset temperature of 38°F at an ambient temperature of 80°F. (no controls equipped)
- NSF certified thermometer.

How to Use Plastic Sanitary Trays



Medium Temperature Application



Lower Temperature Application


Sanitary plastic trays offer medium to low temperature range application with its dual placement function.




5 YEAR Compressor
3 YEAR Parts & Labor

Dimensions


Side View

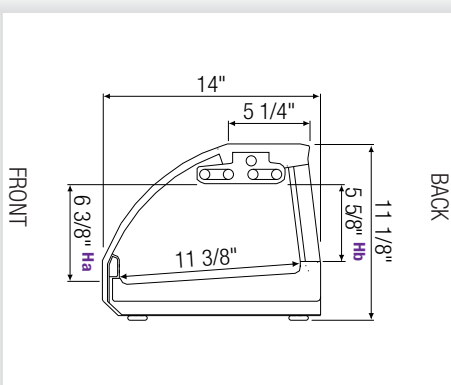


Equipped with 9 ft long NEMA 5-15P plug.




▲ **ESC47L**

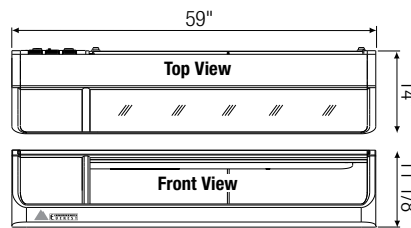


▲ **ESC59L**




▲ **ESC47R**

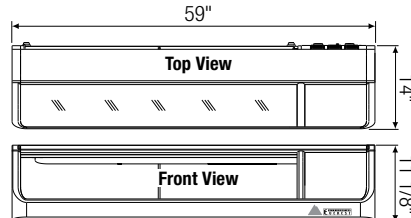


▲ **ESC59R**

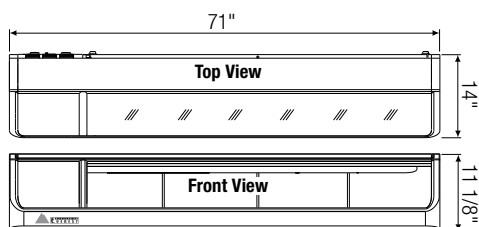


▲ **ESC71L**

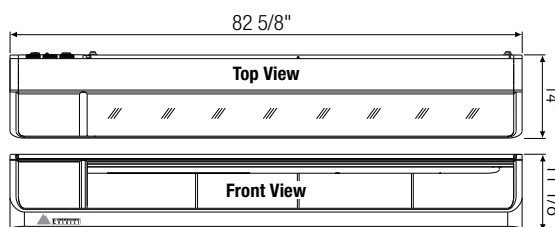

▲ **ESC83L**

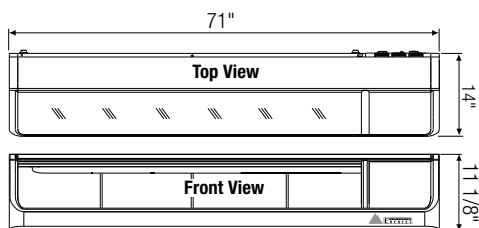

▲ **ESC71R**

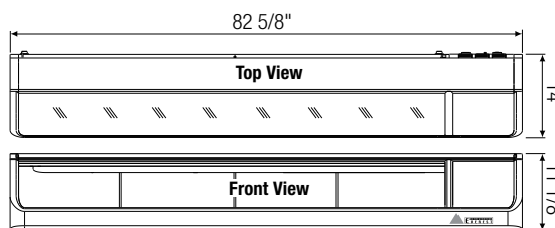

▲ **ESC83R**

Model	Ref/ Frz/ Dual	Compressor Mount	# of Rear Doors	Capacity (Cu. Ft.)	HP	BTU/HR [†]	Refrigerant	# of Trays	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
												L	D*	H
ESC47L	Ref	Left	2	1.5	1/8	1,211	R290	3	115-60-1	1.5	105	47 1/4	14	11 1/8
ESC47R	Ref	Right	2	1.5	1/8	1,211	R290	3	115-60-1	1.5	105	47 1/4	14	11 1/8
ESC59L	Ref	Left	2	2	1/8	1,211	R290	4	115-60-1	1.5	112	59	14	11 1/8
ESC59R	Ref	Right	2	2	1/8	1,211	R290	4	115-60-1	1.5	112	59	14	11 1/8
ESC71L	Ref	Left	4	2.5	1/8	1,211	R290	5	115-60-1	1.5	130	71	14	11 1/8
ESC71R	Ref	Right	4	2.5	1/8	1,211	R290	5	115-60-1	1.5	130	71	14	11 1/8
ESC83L	Ref	Left	4	3	1/8	1,211	R290	6	115-60-1	1.5	143	82 5/8	14	11 1/8
ESC83R	Ref	Right	4	3	1/8	1,211	R290	6	115-60-1	1.5	143	82 5/8	14	11 1/8

★: Depth includes 1/4" for drain pipe at back of unit.

†: Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C).

Ha, Hb : Interior Height

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity () is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.




Please visit our website for updated
Energy Efficiency information.

Standard Features & Benefits

Top to Bottom Evaporator Coil for Countertop Refrigerated Display Cases


Countertop refrigerated display cases feature a unique evaporator coil system that spans the ceiling and floor of the product interior. The top evaporator is corrosion resistant nickel plated copper tubing located on the cabinet ceiling. The bottom evaporator is copper tubing with corrosion resistant coating located under the stainless steel floor. The top to bottom coil system provides balanced cooling and expansive temperature coverage to keep food items fresher for longer.

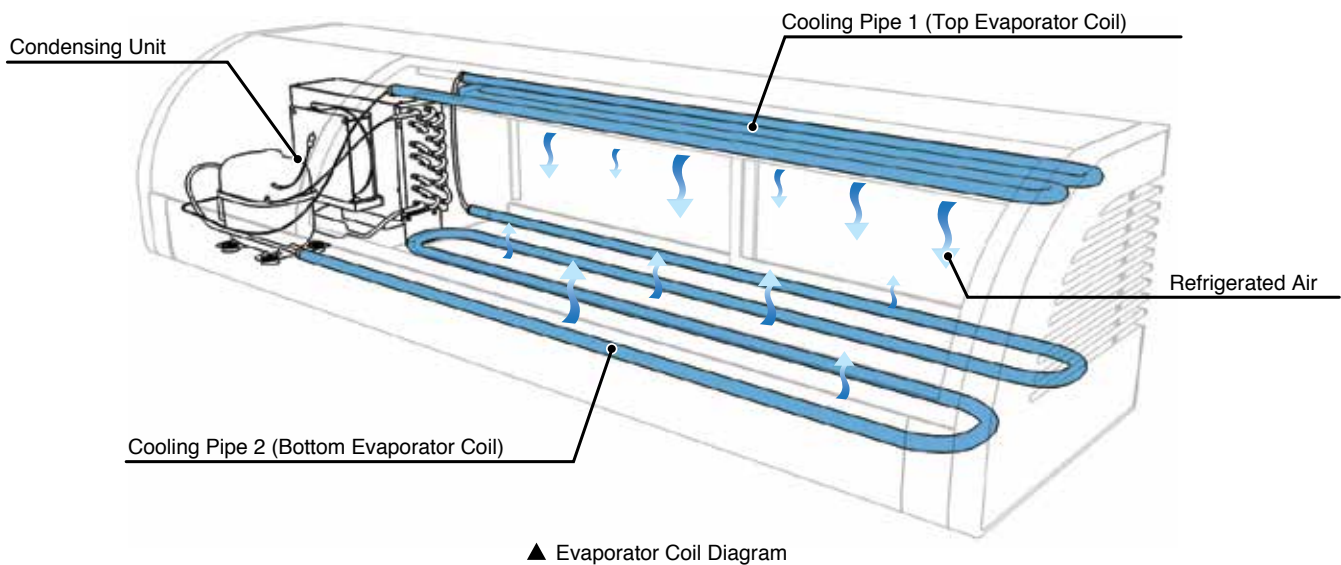


Adjustable Food Trays

Feature two mounting styles which offer medium to low temperature coverage. Made of durable, food grade plastic.

Medium Temperature Application (Top Level)

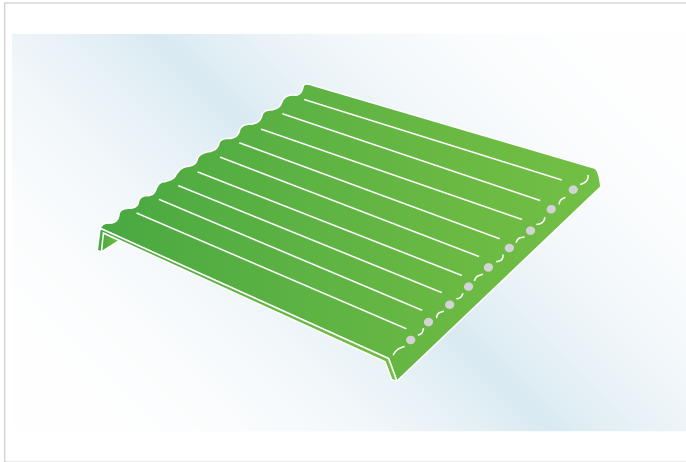

Low Temperature Application (Bottom Level)

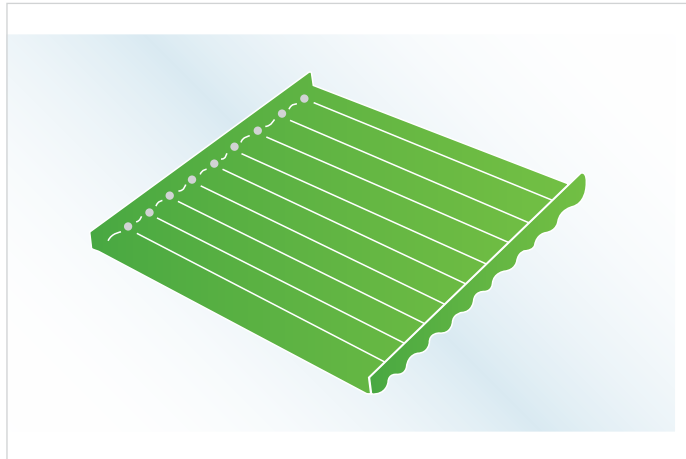

Full Product Line

Upright Reach-Ins

Top Mount



Solid Door Refrigerators
Solid Door Freezers
Solid Door Dual Temps
Door & Drawer Combo Refrigerators
 \ Dual Temps
Glass Door Refrigerators
Glass & Solid Half-Door Refrigerators
 \ Dual Temps



Bottom Mount

Solid Door Refrigerators
Solid Door Freezers
Solid Door Dual Temps
Glass Door Refrigerators



Dry Ager and Thawing Refrigerator

Merchandisers & Chromatography



Bottom Mount

Single Swing Glass Door Refrigerators
Multiple Swing Glass Door Refrigerators
Sliding Glass Door Refrigerators
Swing Glass Door Freezers
Chromatography Swing Door Refrigerators
Chromatography Sliding Door Refrigerators

Undercounters



Back Mount

Solid Door Refrigerators
Drawered Refrigerators
Solid Door Freezers



Side Mount

Solid Door Refrigerators
Solid Door Freezers
Solid Door Dual Temps
Sliding Glass Door Refrigerators

Chef Bases



Side Mount

Drawered Refrigerators

Food Prep. Tables



Back Mount

Sandwich Prep. Table Refrigerators
Drawered Sandwich Prep. Table Refrigerators
Mega-Top Sandwich Prep. Table Refrigerators
Open Top Prep. Table Refrigerators



Side Mount

Sandwich Prep. Table Refrigerators
Pizza Prep. Table Refrigerators
Drawered Pizza Prep. Table Refrigerators

Bar Equipment



Back Bar Coolers

Solid Door Back Bar Coolers
24" Deep Solid Door Back Bar Coolers
Glass Door Back Bar Coolers
24" Deep Glass Door Back Bar Coolers
24" Deep Glass Sliding Door Back Bar Coolers



Direct Draw Keg Refrigerators

Direct Draw Keg Refrigerators
24" Deep Direct Draw Keg Refrigerators
Back Bar & Direct Draw Keg Refrigerators
24" Deep Back Bar
 & Direct Draw Keg Refrigerators
24" Deep Glass Back Bar
 & Direct Draw Keg Refrigerators
Club Top Direct Draw Keg Refrigerators



Horizontal Bottle Coolers



Solid Slide Lid Glass & Plate Chillers



Nitro Cold Brew Coffee Dispenser

Countertop Refrigerated Display Cases



Self-Contained

Sushi Cases

Three (3) Year Labor & Parts Warranty

EVEREST warrants to the first purchaser of every new EVEREST unit, the cabinet and all parts thereof, to be free from defects in material or workmanship, under normal and proper use and maintenance service as specified by EVEREST and upon proper installation and start-up in accordance with the instruction packet supplied with each unit. Our obligation under this warranty is limited to a period of three (3)* years from the date of original installation or thirty six (36)* months after shipment date from EVEREST, whichever occurs first (applicable to units purchased after July 1, 2014). Any part covered under this warranty that is determined by EVEREST to have been defective within three (3)* years of original installation or thirty six (36)* months after shipment date from the manufacturer, whichever occurs first, is limited to the repair or replacement**, including labor charges, of defective parts or assemblies. The labor warranty shall include standard straight time labor charges and reasonable travel time, as determined by EVEREST.

Five (5) Year Compressor Warranty

In addition to the warranty set forth above, EVEREST warrants the hermetically sealed compressor for five (5) years, not to exceed sixty (60) months from the unit's date of shipment from EVEREST.

Warranty Claims

All warranty claims for labor or parts must be made directly through EVEREST. All claims shall include: unit model number, cabinet serial number, proof of new product purchase, installation date, and all pertinent information related to the reported defect. To qualify for a compressor warranty claim, the replacement compressor must have been purchased directly from EVEREST. Claimants must submit the compressor warranty form and compressor tag to EVEREST. The compressor warranty does not apply to shipping and labor costs or other parts whether electrical or mechanical.

Warranty Exclusions

EVEREST's sole obligation under this warranty is limited to either the repair or replacement of parts, subject to the additional limitations below. This warranty neither assumes nor authorizes any person to assume obligations other than those expressly covered by this warranty.

- A. **NON WARRANTY PARTS.** EVEREST excludes specific parts exposed to normal wear and tear. These parts include, but are not limited to, lamps, gaskets, casters, shelves and shelf clips, pans, bin and pan dividers and airflow guards.
- B. **INDIRECT OR CONSEQUENTIAL DAMAGE.** EVEREST does not warrant economic loss, profit loss, or special, indirect or consequential damages including without limitation, losses or damages arising from food or product spoilage claims caused by refrigeration failure.
- C. **IMPROPER USAGE.** EVEREST is not responsible for parts or labor coverage for component failure and or other damages resulting from improper usage, installation or failure to clean and/or maintain the unit as set forth in the user's manual provided with this unit. All EVEREST units are designed for commercial use, not for residential use. Warranty is invalid if the unit is installed in a residence.
- D. **RELOCATION OF UNIT FOR REPAIR.** EVEREST is not responsible for the cost to move a unit for any reason from its position of operation on the customer's premises to make a warranty repair. Further, EVEREST is not responsible for the cost of disassembling cabinetry and/or panels built around the unit to make a warranty repair.
- E. **WARRANTY IS NOT TRANSFERABLE.** Warranty is limited to only the original purchaser, owner or lessee of the unit. Warranty does not transfer with change of ownership or lessee.
- F. **ALTERATION, NEGLIGENCE, MISUSE, ABUSE, ACCIDENT, DAMAGE DURING TRANSIT OR INSTALLATION, FIRE, FLOOD, ACTS OF GOD.** EVEREST is not responsible for malfunctions due to alteration, neglect, misuse, abuse, accident, damage during transit or installation, fire, flood, storm, and/or other acts of God. EVEREST is not responsible for any improper electrical connections resulting from electrical power failure, the use of extension cords, and low voltage or voltage drops to the unit.
- G. **UNAUTHORIZED MODIFICATION.** EVEREST is not responsible for the repair or replacement of failed or damaged components resulting from unauthorized modifications to units or the use of non OEM parts without prior written approval from EVEREST.
- H. **IMPROPER ELECTRICAL CONNECTIONS.** EVEREST is not responsible for the repair or replacement of the unit or any damaged components resulting from incorrect supply voltage, low voltage, fluctuating supply voltage, incorrect amperage age the use of extension cords, generators or other improper electrical connections.
- I. **OUTSIDE THE U.S.** This warranty does not apply to any parts and/or labor warranty claims made on units sold or used outside of the United States.

These warranties are exclusive and in lieu of all other warranties, expressed or implied, and all other obligations or liabilities on our part, and we neither assume nor authorize any other person to assume for us any other obligation or liability in connection with the sale of said refrigeration units or any part thereof.

*Terms may vary.

** Blizzard R290 replacement is at the sole discretion of Everest Refrigeration.



5 YEAR Compressor 3 YEAR Parts & Labor



Memo:



E **REFRIGERATION**
U E R E S T

A Step Above the Standard

201 W. Artesia Blvd., Compton, CA 90220

TEL 310.323.6586 | **FAX** 310.323.7524 | 310.761.1127

www.EVERESTref.com